

काठमाडौं महानगरपालिका
याँ महानगरपालिका
नगर कार्यपालिकाको कार्यालय


दररेट सिफारिस समितिको प्रतिवेदन

२०८३



प्रतिवेदकहरु:

- | | |
|---|--------------|
| १) उपनिर्देशक, जगदीश अर्याल | - संयोजक |
| २) डिभिजन इन्जिनियर, पुष्कर भट्टराई | - सदस्य |
| ३) वरिष्ठ लेखा अधिकृत, नारायण सिंह भण्डारी | - सदस्य |
| ४) वरिष्ठ इन्जिनियर, कुन्दन श्रेष्ठ | - सदस्य |
| ५) वरिष्ठ इन्जिनियर, रविन्द्र रिजाल | - सदस्य |
| ६) वरिष्ठ कविराज निरिक्षक, ज्ञान बहादुर ओली | - सदस्य |
| ७) नापी अधिकृत, अशोक श्रेष्ठ | - सदस्य |
| ८) अधिकृत, हिमाल आचार्य | - सदस्य-सचिव |


सुत्तिराम अर्याल
विभागीय प्रमुख
प्रशासन विभाग


सुत्तिराम अर्याल
प्रमुख प्रशासकीय अधिकृत

काठमाडौं महानगरपालिका
नगर कार्यपालिकाको कार्यालय
दररेट सिफारिस समितिको प्रतिवेदन

२०८३

पृष्ठभूमि:

काठमाडौं महानगरपालिका नगर कार्यपालिकाको कार्यालय र यस अन्तर्गतका निकायहरुबाट चालु आर्थिक वर्ष २०८३/०८४ का लागि खरिद गरिने मालसामान, निर्माण सामग्री, परामर्श सेवा र अन्य सेवाको लागत अनुमान र खरिद प्रयोजनका लागि दररेट सिफारिस गर्न मिति २०८३/३/३० गतेको प्रमुख प्रशासकीय अधिकृतरूपी निर्णयानुसार तपसिल बमोजिमको पदाधिकारी रहने गरी ८ (आठ) सदस्यीय दररेट सिफारिस समिति गठन भएको:


तपसिल:

- | | |
|---|--------------|
| १) उपनिर्देशक, जगदीश अर्याल | - संयोजक |
| २) डिभिजन इन्जिनियर, पुशकर भट्टराई | - सदस्य |
| ३) वरिष्ठ लेखा अधिकृत, नारायण सिंह भण्डारी | - सदस्य |
| ४) वरिष्ठ इन्जिनियर, कुन्दन श्रेष्ठ | - सदस्य |
| ५) वरिष्ठ इन्जिनियर, रविन्द्र रिजाल | - सदस्य |
| ६) वरिष्ठ कविराज निरिक्षक, ज्ञान बहादुर ओली | - सदस्य |
| ७) नापी अधिकृत, अशोक श्रेष्ठ | - सदस्य |
| ८) अधिकृत, हिमाल आचार्य | - सदस्य-सचिव |

दररेट सिफारिसका आधार:

काठमाडौं महानगरपालिकाबाट चालु आर्थिक वर्ष २०८३/०८४ मा मालसामान, निर्माण सामग्री, परामर्श सेवा र अन्य सेवा खरिदका लागि लागत अनुमान तयार गर्न आवश्यक पर्ने दररेट सिफारिस गर्दा निम्नानुसारको आधार लिइएको छ ।

- १) काठमाडौं महानगरपालिका नगर कार्यपालिकाबाट गत आर्थिक वर्षमा स्वीकृत भएको दररेट,
- २) काठमाडौं जिल्ला तथा अन्य जिल्ला भित्रका सार्वजनिक निकायहरुबाट मालसामान, निर्माण सामग्री, परामर्श सेवा र अन्य सेवाका लागि स्वीकृत गरेको दररेट,
- ३) गोरखापत्रमा प्रकाशित सूचनाबमोजिम आपूर्तिकर्ताहरुले पेश गरेको दररेट र स्थानीय बजारमा प्रचलित दरभाउ,
- ४) विभागहरुबाट उपलब्ध गराइएको दररेट,
- ५) E-commerce website हरूमा प्रकाशित दररेटहरु ।



नरेश कुमार
प्रमुख
प्रशासन विभाग



नरेश कुमार
प्रमुख
प्रशासन विभाग

सुझाव एवं सिफारिस:

काठमाडौं महानगरपालिकाबाट आर्थिक वर्ष २०८३/८४ मा मालसामान, निर्माण सामग्री, परामर्श सेवा र अन्य सेवा सार्वजनिक खरिद ऐन, २०६३ (संसोधन समेत), सार्वजनिक खरिद नियमावली, २०६४ (संसोधन समेत) वा काठमाडौं महानगरपालिका सार्वजनिक खरिद नियमावली, २०७९ (संसोधन समेत) अनुसार खरिद कार्य गर्न लागत अनुमान प्रयोजनार्थ दररेट सिफारिस सम्बन्धमा यस समितिले अध्ययन विश्लेषण र उपलब्ध भए सम्मका सामानहरुको स्पेसिफिकेसन समेत राखी विभिन्न वर्गमा विभाजन गरी प्रतिवेदनमा सामावेश गरिएको छ। स्थानीय सरकार सञ्चालन ऐन, २०७४ को दफा १३ बमोजिम यस प्रतिवेदनमा सिफारिस भएका दररेट नगर कार्यपालिकाबाट स्वीकृत गराई कार्य गर्न निम्नानुसारको सिफारिस सहित पेश गरिएको छ।


- १) काठमाडौं महानगरपालिकालाई आवश्यक पर्ने मालसामान, निर्माण सामग्री, परामर्श सेवा र अन्य सेवाको प्रचलित नियमानुसार खरिदका लागि तयार गरिने लागत अनुमानमा यस प्रतिवेदनमा उल्लेखित दररेटलाई आधारका रूपमा प्रयोग गर्न सकिनेछ।
- २) यस प्रतिवेदनमा एउटै प्रकृतिको वस्तु वा सेवाको दररेट एकभन्दा बढी स्थानमा उल्लेख भएको पाइएमा न्यूनतम दररेटलाई आधार मान्नुपर्ने छ।
- ३) यस प्रतिवेदनमा उल्लेखित कुनै विवरणको दररेट काठमाडौं जिल्लाको स्वीकृत दररेटमा समेत उल्लेख भएको पाइएमा दुवै दररेट मध्ये कम दररेटलाई आधार मान्नुपर्ने छ। साथै यस प्रतिवेदनमा उल्लेख नभएको तर काठमाडौं जिल्ला दररेटमा उल्लेख भएको दररेटको हकमा काठमाडौं जिल्ला दररेटलाई आधार मान्नुपर्ने छ। काठमाडौं जिल्लाको दररेट तथा यस प्रतिवेदन दुबैमा उल्लेख नभएको विवरणको सम्बन्धमा प्रचलित सार्वजनिक खरिद सम्बन्धी कानुनी व्यवस्था बमोजिम गर्नुपर्ने छ।
- ४) यस प्रतिवेदनमा उल्लेखित मालसामान, निर्माण सामग्री, परामर्श सेवा र अन्य सेवाको दररेटमा मूल्य अभिवृद्ध कर (VAT) बाहेकको दर उल्लेख गरिएको छ।
- ५) Essential Medicine को सूचीमा समावेश नभएका औषधीहरुको दर स्वास्थ्य बीमा बोर्डको सुविधा थैलीमा उल्लेख भए बमोजिम गर्न सकिने छ।
- ६) यस प्रतिवेदनमा उल्लेखित कुनै विवरणहरुको दररेट हेरफेर गर्नु परेमा श्रीमान् प्रमुखज्यूको निर्णयानुसार हुनेछ।



ने. क. कarki
विभागीय प्रमुख
प्रशासन विभाग


मुक्तिराम अर्याल
प्रमुख प्रशासकीय अधिकृत

विषय-सूची

सि.नं.	विवरण	पाना नं
१	उपहार सम्बन्धी सामग्री	१-१
२	स्टेशनरी सम्बन्धी सामग्री	२-४
३	कार्यालय मालसामान सम्बन्धी सामग्री	५-६
४	किचनमा प्रयोग हुने सामग्री	७-८
५	फर्निचर जन्य सामग्री	९-१०
६	विद्युतीय सामग्री	१०-१२
७	हार्डवेयर सम्बन्धी मालसामान	१२-१२
८	खेलकुद सम्बन्धी सामग्री	१३-१३
९	सूचना प्रविधि सम्बन्धी सामग्री	१४-२७
१०	मेट्रो एफएमबाट प्रसारण हुने कार्यक्रम सम्बन्धी	२७-२७
११	Mapping सम्बन्धी कार्य	२८-३०
१२	बोटबिरुवा र उद्यान सामग्री	३०-३२
१३	बाद्य वादनका सामग्री	३२-३४
१४	व्यायाम सम्बन्धी सामग्री	३४-४०
१५	विपद व्यवस्थापन सम्बन्धी सामग्री	४०-४६
१६	Medical and Lab Equipment	४६-५३
१७	Ayurveda Medicine	५३-५४
१८	Essential Medicine	५४-५७
१९	निर्माण सम्बन्धी सामग्री	५७-५८
२०	सम्पदा तथा पर्यटनसँग सम्बन्धित	५९-६०
२१	वातावरण व्यवस्थापनसँग सम्बन्धित	६०-६१
२२	संघ संस्थाबाट कार्य गर्दा लिईने सेवा र सामग्री	६२-६२
२३	परामर्श सेवा	६३-६५
२४	होटल तथा रिसोर्टमा गरिने कार्यक्रम सम्बन्धित	६६-६७


 महेश कुमार काफ्ले
 विभागीय प्रमुख
 प्रशासन विभाग


 सुक्तिराम अर्याल
 प्रमुख प्रशासकीय अधिकृत

उपहार सम्बन्धी सामग्री

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१	टोपी	क्याप टोपी (मल्टिकलर)	थान	४००
२	खादा	ढाकाको विभिन्न कलरको	थान	१२०
३	सल	पस्मिना / दोसल्ला	थान	३,०००
४	टोपी	भादगाउँले	थान	४५०
५	टोपी	ढाका	थान	९००
६	पर्स	ढाका	थान	५००
७	थैली	कपडाको	थान	४००
८	खुकुरी दाप सहित	६ ईञ्च	थान	२,५००
९	खुकुरी दाप सहित	८ ईञ्च	थान	४,०००
१०	खुकुरी दाप सहित	१० ईञ्च	थान	५,०००
११	करुवा	०.५ लिटर कलात्मक ढलौट	थान	१,५००
१२	करुवा	७" height and Plane design	थान	२,५००
१३	मुर्ति	बुद्धको का.म.पा.को नाम र लोगो ईचिड गरी सिसाको फ्रेम भित्र ६ ईञ्चको	थान	२,०००
१४	मुर्ति	बुद्धको का.म.पा.को नाम र लोगो ईचिड गरी सिसाको फ्रेम भित्र ८ ईञ्चको	थान	३,०००
१५	मुर्ति	बुद्धको का.म.पा.को नाम र लोगो ईचिड गरी सिसाको फ्रेम भित्र १२ ईञ्चको	थान	५,०००
१६	मुर्ति	बुद्धको का.म.पा.को नाम र लोगो ईचिड गरी बक्स सहित ४ ईञ्चको ढलौटको	थान	२,२००
१७	मुर्ति	बुद्धको का.म.पा.को नाम र लोगो ईचिड गरी बक्स सहित ६ ईञ्चको ढलौटको	थान	४,०००
१८	मुर्ति	बुद्धको का.म.पा.को नाम र लोगो ईचिड गरी बक्स सहित ८ ईञ्चको ढलौटको कलात्मक	थान	५,०००
१९	मन्दिर	पशुपतिनाथको मन्दिर का.म.पा.को नाम र लोगो ईचिड गरी सिसाको फ्रेम सहित ६ ईञ्चको कलात्मक	थान	३,०००
२०	मन्दिर	पशुपतिनाथको मन्दिर का.म.पा.को नाम र लोगो ईचिड गरी सिसाको फ्रेम भित्र ८ ईञ्चको कलात्मक	थान	४,०००
२१	मन्दिर	पशुपतिनाथको मन्दिर का.म.पा.को नाम र लोगो ईचिड गरी सिसाको फ्रेम भित्र १२ ईञ्चको	थान	६,५००
२२	मन्दिर	स्वयम्बुको आकृतिमा का.म.पा.को नाम र लोगो ईचिड सहित सिसा भित्र ६ ईञ्चको	थान	३,०००
२३	मन्दिर	स्वयम्बुको आकृतिमा का.म.पा.को नाम र लोगो ईचिड गरी सिसाको फ्रेम भित्र ८ ईञ्चको	थान	३,५००
२४	मन्दिर	स्वयम्बुको आकृतिमा का.म.पा.को नाम र लोगो ईचिड गरी सिसाको फ्रेम भित्र १२ ईञ्चको	थान	७,०००
२५	मयुर झ्याल	काठको मयुर झ्याल ६ ईञ्चको कलात्मक	थान	३,०००
२६	मयुर झ्याल	काठको मयुर झ्याल १० ईञ्चको कलात्मक	थान	५,०००
२७	मयुर झ्याल	काठको मयुर झ्याल १२ ईञ्चको कलात्मक	थान	७,०००
२८	मञ्जु श्री मुर्ति	का.म.पा.को नाम र लोगो ईचिड सहित ६ ईञ्चको कलात्मक ढलौट	थान	४,५००
२९	माला	सयपत्री फुलको	थान	१२०
३०	बुके	टेबुल	थान	१,०५०
३१	बुके	बास्केट	थान	८५०
३२	गुच्छा	फुलको	थान	१२५
३३	रिबन(Ribbon)	कपडाको	मिटर	८
३४	पानस	ढलौट/ पितलको गणेशको मुर्ति भएको २७ इन्च अग्लो	थान	१८,०००
३५	फुलको रिद		थान	३,०००
३६	फुल	विभिन्न दिवसमा हलिकप्टरबाट खसाल्ने	के जी	५५०
३७	बेलुन	विभिन्न दिवसमा उडाउने/सजाउने	थान	३०

स्टेसनरी सम्बन्धी सामग्री

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१	कार्यालयको छाप	ब्राक्लो फममा गोलो र चारपाटे सेल्फ ईङ्क	थान	४००
२	कार्यालयको छाप (रबर स्ट्याम्प)	ब्राक्लो रबरमा गोलो र चारपाटे	थान	२५०
३	नाम तथा पद लेखेको छाप	चारपाटे सेल्फ ईङ्क	थान	४००
४	नेम प्लेट	प्लास्टिकको मिडियम साईज (८*१२ ईञ्च)	थान	१,०००
५	नेम प्लेट	प्लास्टिकको ठुलो साईज (१८*२४ ईञ्च)	थान	२,५००
६	नेम प्लेट	तामा/पितलमा इचिड गरेको मिडियम साईज (८*१२ ईञ्च)	थान	५,०००
७	नेम प्लेट	तामा/पितलमा इचिड गरेको ठुलो साईज (१८*२४ ईञ्च)	थान	७,५००
८	टेबल नेम प्लेट	आलमुनियमको	थान	१,५००
९	टेबल नेम प्लेट	काठको	थान	६००
१०	स्ट्याम्प प्याड	कालो/निलो ११० ७० एम एम	थान	५०
११	व्याचहरु रिबन (१) कलर	विभिन्न कलरको रिबन	थान	८०
१२	व्याचहरु रिबन (२) कलर	विभिन्न कलरको रिबन	थान	१२५
१३	व्याचहरु रिबन (४) कलर	विभिन्न कलरको रिबन	थान	२००
१४	प्रमाणपत्र	कलर A४ साईज	थान	५०
१५	प्रमाणपत्रको फ्रेम	गोल्डेन A४ साईजका लागि	थान	५००
१६	फ्लेक्स ब्यानर विभिन्न साईज तथा डिजाईनको (प्रिन्ट मात्र)	मल्टिकलर	वर्ग फिट	५०
१७	फ्लेक्स ब्यानर विभिन्न साईज तथा डिजाईनको (प्रिन्ट तथा फलामको फ्रेम सहित)	मल्टिकलर	वर्ग फिट	१५०
१८	भिजिटिङ्ग कार्ड	मल्टिकलर	थान	५
१९	निमन्त्रणा कार्ड	१ कलर	थान	१०
२०	निमन्त्रणा कार्ड	मल्टिकलर	थान	१५
२१	कपडाको ब्यानर	विभिन्न साईज (सुती)	मिटर	७००
२२	महानगर झण्डा	६ फिट	थान	१,२००
२३	महानगर झण्डा	४ फिट	थान	८००
२४	महानगर झण्डा	१ फिट	थान	
२५	महानगर झण्डा	१ फिट काठको स्टेण्ड सहित	थान	८००
२६	नेपालको राष्ट्रिय झण्डा	६ फिट	थान	१,२००
२७	नेपालको राष्ट्रिय झण्डा	४ फिट	थान	८००
२८	नेपालको राष्ट्रिय झण्डा	१२ फिट	थान	१,६००
२९	नेपालको राष्ट्रिय झण्डा	१ फिट काठको स्टेण्ड सहित	थान	८००
३०	नेपालको राष्ट्रिय झण्डा	१ फिट पित्तलको स्टेण्ड सहित	थान	१,२००
३१	नेपालको राष्ट्रिय झण्डा	१० मिटर	थान	३१,०००
३२	नेपालको राष्ट्रिय झण्डा	८ मिटर	थान	२७,०००
३३	नेपालको राष्ट्रिय झण्डा	६ मिटर	थान	१९,०००
३४	नेपालको राष्ट्रिय झण्डा	४ मिटर	थान	१०,०००
३५	भिन्ने घडी	Analog, small size (12inch diameter)	थान	१,१५०
३६	भिन्ने घडी	Analog, medium size (18 inch diameter)	थान	१,७००
३७	भिन्ने घडी	Analog, large size (24 inch diameter)	थान	२,२००
३८	डायरी	एक्जुकेटिभ / महानगर	थान	५००
३९	डायरी	स्पाइरल, Minimum ४० page	थान	१००
४०	रजिस्टर	५० पाने ८० ग्राम पेपर उड फ्री	थान	३००
४१	रजिस्टर	१०० पाने ८० ग्राम पेपर उड फ्री	थान	४५०

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
४२	माईन्युट रजिष्टर	बाहिरी कभरमा कपडाले बाइन्डिङ गरिएको १००पाने	थान	१,०५०
४३	खाम	भिन्न कपडा भएको फाइल Size नेपाली कागजमा का.म.पा.को नाम र लोगो प्रिन्ट भएको	थान	२५
४४	खाम	A४ Size नेपाली कागजमा का.म.पा.को नाम र लोगो प्रिन्ट भएको	थान	२०
४५	खाम	७"×५" इन्चको नेपाली कागजमा का.म.पा.को नाम र लोगो प्रिन्ट भएको	थान	१०
४६	ट्रान्सपरेन्ट पेपर (Binding Plastic)	A4 Size	थान	८
४७	रबर	१ के जी को	प्याकेट	१,१००
४८	Photocopy work	single side (B/W)	पेज	४
४९	Photocopy work	both side (B/W)	पेज	५
५०	Photocopy Binding	२५० पेज सम्मको टेप बाइन्डिङ	थान	६०
५१	Photocopy	A3 Size	थान	१५
५२	Printing	A0 Size (90 GSM), Color Print	थान	१,६००
५३	Printing	A1 Size (90 GSM), Color Print	थान	१,०००
५४	टोनर रिफिल/cartridge Refill	refilling with original ink for cartridges used in all types of printers	थान	५००
५५	बाइन्डिङ टेप	१ इन्ची	थान	१५०
५६	बाइन्डिङ टेप	१.५ इन्ची	थान	२००
५७	बाइन्डिङ टेप	२ इन्ची	थान	२५०
५८	टेप	कार्टुन	थान	४००
५९	टेप	सेलो सानो	थान	२०
६०	टेप	सेलो मझौला	थान	१००
६१	टेप	सेलो ठुलो	थान	२००
६२	पेपर कटर	paper cutter with blade	थान	२००
६३	पेन होल्डर/पेन स्ट्याण्ड	काठको	थान	१,८००
६४	नेपाली पेपर	A४ Size २० ग्राम, १०० पानाको प्याड	प्याड	४००
६५	नेपाली पेपर	A४ Size ४० ग्राम, १०० पानाको प्याड	प्याड	८००
६६	मेटा कार्ड	Breadth 22.5cm and length 10.1cm Multi Color (Size in Approx.)	प्याकेट	५०
६७	कार्ड होल्डर	डोरी सहित साधारण	थान	१००
६८	स्ट्याम्प प्याड	११०×७० वर्ग मि.मि.	थान	५०
६९	टेबल च्याक	प्लाष्टिकको तिन लेयर	थान	१,८००
७०	डटपेन	मोनटेक्स वा सो सरह	थान	१५
७१	जेलपेन	सेलो प्वाइन्टेक्स ०.५ कालो र रातो वा सो सरह	थान	३५
७२	पाइलट पेन	V5 JF वा सो सरह कालो निलो रातो र हरियो	थान	१३५
७३	पाइलट पेन	V7 JF वा सो सरह कालो निलो रातो र हरियो	थान	१४५
७४	पाइलट पेन	V10 Grip Hi-Techpoint वा सो सरह कालो र रातो	थान	१६५
७५	मार्कर	बोर्ड मार्कर विभिन्न कलरका Snowman वा सो सरह	थान	५०
७६	परमानेन्ट मार्कर	विभिन्न कलरको क्लयफेबल वा सो सरह	थान	६०
७७	बोर्ड डस्टर		थान	६०
७८	हाइलाइटर	विभिन्न कलरको Staedtler वा सो सरह	थान	५०
७९	साइन पेन		थान	४०
८०	पेन्सिल	HB	थान	१२
८१	इरेजर		थान	१०
८२	पेन्सिल कटर		थान	१०
८३	टोनर मसि	Dust, Black	थान	२५०
८४	इन्डेक्स फायल	प्लाष्टिक हाई कभर	थान	२३०
८५	फोल्डर फायल	नमुनानुसार प्लाष्टिकको	थान	४०
८६	रिंग फायल	ए ४ साइज, २ Ring Binder	थान	२१०
८७	फाइल तुना		मुठा	३०
८८	रेकर्ड फाइल		थान	१०

महोदय
सहायक प्रमुख
आयोजना विभाग

श. मुक्तिराम अर्याल

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
८९	कोब्रा फाईल		थान	६५
९०	बक्स फाइल		थान	१५०
९१	नेपाली फाईल		थान	२०
९२	फाइल बाइन्डिङ		थान	१४०
९३	फाइल स्ट्याण्ड		थान	१,५००
९४	खाम	चेक साइज, सादा	थान	३
९५	कार्बन पेपर	केमेल वा सो सरह	प्याकेट	३५०
९६	फोटोकपी पेपर	A४ size ८० gsm , जे.के Copier वा सो सरह	रिम	६८५
९७	फोटोकपी पेपर	A३ size जे.के Copier वा सो सरह	रिम	१,५००
९८	फोटोकपी पेपर	A४ size ८० gsm , जे.के Copier वा सो सरह कलरमा	रिम	७००
९९	फोटोकपी पेपर	A४ size ७० gsm , जे.के Copier वा सो सरह कलरमा	रिम	५००
१००	पोसिड पेपर	टास्ने, ५० सिट	थान	५२
१०१	Sticky Notes	1 Pack of Self-Stick Notes 0.6 x 3 Inch, 5 colorsx100 sheets	थान	८०
१०२	थर्मल पेपर	e ticket को लागि प्रयोग हुने, ३ inch, ८० mm	रोल	३००
१०३	पेपर क्लीप	१०० पिस प्याकेट	प्याकेट	१५०
१०४	बाइन्डिङ कभर पेपर	१०० पिस प्याकेट	प्याकेट	६००
१०५	थम्बपिन		प्याकेट	१००
१०६	प्लास्टिक स्केल	15 cm	थान	३०
१०७	प्लास्टिक स्केल	30 cm	थान	६०
१०८	My Clear bag	प्लाष्टिकको बटन भएको,	थान	२५
१०९	पन्चिङ मेशिन ठूलो	कंगारो २०३२ वा सो सरह	थान	६,०००
११०	पन्चिङ मेशिन मझौला	कंगारो ८०० वा सो सरह	थान	२,२००
१११	पन्चिङ मेशिन सानो	८ सि.एम कंगारो ६०० वा सो सरह	थान	३००
११२	स्ट्याप्लर मेशिन	सानो (No1-1m) कंगारो वा सो सरह	थान	८०
११३	स्ट्याप्लर मेशिन	मझौला 600 HD-45 कंगारो वा सो सरह	थान	३५०
११४	स्ट्याप्लर मेशिन	ठूलो HD-23S 25 कंगारो वा सो सरह	थान	३,०००
११५	स्ट्याप्लर पिन	मझौला २४१६ कंगारो वा सो सरहको १ वट्टा २० प्याकेट भएको	प्याकेट	६००
११६	स्ट्याप्लर पिन ठूलो	ठूलो कंगारो वा सो सरहको १ वट्टा २० प्याकेट भएको	प्याकेट	२,०००
११७	स्ट्याप्लर पिन	सानो कंगारो वा सो सरहको १ वट्टा, २० प्याकेट भएको	प्याकेट	५३५
११८	ग्लु स्टिक	Amos Korean वा सो सरह ३५ ग्राम	थान	९०
११९	स्केल	स्टिल १८ इन्चको	थान	९०
१२०	टिप्पणी फाइल		थान	७
१२१	सवारी लगबुक	६० ग्राम पेपरमा १०० पानाको प्याड	प्याड	२२०
१२२	आगन्तुक परिचय पत्र	Design and Print	थान	३२०
१२३	आगन्तुक परिचय पत्र	साधारण प्लास्टिक कभर भएको	थान	१००
१२४	कर्मचारी अस्थायी परिचय पत्र		थान	१३
१२५	बारकोड स्टीकर	१००० पिसको रोल	रोल	१,४५५
१२६	पिन रिमुभर		थान	४५०
१२७	पुस पिन		प्याकेट	१८९
१२८	हार्डकभर बाइन्डिङ	Minimum 100 page	थान	५००
१२९	भिनाइल स्टिकर		ब फि	१३०
१३०	स्टिकर		ब फि	१२०
१३१	टेबुल घन्टी	Set	थान	१,२००
१३२	आगन्तुक परिचय पत्र डोरी	नाइलन विभिन्न कलरको	के.जी.	८००
१३३	टिस्यु पेपर बक्स	सिल्भर कोटेड	थान	१,८९०
१३४	डमी चेक		वर्ग फिट	४२६

५. सात्कराम अयालि

कार्यालय मालसामान सम्बन्धी सामग्री

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१	Automatic Room Spray	liquid with Machine	थान	१,२००
२	Automatic Room Spray	liquid only	थान	३००
३	Abdominal Towel		थान	५००
४	Plastic Dust Bin	१० लिटर क्षमता	थान	५००
५	Plastic Dust Bin	१५ लिटर क्षमता	थान	६५०
६	Plastic Dust Bin	२० लिटर क्षमता	थान	८५०
७	Plastic Dust Bin	२५ लिटर क्षमता	थान	१,७००
८	Plastic Dust Bin (सडकमा राख्ने)	८० लिटर क्षमताको पाङ्गा भएको	थान	४,५००
९	Insect Killer Bat	rechargeable	थान	५००
१०	Mosquito Repellent Machine	device with 45 ml liquid	थान	३००
११	mosquito repellent liquid	४५ एम एल	थान	८०
१२	Paper Cup	Minimum 150 ml	थान	३
१३	अविर	५० ग्राम	प्याकेट	२५
१४	Floor Cleaner	एरोम्याक्स Equivalent	थान	२२५
१५	एसिड	dilute HCl	लिटर	२५०
१६	कास्टिक सोडा		के जी	३८०
१७	कुचो	अमिसो	थान	११०
१८	खरेटो	नरिवल वा सो सरह	थान	११०
१९	कुशन	Minimum 1.5 x 1.5 sq ft	थान	३००
२०	क्याल्कुलेटर (Calculator)		थान	१,०००
२१	क्याल्कुलेटर (Calculator)	scientific calculator fx 991 es plus or equivalent	थान	२,०००
२२	रिबल्वड चियरको चक्का	फिटिङ सहित	थान	३००
२३	छाता	XXL Size, radius 30"	थान	१,२००
२४	छाता	सानो फोल्डिङ गर्न मिल्ने	थान	६००
२५	छाता	७ फिट अग्लो, गार्डेनिङ छाता	थान	३,०००
२६	झोल सावुन		लिटर	३००
२७	टेन्ट भाडामा		वर्ग फिट	५०
२८	टेबुल घर्मी लक		थान	२५०
२९	ट्यांका	२ फिटको	थान	२,०००
३०	ट्यांका	४ फिटको	थान	४,०००
३१	बर्षादी (Rain coat)	single piece / two piece	थान	२,५००
३२	ट्वाइलेट ब्रस		थान	२००
३३	डोर क्लोजर	हाइड्रोलिक	थान	२,५००
३४	तकिया (सिरानी)	खोल सहित	थान	६००
३५	तन्ना	Single Bed	थान	८००
३६	तन्ना	Double bed	थान	१,२००
३७	तालचा	Key Normal SS Link Lock, Padlock Size: 40 mm,	थान	७००
३८	तालचा	padlock size 75 mm	थान	१,१००
३९	दराज लक		थान	१,५००
४०	धुप (अगरवती)		प्याकेट	६०
४१	पछाडी बोक्ने व्याग		थान	३,०००
४२	पितलको गमला	7.5 inch hight and 8 in diameter	थान	१,७००
४३	पुनिङ स	320 mm long, Permanently filed teeth , triple edge with plastic/wood handle	थान	८००
४४	पेपर बेट		थान	२००
४५	प्रमाण पत्रको काठको मैयुर फ्रेम		थान	१,७००
४६	प्रोजेक्टर प्वाइन्टर	rechargeable, laser	थान	२,५००
४७	फिनेल	सेतो झोल	लिटर	२३०
४८	फिनेल	दाना १/२ के.जी.	प्याकेट	४५०
४९	फिनेल	कालो झोल	लिटर	७५०

क्र.स.	मालसामानको विवरण	स्पेसिफिकेशन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
५०	प्लाष्टिक बाटा	२० लिटर	थान	५००
५१	प्लाष्टिक बाटा	१० लिटर	थान	३५०
५२	प्लाष्टिक बाल्टिन	२० लिटर	थान	५००
५३	प्लाष्टिक बाल्टिन	१० लिटर	थान	३५०
५४	Insect killer spray	बेगन Equivalent	थान	६५०
५५	बेतको लाठि		थान	३५०
५६	सुटकेश	18 inch	थान	५,०००
५७	सुटकेश	22 inch	थान	८,०००
५८	सुटकेश	24 Inch	थान	१०,०००
५९	Hand carry Bag		थान	३,०००
६०	भाडा धुने साबुन	65 gm	थान	१५
६१	भाडा माइने पाउडर	भिम बा सो सरह १/२ के जी	प्याकेट	५०
६२	भुईं पुछने कपडा		थान	९०
६३	मस्कूईटो क्याइल(Mosquito Coil)		थान	६०
६४	मेजरिड टेप	१०० मिटर कोमेलन वा सो सरह	थान	८,९६०
६५	मेजरिड टेप	५० मिटर कोमेलन वा सो सरह	थान	४,६४०
६६	मेजरिड टेप	३० मिटर कोमेलन वा सो सरह	थान	३,६८०
६७	मेजरिड टेप	२५ मिटर कोमेलन वा सो सरह	थान	३,०१०
६८	मेजरिड टेप	५ मिटर, komelon(ECO) or equivalent	थान	१,३६०
६९	रुम स्प्रे		थान	२२५
७०	रुम स्प्रे	एरोविक	थान	५५०
७१	ग्यास लाइटर		थान	१५०
७२	लिविड हेण्ड वास	२०० एम.एल.	थान	२२५
७३	कपडा धुने साबुन	१०० ग्राम	थान	३०
७४	लेदर अफिस व्याग	W15"*H11"*B5"	थान	१५,०००
७५	वाईपर	डण्डी सहित	थान	४५०
७६	डिटरजेन्ट पाउडर	१/२ के जी	प्याकेट	५०
७७	डिटरजेन्ट पाउडर	१ के जी	प्याकेट	१००
७८	सिङ्गी		थान	१५०
७९	सिरक	White Cotton, Single Bed खोल सहित	थान	३,०००
८०	सिरक	White Cotton, Double bed खोल सहित	थान	४,०००
८१	Blankets	Single Bed	थान	२,५००
८२	Blankets	Double bed	थान	३,५००
८३	डसना	Single Bed खोल सहित	थान	२,०००
८४	डसना	Double Bed खोल सहित	थान	२,५००
८५	सुतली		के जी	४००
८६	टवाइलेट पेपर	१० रोलको	प्याकेट	८८०
८७	स्टिलको गमला		थान	२,५००
८८	स्प्रे प्रिन्ट	४०० एम एल	थान	५५०
८९	दराजमा राख्ने हेडगर	काठको	थान	१२०
९०	दराजमा राख्ने हेडगर	प्लाष्टिकको	दर्जन	४२०
९१	Rat Poison/Rat Cake		थान	३००
९२	Air Freshner	प्रति प्याकेट ४ पिस भएको ओडोनिल वा सो सरहको	प्याकेट	३५०
९३	कोरा कपडा		मिटर	१०५
९४	फलाटिन कपडा		मिटर	५०
९५	ग्लास क्लिनर	कोलिन वा सो सरह ५०० ml	थान	१५०
९६	युरिन प्याड		थान	३२०
९७	झुल	डबल बेड	थान	८००
९८	पि फर्म	8mm	मिटर	२००
९९	पि फर्म	10mm	मिटर	३००
१००	पि फर्म	12mm	मिटर	३७५
१०१	बेट टिस्यु	Packet	थान	२००
१०२	सिल टेप(Seal Tape)		थान	४५
१०३	सेनिटाइजर	100ml	थान	८०
१०४	प्लाष्टिकको गिलास	Minimum 200 ml	थान	२
१०५	सिक्रि	5*9 mm	मिटर	३२५

किचनमा प्रयोग हुने सामग्री

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१	क्लोरीन पाउडर		के जी	३७५
२	Hotcase	5 litre	थान	३,५००
३	Rice cooker	5 litre	थान	४,५००
४	Rice cooker	10 litre	थान	९,५००
५	Rice cooker	3 litre	थान	३,०००
६	Tray/ किस्ती	plastic	थान	३५०
७	Tray/ किस्ती	स्टिलको	थान	८००
८	अम्बोरा	तामाको	थान	५००
९	ईलेक्ट्रिक थर्मस	५ लिटर	थान	५,०००
१०	ईलेक्ट्रिक थर्मस	३.८ लिटर	थान	४,०००
११	थर्मस	१ लिटर	थान	१,४००
१२	एप्रोन	कपडाको भाँडा माइदा प्रयोग गर्ने	थान	३००
१३	कचौरा	मेलामाइनको	थान	२००
१४	कचौरा	ठुलो स्टिलको	थान	२००
१५	कचौरा	सेरामिक्स	थान	२००
१६	कचौरा	सानो स्टिलको	थान	१२०
१७	कप	सिसाको ६ पिसको १ सेट	सेट	१,०००
१८	कप	सेरामिक्स ६ पिसको १ सेट	सेट	४५०
१९	प्लेट	मेलामाइन, Min १० inch dia	थान	४००
२०	प्लेट	सेरामिक्स, Min १० inch dia	थान	५००
२१	प्लेट	स्टिलको ठुलो, Minimum १५ inch dia	थान	२००
२२	प्लेट	स्टिलको सानो, min ८ inch dia	थान	१२०
२३	कपसेट	स्टिलको ६ पिसको १ सेट	सेट	१,२००
२४	कफि	१ केजी प्याकेट	के.जी	१,४००
२५	कफि बिनस	१ केजी प्याकेट	के.जी	२,५००
२६	कोरेशा		थान	३००
२७	कितली	२ लिटर	थान	१,४००
२८	खलो	मिडियम साइजको	थान	१,०००
२९	चक्कु	काठको बिँड भएको	थान	४२५
३०	गाथ्री	तामाको २ केजीको १८ इन्च उचाई भएको	थान	७,५००
३१	ग्यास चुले	Single burner stainless steel	थान	२,५००
३२	ग्यास चुले	Double burner stainless steel	थान	४,९००
३३	ग्यास चुले	Double burner, Automatic, stainless steel	थान	५,५००
३४	ग्यास पाइप	ISO certified	मिटर	१५०
३५	ग्यास रेगुलेटर	Iso certified	थान	७५०
३६	ग्रिन टी	प्रति के.जी.	थान	२,०००
३७	ग्रिन टी पट	१०० एम एल	थान	१,०००
३८	चपिड बोर्ड	काठको	थान	७५०
३९	चप्पल		जोर	३००
४०	चम्चा	Steel Material	थान	१२०
४१	चिम्टा	Steel Material	थान	५००
४२	चिया छात्रे जाली	Steel material	थान	२००
४३	चिया पत्ति		के.जी.	१,२००
४४	चुले	ईण्डक्सन १वर्नर	थान	४,०००
४५	चुले	ईन्फ्रारेड १वर्नर	थान	४,०००

क्र.स.	मालसामानको विवरण	स्पेसिफिकेशन	एकाइ	आ.ब.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
४६	जर्किन	१० लिटर, Plastic	थान	३५०
४७	जर्किन	२० लिटर, Plastic	थान	५२५
४८	झाझर	Steel material	थान	३००
४९	टि म्याट	६ थानको सेट	सेट	३००
५०	टिस्यू पेपर	१०० pulls premium वा सो सरह	थान	१३५
५१	ट्वाइलेट पम्प		थान	२००
५२	डस्ट पिकर(Dust Picker)	प्लास्टिकको	थान	१००
५३	डस्ट पिकर(Dust Picker)	स्टिलको/टिनको	थान	२५०
५४	डाडु	स्टिलको	थान	३००
५५	पन्यु	स्टिलको	थान	३००
५६	डिब्बा	मसला राख्ने प्लास्टिकको	थान	५००
५७	डेक्ची	१० लिटर, आल्मोनियम/सिल्भर	थान	८,०००
५८	डेक्ची	५ लिटर आल्मोनियम/सिल्भर	थान	४,८००
५९	डेक्ची	३ लिटर आल्मोनियम/सिल्भर	थान	२,५००
६०	ड्रम	प्लास्टिकको १०० लिटर	थान	२,०००
६१	ताप्के	स्टिलको २ लिटर	थान	२,०००
६२	ताप्के	स्टिलको ३ लिटर	थान	२,४००
६३	ताप्के	ननस्टिकी २ लिटर	थान	२,५००
६४	तावा	फलामको	थान	९५०
६५	थाल	स्टिलको	थान	४५०
६६	पानी खाने गिलास	स्टिलको, Min २०० ml	थान	१५०
६७	पानी खाने गिलास	सिसाको, Min २०० ml	थान	६५
६८	पानी खाने बोटल	भिन्न बाहिर तामा भएको १ लिटर minimum क्षमताको	थान	१,८००
६९	पानी खाने बोटल	प्लास्टिकको, १ Liter minimum	थान	२२५
७०	पानी खाने सिसाको जग	१ लिटर, Borosil or equivalent	थान	१,५००
७१	पानी खाने स्टिलको जग	१ लिटर	थान	५५०
७२	मग	प्लास्टिकको	थान	९२
७३	प्रेसर कुकर	५ लिटर	थान	३,०००
७४	प्रेसर कुकर	१० लिटर	थान	५,५००
७५	प्रेसर कुकर	३ लिटर	थान	२,५००
७६	प्रेसर कुकर ननस्टिकी	५ लिटर नन स्टिक	थान	४,५००
७७	प्रेसर कुकर ननस्टिकी	१० लिटर	थान	६,५००
७८	प्रेसर कुकर ननस्टिकी	३ लिटर	थान	३,५००
७९	कराइ	३ लिटर नन स्टिक	थान	२,८००
८०	कराइ	५ लिटर नन स्टिक	थान	४,०००
८१	पिताम्बरी	१०० ग्राम	प्याकेट	३९०
८२	प्लाष्टिक मिनी स्टुल		थान	३५०
८३	फ्राइप्यान	ननस्टिक	थान	१,५००
८४	बेलना चौकी		थान	६७५
८५	भिन्न तामा भएको जग	१ लिटर	थान	१,८००
८६	भुइ पुच्छने रुमाल		थान	१५०
८७	फ्लोवर क्लिनर	लाइजोल वा सो सरह ५०० एम एल	थान	६५०
८८	लाईटर	साधारण	थान	२५
८९	वाटर डिस्पेन्सर	तातो चिसो आउने ईलेक्ट्रोनिक	थान	८,०००
९०	स्टील उल(भाडा माइने झाली)		थान	६३
९१	इलेक्ट्रिक जग	minimum १.५ लिटर	थान	१,८००
९२	gaskete	प्रेसर कुकरको	थान	१३०

मन्त्रालय
विज्ञान विभाग

फर्निचर जन्य सामग्री

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१	हवाईट बोर्ड	४X २ वर्ग फिट	थान	३,०००
२	कुर्सी	हात भएको काठको	थान	५,५००
३	कुर्सी	हात नभएको काठको	थान	५,०००
४	कुर्सी	फोल्डिङ गर्न मिलने स्टिलको	थान	४,०००
५	Revolving Chair	साधारण	थान	८,५००
६	Revolving Chair	Heavy	थान	२२,०००
७	Revolving Chair	Executive	थान	३०,०००
८	Tea Table	काठको २x४ वर्ग फिट	थान	१२,०००
९	Table	Executive	थान	४०,०००
१०	Office Table	काठको २.५x४ वर्ग फिट	थान	१६,०००
११	Office Table	काठको ३x५ वर्ग फिट	थान	२४,०००
१२	Computer Table	काठको २x३ वर्ग फिटको	थान	८,०००
१३	Table	काठको चार खुट्टा भएको २.५x३ वर्ग फिटको	थान	८,०००
१४	दराज	Metal २० Gauge, Minimum ५ फिट उचाई भएको	थान	१५,०००
१५	दराज	Supplying and Fixing of approved good quality lockable steel Glassdoor Cupbord of size (5'6"x2'8" or morex1'x8") iron used in 20 gauge and shutter	थान	१८,५००
१६	दराज	metal २० Gauge, ४.५ फिट उचाई भएको	थान	१२,५००
१७	दराज	Supplying and Fixing of approved good quality lockable steel Cupbord of size (5'6"x2'8" or morex1'x8") iron used in 20 gauge and shutter	थान	२२,०००
१८	दराज	Glass Door २० Gauge, ६ फिट उचाई भएको	थान	२०,५००
१९	File Cabinet	Supplying and Fixing of central locking mild steel file cabinet containing 4 layer of size (4'Hx2'wx1'6")	थान	२०,५००
२०	Open Rack	Supplying and fixing of approved good Quality open rack of size (6'x3'x1'8") iron used in 20 gauge	थान	७,५००
२१	Rack	open wood फरमाइका जडान गरेको फिटिङ समेत १८ एम एम को बोर्ड भएको	वर्ग फिट	२,१००
२२	डोर म्याट	जुटको	थान	९५०
२३	डोर म्याट	Fancy	थान	१,२००
२४	अल्टिमेट डोर म्याट		वर्ग फिट	२१५
२५	कार्पेट	फिटिङ सहित साधारण	वर्ग फिट	५१
२६	कार्पेट	फिटिङ सहित बुट्टेदार	वर्ग फिट	११५
२७	कार्पेट	फिटिङ सहित डिलक्स	वर्ग फिट	१६५
२८	टाट/प्लास्टिक कार्पेट	फिटिङ सहित	वर्ग फिट	९०
२९	कार्पेट	क्यालियो	वर्ग फिट	१४०
३०	पर्दा	फिटिङ सहित साधारण	मिटर	१,५००
३१	पर्दा	फिटिङ सहित कटन	मिटर	२,१००
३२	पर्दा	फिटिङ सहित डिलक्स	मिटर	२,४५०
३३	पर्दा	फिटिङ सहित भर्टिकल	वर्ग फिट	३३५
३४	सोफा सेट	५ सिटर क्षमता रेक्जिन जडान गरीएको फिटिङ सहित	सेट	४५,०००
३५	चकटी कुसन	१.५x१.५ वर्ग फिटको	थान	४००
३६	पर्दाको डण्डी	इनामेल कोटेड	मिटर	१००
३७	Flag Stand	5 feet wood's stand	थान	९,०००
३८	Plastic Chair on rent		थान	२३
३९	साइन बोर्ड		पवर्ग फिट	२५०
४०	उजुरी पेटिका	काठको	थान	९५०
४१	सूचना पाटी notice board		वर्ग फिट	५५०
४२	भन्याड	आलुमिनमको नन फोल्डिङ १८ फिट	थान	१३,३५०

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
४३	भन्याड	आलुमिनमको नन फोल्डिङ २४ फिट	थान	२०,३००
४४	भन्याड	आलुमिनमको नन फोल्डिङ ६ फिट	थान	६,०५०
४५	भन्याड	आलुमिनमको फोल्डिङ १२ फिट	थान	१८,०००
४६	भन्याड	आलुमिनमको फोल्डिङ १८ फिट	थान	२५,०००
४७	भन्याड	आलुमिनमको फोल्डिङ २४ फिट	थान	४०,३५०
४८	भन्याड	काठको १२ फिट	थान	१२,०००
४९	भन्याड	आलुमिनम डबल साईड ६ फिट	थान	१४,२००
५०	भन्याड	आलुमिनम डबल साईड ८ फिट	थान	२२,८००
५१	Stand coat hanger	काठको	थान	८,०००
५२	Stand coat hanger	स्टिलको	थान	३,०००
५३	इस्टुल	स्टिलको	थान	१,१००
५४	भाडा राख्ने च्याक	स्टिलको	थान	५,०००
५५	Visitor bench	3 seater, metallic	सेट	१६,०००
५६	फुट स्टेप(Foot Step)	फलामको double step	थान	३,२००
५७	पर्दा सपोर्ट		थान	६०
५८	ग्रिप पेच		थान	३
५९	फलामको बेड	सिंगल बेड	थान	७,०००
६०	Mattress	Single bed	थान	६,५००
६१	Mattress	Double bed	थान	१८,०००
६२	काठको पलङ	सिंगल बेड	थान	२८,०००
६३	काठको पलङ	डबल बेड	थान	४२,०००
६४	लो बेड	सिंगल बेड	थान	६,५००
६५	लो बेड	डबल बेड	थान	७,८००
६६	टेबुल सिसा	8 mm	वर्ग फिट	५००
६७	Convex Mirror (traffic)	18 Inch diameter, with installation	थान	६,५००
६८	Convex Mirror (traffic)	24 Inch diameter, with installation	थान	९,५००
६९	Convex Mirror (traffic)	32 inch diameter, with installation	थान	११,५००
७०	Rubber Speed Breaker / Bump	Body type: Rubber ; Resistance- High Impact resistance ;Approx. size : L500 mm xW350 mm xH50 mm; color : Yellow, Black ; Features - in 1 meter length, cat eyes (on both side)	मिटर	५,३५०
७१	Embossed (raised) Metal	silver or Golden colour lettering (Measured inch-word horizontally)	इन्च	४५०
७२	Embossed (raised)	2mm thick vinyl acrylic (Measured circular diameter inch)	इन्च	२८५
७३	प्लाष्टिकको कुर्चि		थान	१,०५०
७४	कण्डम बक्स	काठको	थान	९५०

विद्युतीय सामग्री

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१	AC/DC Digital Clamp Meter	Data Hold Display :6000 counts LCD with double color backlight AC Current:4A/40A/400A/600A AC Voltage:4V/40V/400V/600V DC Voltage:400mV/4V/40V/400V/600V Resistance: 400Ω/4kΩ/40kΩ/400kΩ/4MΩ/40MΩ Capacitance:4nf/40nf/400nf/4μF/40μF/400μF/4mf Non-contact voltage detection, Diode test Data Hold Auto power off With backlight function With flash light function With lower battery indication function	थान	७,२००
२	Battery	AA	जोर	५०

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
३	Battery	AAA	जोर	१५०
४	Tester	Voltage: AC 100-500V; approx Size: 131 x 15mm /5.16 x 0.6 Inch(L*D)	थान	१२०
५	पावर सकेट	बक्स सहित १६ एम्पयर	थान	१,५००
६	पेचक्रस	सेट, 31 in 1 magnetic multifunction standard screw driver set	सेट	६००
७	होल्डर	Bulb Holder B22 to E27 pin to Screw	थान	८०
८	फ्रिजको ग्याँस फेरको		थान	२,०००
९	ए सी को ग्याँस फेरको	up to 1.5 ton	थान	५,०००
१०	ए सी को ग्याँस फेरको	2 ton	थान	६,०००
११	Tea Electric Kettle	stainless steel Electric kettle	थान	८००
१२	केबल टाई	100 pcs/packet 2.5mm*150mm self-Locking Nylon wire Cable Zip Ties Cable Ties	थान	२५०
१३	क्लयाम्पर	3 in 1 Heavy duty crimping tool and stripper	थान	७३०
१४	Flash/Torch Light	Rechargeable Led Flash/torch Light	थान	१,४००
१५	Plier	High Leverage Plier	थान	५८०
१६	Multimeter	Multimeter Voltage, Current, Resistance Tester Buzzer Led Backlight With Non Contact Buzzer	थान	१,५००
१७	Lux Meter	Measure in lux or foot-candles, with one button to switch between display options Measuring range up to 200,000 Lux or 20,000 foot candles Data hold to freeze reading on the digital display Min/max ability to show high and low readings Auto power off to save battery life Includes protective sensor cap	थान	४,८५०
१८	Contactor	Heavy duty power contactor with silver alloy contacts - Volts 220 AC - 3 Pole - Copper coil heavy duty Contactor with silver alloy Wire Connector (32 Amps 3pole) 32 Amps 3pole	थान	४,२००
१९	Programable Timer Switch for Street Light Parking lights Glow Sign Boards	Digital Programable Timer switch provides user to set single ON - OFF time between 24 Hrs User friendly Keypad & LED display helps user to set ON OFF & Real timings from 00.00 to 23.59 Hrs. Timer works on single phase supply voltage 190VAc to 250VAc Timer is suitable for Output load capacity upto 32 Amps Auto/Manual mode operations available mainly usefull for street lights, parking lights, led glow sign boards, water motors & many more	थान	५,५००
२०	Street Light Timer Astronomical	Big LCD Display with backlight shows Date, Time, On Time, Off Time Simple and Easy To Understand Intuitive Keys on the font panel Basement Mode enables user to advance On Time and prolong Off Time by 15 Min. This mode is specifically designed to address challenges of Low Light Areas like Starcases, Basement Parking etc Most Suitable for Street Lights, Staircase/ Parking Lights On-Off, Hoarding Lights On-Off, Water Pump/ Sprinkler On-Off, load capacity upto 32 Ams	थान	९,५००
२१	25 sq mm 3 core ABC Cable	3 core, 25 sq mm	र.मि.	१५०
२२	Street light arms/stand, minimum 0.7 mtr long		set	७००
२३	Installation of street light		set	६००
२४	Day night sensor for auto on-off for street light and other light		Nos	९२५
२५	Bed switch		Nos	३०
२६	Bulb cover umbrella		Pcs	४५०
२७	16 amp contractor 3/4p		Nos	१,२००
२८	Safety gloves		pair	६००
२९	Pendent holder screw type		nos	३५
३०	Pendent holder pin type		nos	३५

३१	Metal body street light bulb cover		nos	९५०
३२	Plastic body street light bulb cover		nos	७५०
३३	Light number plate		nos	५५
३४	22-30 watt printed circuit board (PCB) Osram, Philips or equivalent		set	७५०
३५	40-50 watt printed circuit board (PCB) Osram, Philips or equivalent		set	१,३५०
३६	100-120 watt printed circuit board (PCB) Osram, Philips or equivalent		set	१,६००
३७	20-30 watt high quality LED powered driver		set	१,०८०
३८	40-50 watt high quality LED powered driver		set	१,३५०
३९	100-120 watt high quality LED powered driver		set	१,५८०
४०	Installation of street light (with minimal maintenance)		set	१,५००
४१	electric wire	1 sq mm	roll	२,८५०
४२	electric wire	1.5 sq mm	roll	४,२१०
४३	electric wire	2.5 sq mm	roll	७,०००
४४	electric wire	4 sq mm	roll	१०,२४०

हार्डवेयर सम्बन्धी मालसामान

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१	अन्तराप	६ ईञ्च	थान	७००
२	अन्तराप	८ ईञ्च	थान	१,०००
३	अन्तराप	१२ ईञ्च	थान	१,४००
४	हतौडा	बिड सहित ५०० ग्रामको	थान	१,३००
५	हतौडा	हेभि बिड सहित एक केजीको	थान	२,०००
६	पेच कस (Screw Driver)	मार्डनस प्लस भएको ८ ईञ्चको	थान	५००
७	पेन्चिस /पिलास(Pliers)	६ ईञ्च	थान	९५०
८	पेन्चिस /पिलास(Pliers)	८ ईञ्च	थान	१,२५०
९	ड्रिल मेसिन	१० एम एम	थान	८,५००
१०	ड्रिल मेसिन	१३ एम एम	थान	१२,५००
११	पाईप	नाइलन १ इन्चको	रोल	३,०००
१२	एडजस्टेबल रेन्च (Wrench)	सानो ८"/ २०० एम एम	थान	८००
१३	ब्लेड	ढलान काट्ने	थान	१,५००
१४	ब्लेड	घाँस काट्ने (१ सेट बराबर २ पिस)	थान	३,०००
१५	पञ्जा	छालाको बाक्लो	जोडी	८००
१६	डोरी	पिड	रोल	८,५००
१७	डोरी	नाइलन	के.जी.	५२५
१८	डोरी	जुटको	के.जी.	९५०
१९	डोरी	प्लास्टिकको	मुठा	१५०
२०	पानी ट्याङ्की	हिलटेक वा सो सरह	लिट्र	१४
२१	तारपिन तेल		लिट्र	३००
२२	गार्डेन पाईप १/२"	Flexible pipe, 0.5" dia	रोल	७००
२३	Bleaching Powder		केजी	१५५
२४	Bleaching liquid		लिट्र	१६०
२५	Bleaching powder	ड्रम वाला	के.जी.	१९५
२६	फिटकिरी		के.जी.	१२५
२७	Water pack System		के.जी.	२८५
२८	टि.टि.सी.ए.	१० प्रतिशत	के.जी.	९१०
२९	पोलि एल्मुनियम क्लाराईड		लिट्र	१७५
३०	पि.एन. १० पाइप		मिटर	१५५
३१	चेन स मेसिनको ब्लेड	१८ इन्च माकिता वा सो सरह	थान	६,३००
३२	चेन स मेसिनको ब्लेड	२२ इन्च माकिता वा सो सरह	थान	७,८००
३३	चेन स मेसिनको ब्लेड	२४ इन्च माकिता वा सो सरह	थान	८,७००
३४	कमोट स्पे सेट	स्टिल	सेट	१,५००

खेलकुद सम्बन्धी सामग्री

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१	भलिबल नेट	Standard Size	थान	३,०००
२	भलिबल	५ नं.	थान	३,०००
३	भलिबल पोल		थान	६,४००
४	भलिबल म्याट		थान	४,५५०
५	फुटबल	५ नं.	थान	३,५००
६	ब्याटमिन्टन न्याकेट	भेनस वा सरह	थान	४,०००
७	ब्याटमिन्टन जाली	भेनस वा सो सरह	थान	३,५००
८	ब्याटमिन्टन कक	भेनस वा सो सरह	थान	१००
९	ब्याटमिन्टन पोल		थान	३,६००
१०	T-Shirt Print सहितको	साधारण	थान	३९५
११	T-Shirt Print सहितको	collar	थान	८५५
१२	चेस	गोटी सहित	थान	८२०
१३	चेस	गोटी मात्र	थान	१७०
१४	क्रिकेट बल		थान	५६५
१५	लुडो		थान	५७०
१६	क्यारमबोर्ड गोटी		थान	३७०
१७	Skipping Rope(स्किपिङ रोप)		थान	२६०
१८	क्रिकेट ब्याट		थान	१,२६५
१९	क्रिकेट स्टम्प		थान	३,६००
२०	क्रिकेट हेलमेट		थान	२,३५०
२१	क्रिकेट ग्लोव्स		थान	२,५००
२२	क्रिकेट प्याड		थान	३,८५५
२३	क्रिकेट गार्ड		थान	४९०
२४	आर्म प्याड		थान	१,२९०
२५	क्यारम बोर्ड	४*४ वर्ग फिटको	थान	४,४००
२६	क्यारमबोर्ड पाउडर		के जी	७०
२७	टेबल टेनिस बल		थान	४०
२८	टेबल टेनिस ब्याट		थान	१,४००
२९	टेबल टेनिस बोर्ड सेट	करिब ९*५ वर्ग फिट	थान	४३,०००
३०	टेबल टेनिस नेट		थान	२,६००
३१	कराते म्याट		थान	३,९५५
३२	फुटबल बुट		थान	३,५२०
३३	जर्सी	का.म.पा.को नाम र लोगो प्रिन्ट सहित	थान	३,८४५
३४	फुटबल मोजा		थान	११०
३५	खेलकुद क्याप	का.म.पा.को नाम र लोगो प्रिन्ट सहित	थान	६५५
३६	सिटी	डोरी सहित	थान	२८०
३७	फुटबल कोन		थान	२,४५०
३८	फुटबल नेट		थान	३,५६०
३९	बास्केट बल		थान	३,०५५
४०	बास्केट बल नेट		थान	६५०
४१	किप्पर ग्लोभ्स		जोर	१,१२०
४२	फस्ट एड बक्स		थान	६,६००
४३	बक्सिङ ग्लोभ्स		जोर	३,४५५
४४	योगा म्याट	२*६ वर्ग फिटको	थान	१,२००
४५	योगा म्याट	४*६ वर्ग फिटको	थान	२,१००
४६	ट्रयाक सुट	का.म.पा. को नाम र लोगो प्रिन्ट भएको	थान	३०००

सूचना प्रविधि सम्बन्धी सामग्री

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१	5 Port Network Gigabyte Switch	Port: Min. 5x10/100/1000Mbps Rj 45 Interface or better; metal chasis, Warranty: 1 year warranty or more.	थान	३,५००
२	4 port PoE switch with SFP Uplink	Port: Min. 4x10/100/1000Mbps PoE Rj 45 Interface and 2x Gig SFP Interface; Budget Power: 60 w min; Warranty: 1 year warranty or more.	थान	८,०००
३	4 port PoE switch with SFP/Rj45 Uplink	Port: Min. 4x10/100/1000Mbps PoE Rj 45 Interface and (2 x RJ45 Uplink) or (1 x SFP, 1x Rj45 Uplink) Interface; Budget Power: 60 w min; Warranty: 1 year warranty or more.	थान	८,०००
४	8 Port PoE Switch with Gigabit Uplink	Port: Min 8x 10/100/1000Mbps PoE Rj45 Interface and 2-port Gig RJ45 Interface, Budget Power: 90W min; Warranty: 1 year or more	थान	७,६००
५	8 Port PoE Switch with SFP & Ethernet	Port: Min 8x 10/100/1000Mbps PoE Rj45 Interface and 2-port Gig RJ45 + 2-port Gig SFP Interface, Budget Power: 110W min; Warranty: 1 year or more	थान	१३,५००
६	16 Port PoE Switch with SFP & Ethernet Uplink	Port: Min 16x 10/100/1000Mbps PoE Rj45 Interface and 2-port Gig RJ45 + 2-port Gig SFP Interface, Budget Power: 185W min; Warranty: 1 year or more	थान	२५,०००
७	24 Port PoE Switch with SFP & Ethernet Uplink	Port: Min 24x 10/100/1000Mbps PoE Rj45 Interface and 2-port Gig RJ45 + 2-port Gig SFP Interface, Budget Power: 285W min; Warranty: 1 year or more	थान	३१,५००
८	8 port gigabyte managed switch with PoE	Ports: At least 8x10/100/1000Mbps PoE RJ 45 Interface; 2x Gig SFP interface and 1x Console port or better, L3 Lite Managed via CLI and GUI(Web), Telnet, SSH, MAC: 8K, PoE power budget: 140W or more ;Warranty: 1 year warranty or more.	थान	३३,०००
९	24 port gigabyte managed switch with PoE	Ports: At least 24x10/100/1000Mbps PoE RJ 45 Interface; 4x Gig SFP, RJ45 combo interface and 1x Console port or better, L3 Lite Managed via CLI and GUI(Web), Telnet, SSH, MAC: 8K, PoE power budget: 370W or more; Warranty: 1 year warranty or more.	थान	७५,५००
१०	48 port gigabyte managed switch with PoE	Ports: At least 48x10/100/1000Mbps PoE RJ 45 Interface; 4 x Gig SFP interface and 1x Console port or better, L3 Lite Managed via CLI and GUI(Web), Telnet, SSH, MAC: 8K, PoE power budget: 740W or more; Warranty: 1 year warranty or more.	थान	१६२,०००
११	8 Port Network Gigabyte switch	Ports: At least 8x10/100/1000Mbps Rj 45 Interface or better.; metal chasis, Warranty: 1 year warranty or more.	थान	४,५००
१२	16 Port Network Gigabyte Switch	Ports: Min 16x10/1000Mbps Rj 45 Interface or better.; metal chasis, Warranty: 1 year warranty or more.	थान	१४,२००
१३	24 Port Network Gigabyte Switch	Ports: Min 24x10/1000Mbps Rj 45 Interface or better.; metal chasis, Warranty: 1 year warranty or more.	थान	१८,०००
१४	8 port gigabyte manageable switch with 2 SFP uplink	Ports: At least 8x10/100/1000Mbps RJ45 Interface and 2x1G SFP Ports; 1x Console port or better, L3 Lite Managed via CLI and GUI(Web), Telnet, SSH, MAC: 8K, or more; Warranty: 1 year warranty or more.	थान	२२,२५०
१५	24 port managable switch	Ports: At least 24x10/100/1000Mbps RJ45 Interface and 2x1G SFP Ports or more; 1x Console port or better, L3 Lite Managed via CLI and GUI(Web), Telnet, SSH, MAC: 8K, or more; Warranty: 1 year warranty or more.	थान	३७,२००
१६	8 Port 10G SFP+ Switch	Ports: At least 8x10G SFP+ Interface and 2x1G RJ45 Interface or better; 1x Console port or better, L3 Lite Managed via CLI and GUI(Web), Telnet, SSH, MAC: 32K, or more; Warranty: 1 year warranty or more.	थान	५७,५००
१७	8 Port 1G SFP Unmanaged Switch	Ports: At least 8x 1G SFP Interface and 2x1G Rj45 Interface or better; unmanaged; Mac: 8K, Warranty: 1 year warranty or more.	थान	३१,०००
१८	8 Port 1G SFP Managed Switch	Ports: At least 4x 1G SFP Interface, 4 x 1G SFP and Rj45 combo port and 4x10G SFP Interface or better; 1x Console port or better, L3 stackable lite Managed via CLI and GUI(Web), Telnet, SSH, MAC: 12K, or more; Warranty: 1 year warranty or more.	थान	५७,५००

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१९	24 port SFP Managed Switch	Ports: At least 16x 1G SFP Interface, 8 x 1G SFP and RJ45 combo port and 4x10G SFP Interface or better; 1x Console port or better, L3 stackable Lite Managed via CLI and GUI(Web), Telnet, SSH, MAC: 12K, or more; dual power supply, Warranty: 1 year warranty or more.	थान	९५,५७५
२०	Wireless Access Point (Basic)	Radio Bands: Dual band (2.4GHz and 5GHz); Ethernet Interface: 1x1G Ethernet Interface Wireless Throughput: 1 Gbps wireless throughput; Concurrent Wireless Users: Atleast Supports upto 128 concurrent wireless users; PoE or DC power operation; Warranty: 1 year warranty or more.	थान	१७,५००
२१	Wireless Access Point (Intermediate)	Radio Bands: Dual band (2.4GHz and 5GHz); Ethernet Interface: 1x1G Ethernet Interface (PoE) or more, Wireless Throughput: 1700 Mbps wireless throughput or higher; IEEE Standard: 802.11 a/b/g/n/ac/wave2/ax (wifi6) Concurrent Wireless Users: upto 128, PoE or DC power operation, Warranty: 1 year warranty or more.	थान	२०,०००
२२	Wireless Access Point (Highend)	Radio Bands: Dual band (2.4GHz and 5GHz); Ethernet Interface: 1x2.5G Ethernet Interface (PoE) or more, Wireless Throughput: 2900 Mbps wireless throughput or higher; IEEE Standard: 802.11 a/b/g/n/ac/wave2/ax (wifi6) Concurrent Wireless Users: upto 250, PoE or DC power operation, Warranty: 1 year warranty or more.	थान	२७,०००
२३	Access Point POE Injector	Supports 802.3af and 802.3at standards. Compliant injector with a 10/100/1000 Mbps or higher data rate. PoE injector should provide power connection for wireless access point.	थान	२,५००
२४	Router	WAN Interfaces: 2x1G RJ45 WAN Interface and 1x1G SFP WAN Interface or more; LAN Interfaces: 4x1G LAN Interface or more; WAN Bandwidth: Support 750 Mbps WAN bandwidth or more; Load Balancing and Failover: Support load balancing and failover between multiple WAN links; Warranty: 1 year warranty or more.	थान	१६,५००
२५	Router	Port: 5 x 10/100/1000 Mbps RJ45 Ethernet ports and 1 x 1G SFP port configurable WAN branch router, multiple WAN load balancing, automatic failover, policy-based routing, and link redundancy, dual-core	थान	२२,०००
२६	Router with AP Controller	Port: 1 x Gigabit RJ45/SFP Combo WAN and 8 x Gigabit RJ45 LAN ports flexible WAN connectivity, Supports up to 32 AP licenses for wireless AP management, load balancing, automatic WAN	थान	५०,०००
२७	Outdoor Gigabit PoE Switch	Outdoor Layer 2 Gigabit PoE Switch, Minimum 5 x 10/100/1000 Mbps RJ45 Ports and 2 x 1G SFP Ports, Minimum 4 IEEE 802.3af/at PoE Output Ports, PoE/DC Power Input, PoE Budget 60 W or Higher.	थान	२२,५००
२८	2U Network Rack	Size: 2U, Type: Network Rack, Mounting: 19-inch Standard, Material: Cold Rolled Steel, Wall Mount with front Lockable Glass door, or better.	थान	४,०००
२९	4U Network Rack	4U Wall Mount Network Rack, 550 x 450 mm or equivalent, 19-inch standard, IP20, IK08 or better, CRCA/SPCC steel with powder-coated finish, lockable glass front door, 4 mounting rails or better.	थान	६,५००
३०	6U Network Rack	6U Wall Mount Network Rack, 600 x 400 mm or equivalent, 19-inch standard, IP20, IK08 or better, CRCA/SPCC steel with powder-coated finish, lockable glass front door, 4 mounting rails or better.	थान	८,५००
३१	9U Rack	9U Wall Mount Network Rack, 600 x 400 mm or equivalent, 19-inch standard, IP20, IK08 or better, CRCA/SPCC steel with powder-coated finish, lockable glass front door, 4 mounting rails, single cooling fan or better.	थान	१४,५००
३२	12U Rack	12U Wall Mount Network Rack, 600 x 400 mm or equivalent, 19-inch standard, IP20, IK08 or better, CRCA/SPCC steel with powder-coated finish, lockable glass front door, 4 mounting rails, single cooling fan or better.	थान	१८,०००
३३	15U Rack	15U Wall Mount Network Rack, 600 x 400 mm or equivalent, 19-inch standard, IP20, IK08 or better, CRCA/SPCC steel with powder-coated finish, lockable glass front door, 4 mounting rails, single cooling fan or better.	थान	२२,०००

२०८०/०८/०८
विशाल प्रशिक्षण
प्रशासन विभाग

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
३४	27U Network Rack	27U Floor Standing Network Rack, 600 × 800 mm or equivalent, 19-inch standard, IP20, IK08 or better, CRCA/SPCC steel with powder-coated finish, 4 mounting rails, front and rear ventilated mesh doors, double cooling fans, castor wheels, minimum 1000 kg load capacity or better.	थान	७५,२५०
३५	42U Network Rack	42U Floor Standing Server Rack, 600 × 1000 mm or equivalent, 19-inch standard, IP20, IK08 or better, CRCA/SPCC steel with powder-coated finish, 4 mounting rails, front and rear ventilated mesh doors, double cooling fans, castor wheels, minimum 1200 kg load capacity, UL 2416 or equivalent, or better.	थान	१३०,०००
३६	24 port patch panel	19-inch, 1U rack-mount Cat6 patch panel, pre-loaded with 24 Cat6 keystone jacks or better, compliant with ANSI/TIA-568.2-D (or ANSI/EIA/TIA-568-B.2-1) and ISO/IEC 11801 standards, suitable for Cat6 structured cabling, with port numbering, cable management, complete mounting accessories, and minimum 1-year warranty.	थान	५,५००
३७	Cable Manager	19-inch, 1U rack-mount horizontal cable manager for Cat6/Cat6A network cables, steel or durable ABS construction with cable routing slots or cover, complete mounting accessories, and minimum 1-year warranty.	थान	१,२००
३८	Single Ethernet Faceplate with keystone jack	Single Faceplate with 1xRJ 45 Keystone Jack and 3x3 PVC box or better	थान	४५०
३९	Double Faceplate with keystone jack	Double Faceplate with 1xRJ 45, 1x RJ11 Keystone Jack and 3x3 PVC box or better	थान	६००
४०	RJ-11 jack(100 pcs=1box)	RJ11 Jack for Analog Telephony connection	थान	३५०
४१	RJ-45 jack(100 pcs=1box)	RJ45 Jack for Data connection	थान	५५०
४२	PDU extension	The PDU should have Metal body 2U, 6 way, 13A universal power ports and Rackmountable, Warranty 1 year or better	थान	४,५००
४३	PDU extension	The PDU should have Metal body, 8 way, 13A universal power ports and zero U, Warranty 1 year or better	थान	५,५००
४४	PDU extension	The PDU should have Metal body, 10 way, 13A universal power ports and zero U, Warranty 1 year or better	थान	७,५००
४५	Reverse PDU extension (for Server Rack)	The PDU vertical mounted 12 Shocket C13 type and 4 Shocket C19 type 32A reverse power ports, Warranty 1 year or better	थान	२३,०००
४६	CAT-6 Cable CCA (Indoor/Outdoor)	Cat6 UTP; solid beared Copper min 20%; HDPE (High-Density Polyethylene) insulation, 0.50±0.01 mm, 24 AWG, 305 meter roll	रोल	१२,५००
४७	Cat6 copper cable (Indoor)	Type: UTP CAT-6; Conductor: 24AWG Pure copper (Ø 0.53–0.58 mm); Insulation: PVC or better; 250 Mhz frequency, Compliant with ISO/IEC 11801 or equivalent standards, minimum 305 meter roll	रोल	२४,०००
४८	Cat6 copper cable (outdoors)	Type: UTP CAT-6; Conductor: 24 AWG Pure copper (Ø 0.53 mm ± 0.02); Insulation: HDPE with inner sheath and outer sheath or better; 250 Mhz frequency, Compliant with ISO/IEC 11801 or equivalent Certification, minimum 305 meter roll	रोल	२६,०००
४९	2 Core Drop wire (30M)	2 Core Drop wire Pre-terminated with suitable fiber port with support with length of 30 meter	रोल	५२०
५०	2 Core Drop wire (50M)	2 Core Drop wire Pre-terminated with suitable fiber port with support with length of 50 meter	रोल	७००
५१	2 Core Drop wire (100M)	2 Core Drop wire Pre-terminated with suitable fiber port with support with length of 100 meter	रोल	१,३००
५२	2 Core Drop wire (150M)	2 Core Drop wire Pre-terminated with suitable fiber port with support with length of 150 meter	रोल	१,८५०
५३	2 Core Drop wire (200M)	2 Core Drop wire Pre-terminated with suitable fiber port with support with length of 200 meter	रोल	२,२००
५४	2 Core Drop wire (300M)	2 Core Drop wire Pre-terminated with suitable fiber port with support with length of 300 meter	रोल	३,५००
५५	6 Core Optical fiber cable with messenger	6 Core Optical fiber cable with messenger 10/12 rod (with laying charge)	मिटर	७५
५६	6 Core Optical fiber cable	6 Core Optical fiber cable (with laying charge)	मिटर	४५
५७	12 Core Optical fiber cable with messenger	12 Core Optical fiber cable with messenger 10/12 rod (with laying charge)	मिटर	१००
५८	12 Core Optical fiber cable	12 Core Optical fiber cable (with laying charge)	मिटर	६०

विमानिय प्रमुख
न्यासन विमान

क्र.स.	मालसामानको विवरण	स्पेसिफिकेशन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
५९	Optical fiber tiffin box	Heavy-duty indoor/outdoor fiber splice enclosure with minimum 6-core splice capacity, UV-resistant ABS/engineering plastic body, dust and moisture resistant (IP65 or better), cable entry/exit ports, integrated splice tray, wall-mount support, complete mounting accessories	थान	५५०
६०	Media Converter	Product Type: Gigabit Fiber to Ethernet Convertor	थान	५,०००
६१	SFP Module singlemode	Product Type: Gigabit Single mode SFP Module	थान	४,०००
६२	SFP Module Multimode	Product Type: Gigabit multimode SFP Module	थान	५,२००
६३	SFP to RJ-45 Converter	Product Type: Gigabit SFP for Ethernet Connection	थान	२,७००
६४	2 Core Fiber Termination Box	Loaded with SC adapters & pigtails	थान	१,५००
६५	Patch Panel ODF 12 Core	Maximum Capacity- Up to 12 Core ,Product Type- Rack Mount Fiber Patch Panel ODF (loaded)	थान	७,०००
६६	Patch Panel ODF 24 Core	Maximum Capacity- Up to 24 Core ,Product Type- Rack Mount Fiber Patch Panel ODF (loaded)	थान	१०,०००
६७	Fiber Patch Cord (1 Meter)	Product Type: 1 meter fiber Patch with SC-SC or SC-LC or LC-LC connector or better	थान	२३०
६८	Fiber Patch Cord (3 Meter)	Product Type: 3 meter fiber Patch with SC-SC or SC-LC or LC-LC connector or better	थान	३८०
६९	Fiber Patch Cord (5 Meter)	Product Type: 5 meter fiber Patch with SC-SC or SC-LC or LC-LC connector or better	थान	४८५
७०	Fiber Patch Cord (10 Meter)	Product Type: 10 meter fiber Patch with SC-SC or SC-LC or LC-LC connector or better	थान	७५०
७१	Cat6 Patch Cord (3 Meter)	3-meter factory-manufactured copper CAT6 patch cord 23AWG with RJ45 connectors.	थान	३५०
७२	Cat6 Patch Cord (1 Meter)	1-meter factory-manufactured copper CAT6 patch cord 23AWG with RJ45 connectors.	थान	२३०
७३	Cat6 Patch Cord (0.5 Meter)	0.5-meter factory-manufactured copper CAT6 patch cord with RJ45 connectors.	थान	१९०
७४	Type C to LAN adapter	Product Type: Type C to Gigabit Ethernet Convertor	थान	२,०००
७५	USB to LAN adapter	Product Type: USB to Ethernet Convertor	थान	१,२००
७६	6 in1 USB-C To 3*USB 3.0 A+HDMI+RJ45+PD Converter	Product Type: 6 in1 USB-C To 3*USB 3.0 A+HDMI+RJ45+PD Converter	थान	७,०००
७७	4-Port USB 3.0 Hub + Powered by Micro USB, Metal Plated Shell, Ultra Slim	Product Type: 4-Port USB 3.0 Hub + Powered by Micro USB, Metal Plated Shell, Ultra Slim	थान	२,७००
७८	Wireless HDMI Transmitter and Receiver	5 GHz wireless HDMI extender supporting Full HD resolution up to 1920 × 1080 at 60 Hz, HDMI 1.4 or better, HDCP 1.4, wireless transmission distance up to 50 meters, plug-and-play operation, transmission of high-quality video and audio, HDMI input/output, USB-C power supply, compatible with laptops, PCs, projectors, monitors and TVs, including required cables and accessories, with 1-year warranty or more.	थान	२०,०००
७९	HDMI Cable 3 mtr	3 Meters, HDMI Cable 4k high speed for all HDMI Devices, Laptop, competer, UHD TV, Monitor, Projector	थान	१,०००
८०	HDMI Cable 5 mtr	5 Meters, HDMI Cable 4k high speed for all HDMI Devices, Laptop, competer, UHD TV, Monitor, Projector	थान	१,४००
८१	HDMI Cable 10 mtr	10 Meter HDMI Cable 4k high speed for all HDMI Devices, Laptop, competer, UHD TV, Monitor, Projector	थान	२,०००
८२	HDMI Cable 15 mtr	15 Meter HDMI Cable 4k high speed for all HDMI Devices, Laptop, competer, UHD TV, Monitor, Projector	थान	२,४००
८३	1.5mm Multistrand flexible Cable	1.5mm Multistrand flexible wire dual coated coil 90Meter Roll	रोल	४,९१०
८४	2.5mm Multistrand flexible Cable	2.5mm Multistrand flexible wire dual coated coil 90Meter Roll	रोल	८,१८०
८५	2.5mm FRLS Cable	2.5mm FRLS cable 90Meter Roll	रोल	९,५१५
८६	6 mm power cable	6mm(0/1) Concentric Power cable (outdoor), single core	मिटर	६०
८७	10 mm power cable	10 mm Concentric power cable (outdoor), single core	मिटर	८०
८८	6 Sq mm Pure Copper Cable (4 Core)	Conductor Size: 6 sq.mm, 4 Core Conductor: Pure Copper, Insulation: PVC, PVC/XLPE insulated and PVC sheathed, rated for 0.6/1.0 kV or higher, suitable for indoor/outdoor electrical power distribution. IEC/IS/BS or equivalent international standards.	मिटर	१,०५०
८९	Power socket with PVC box(3X3)	10A power socket with 3x3 PVC box or better	थान	४००

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
९०	Double power socket with PVC box (3*5)	2x10A power socket with 3x5 PVC box or better	थान	६००
९१	DB Box (Input & Output)	Input and output Breaker, voltage protection	थान	३५,०००
९२	3 port Multiplug	3 port Multiplug or better	थान	५७५
९३	5 port Multiplug	5 port Multiplug or better	थान	८७०
९४	Metal Grip 2"	Metal Grip 2"	के जि	६००
९५	PVC Black pipe(3/4")	PVC Black pipe(3/4")	मिटर	२५
९६	Flexible Pipe 1 "	Flexible Pipe 1 "	मिटर	५०
९७	Flexible Pipe 2 "	Flexible Pipe 2 "	मिटर	८०
९८	Listic 25mm	Listic 25mm	थान	७५
९९	Listic 30 mm	Listic 30 mm	थान	९५
१००	Listic 40mm	Listic 40mm	थान	१४५
१०१	Listic 70mm	Listic 70mm	थान	२००
१०२	Listic Killa	Listic Killa	थान	१
१०३	Grip 1.5"	Grip 1.5"	के जि	५००
१०४	Full Threaded Black Screw 0.5"	Full Threaded Black Screw 0.5"	के जि	५००
१०५	Full Threaded Black Screw 1"	Full Threaded Black Screw 1"	के जि	५००
१०६	Full Threaded Black Screw 1.5"	Full Threaded Black Screw 1.5"	के जि	५००
१०७	Black Tape	Black Tape	थान	२५
१०८	Cable tie 150MM	Cable tie 150MM	प्याकेट	१७५
१०९	Cable tie 300MM	Cable tie 300MM	प्याकेट	२६५
११०	Binding wire	Binding wire	के जि	१२०
१११	Fiber Splicing	Fiber Splicing, testing and fiber cable management per splicing (per core)	थान	४५०
११२	Networking / Wiring (without bit wiring)	Laying of Cat 6 Cable, Power Cable, Optical Fiber, testing and tagging per meter. (without bit wiring)	मिटर	१०
११३	Networking /Wiring (with bit wiring)	Network cable -CAT 6/Power Cable/Optical Fiber laying in PVC duct, Pipe, crimping, testing and labeling per meter. (with bit wiring including listic)	मिटर	६०
११४	Network Cabling per point	Network cable laying through PVC duct/pipe, routing, termination/crimping, labeling, continuity testing and commissioning per point	थान	१,३५०
११५	Wiring Cabling per point	Wiring and Cable Management (Cable laying, routing, dressing, bundling, fixing, labeling and proper management of network/power/other cables, including testing) Per point	थान	१,३५०
११६	CCTV Camera Installation	Installation of CCTV Camera -Indoor and Outdoor Bullet/Dome/PTZ/Wireless Camera (Camera Mounting, basic bracket installation, Cable termination, POE/Power Connection, IP Configuration, NVR/VMS Connection, Camera angle adjustment, Testing and Commissioning per camera)	थान	२,५००
११७	ANPR CCTV Camera Installation	Installation of ANPR CCTV Camera(Site Survey, Camera Mounting, Network and Power Installation, ANPR Configuration, NVR/VMS/Server Integration, Testing and Commissioning fiber and cable laying per camera)	थान	८,८५०
११८	Projector	DLP, XGA, 1024 x 768 pixels, 3500 Lumens or better	थान	५३,५००
११९	Projector	DLP, WXGA, 1280 x 800 pixels, 4000 Lumens or better	थान	६५,५००
१२०	Projector Screen	120 " diagonal , 4:3 ratio	थान	१२,५००
१२१	External Harddisk (HDD)	2 TB	थान	१५,६२५
१२२	External Harddisk (HDD)	1 TB	थान	११,८७५
१२३	External Harddisk (SSD)	2 TB	थान	३१,८७५
१२४	External Harddisk (SSD)	1 TB	थान	२२,०००
१२५	External Harddisk (SSD)	512 GB	थान	१४,०००
१२६	Internal hard Disk (SSD)	1 TB	थान	७,५००
१२७	Internal hard Disk (SSD)	512 GB	थान	४,४००
१२८	SSD M.2 SATA	1 TB	थान	१५,५००

१८/६७

मुक्तिराम अर्याल
प्रमुख प्रशासकीय अधिकृत

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१६२	32 Inch FHD Smart TV	Size-32 Inch, Android 14, FHD (1366*768) Resolution, Refresh Rate: 60Hz(min), HDMI Input: 2, USB Input: 2, Audio Power: 2*5W, Installation with required accessories, HDMI cable, Remote Control. Min. 1 year warranty.	थान	२५,०००
१६३	24 Inch FHD Monitor	23.8-inch Full HD LED Monitor, 1920 × 1080 resolution or higher, IPS panel, LED backlight, 16:9 aspect ratio, minimum 90 Hz refresh rate, 7 ms response time or better, 178° wide viewing angle, brightness of at least 250 cd/m², contrast ratio of at least 1000:1, HDMI, DisplayPort and VGA inputs or equivalent, audio output, VESA wall-mount compatible, low power consumption, supplied with necessary cables and accessories, or better. Min. 1 year warranty.	थान	१७,५००
१६४	24 Inch FHD Monitor (High End)	Size: 23.8" Full HD, IPS Panel, Anti-Glare or Higher; Resolution: 1920 × 1080 (Full HD) or Higher; Brightness: ≥ 250 cd/m² or Better; Refresh Rate: 100Hz or Better; Response Time: 5ms or Better; Color Gamut: 99% sRGB; Contrast ratio: 1000 : 1 or Better; Color depth: 8 bit or Higher; Aspect ratio: 16:9 or more; Connectivity: HDMI 1.4 × 1, DP 1.2 × 1, DP Out × 1, USB-C (PD 65 W) × 1, USB-A × 2, 3.5 mm jack or More; Audio: 2x 2W Speaker, Built in Noise Cancellation Mic or Better; Adjustment: Tilt, Swivel / Pivot / Height Adjustment; VESA Mount: 100 x 100 mm or Better; Eyecare: Low Blue Light Technology, Flicker Free, Light Sensor, Color Weakness or More; Mode: Coding Mode, ePaper Mode, Low Blue Light Mode or More; Min. 1 year warranty.	थान	३५,५००
१६५	75" Smart Interactive board	Size -75-inch, Minimum Requirements- Android 16, Octa-core Processor (A72*4+ A53*4 -1.8 GHz min speed for each core), 8 GB RAM, 128 GB Storage, 4K UHD (3840 × 2160) D- LED Display, 20-Point IR Touch, Anti-Glare Toughened Glass, Built-in Wi-Fi (2.4/5 GHz), Bluetooth 5.3, Wireless Screen Sharing, Built-in Camera (min 13mp), Microphone & Speakers, HDMI/USB/LAN/RS232/Type-C Connectivity, Wall Mount & Accessories Included, CE Certified, Minimum 2-Year Warranty, Complete with Supply, Delivery and Installation.	थान	१९०,०००
१६६	75" Smart Interactive board	Size -75-inch, Minimum Requirements-Android 14 or higher, Octa-core Processor(A55*8 -1.5 GHz min speed for each core), 8 GB RAM, 128 GB Storage, 4K UHD (3840 × 2160) Direct LED Display, 20-Point IR Touch, Anti-Glare Toughened Glass, Built-in Dual-Band Wi-Fi (2.4/5 GHz), Bluetooth & NFC, Wireless Screen Sharing, Built-in Camera, Microphone & Speakers, HDMI/USB/LAN/RS232/Type-C Connectivity, Wall Mount & Accessories Included, CE Certified, Minimum 2-Year Warranty, Complete with Supply, Delivery and Installation.	थान	१७०,०००
१६७	65" Smart Interactive board	Size -65-inch, Minimum Requirements-Android 14 or higher, Octa-core Processor(A55*8 -1.5 GHz min speed for each core), 8 GB RAM, 128 GB Storage, 4K UHD (3840 × 2160) Direct LED Display, 20-Point IR Touch, Anti-Glare Toughened Glass, Built-in Dual-Band Wi-Fi (2.4/5 GHz), Bluetooth & NFC, Wireless Screen Sharing, Built-in Camera, Microphone & Speakers, HDMI/USB/LAN/RS232/Type-C Connectivity, Wall Mount & Accessories Included, CE Certified, Minimum 2-Year Warranty, Complete with Supply, Delivery and Installation.	थान	१३२,०००
१६८	OPS PC Module	OPS PC Module, Windows 10 or higher, Intel Core i5 11th Generation or higher Processor, 8 GB DDR4 RAM, 256 GB SSD Storage, Integrated Graphics, HDMI, DisplayPort, Minimum 3 USB (2.0/3.0) Ports, Gigabit Ethernet (LAN) Port. Warranty-Min. 1 Year.	थान	५५,७५०
१६९	Trolley with Stand (for LED SMART Board)	Smart Board Mobile Trolley Stand, Heavy-Duty Steel Construction, Compatible with 65-86 Inch Interactive Flat Panel Displays, VESA Compatible, Lockable Heavy-Duty Castor Wheels, Adjustable Height, Minimum Load Capacity 100 kg or Higher, Powder-Coated Finish, Complete with Mounting Hardware	थान	१८,०००

विश्वविद्यालय प्रमुख
पत्राचार विभाग

मुक्तिराम अर्याल
प्रमुख प्रशासकीय अधिकृत

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१७०	Trolley Speaker 8 "	Speaker Size 8 Inch, Sound Output: 30W Wireless Mic, Mic Input 1 Year Warranty, 6 Months on Battery	थान	११,५००
१७१	Trolley Speaker 12 "	Speaker Size 12 Inch, Sound Output: 40W Bluetooth, Mic Input, Rechargeable Battery, 2 wireless Mic, USB /TF input function, 1 Year Warranty, 6 Months on Battery	थान	१७,५००
१७२	Branch Firewall Device	Interface- 1*1Gigabit WAN , 3 *1Gigabit LAN RJ45 interface or more, IPV4 Firewall Throughput- 3.9 Gbps or more, Concurrent connections per sec - 400K or more concurrent connections • 34K or more sessions per second, IPsec VPN Throughput- 3.0 Gbps or more, Protocols- • The firewall should support SNMP protocols, static routes and dynamic routing protocols (OSPF, BGP), 1-year warranty on product.	थान	५८,०००
१७३	VGA Cable	1 Meters	थान	२६५
१७४	VGA Cable	5 Meters	थान	६००
१७५	Portable Speaker	For Computer and Laptop, 6W (minimum) total output with 2.0 channel USB plug, Frequency response of 20Hz-20KHz.	थान	१,५००
१७६	Remote	Universal TV remote	थान	५००
१७७	Remote	Universal AC remote	थान	१,२५०
१७८	Power Bank	22.5 W, 10000 MAH capacity or better, battery-Li-polymer, Output- USB, Type C, Fast Charging- yes, Warranty-1 Year	थान	३,५००
१७९	SD Card 8GB	8 GB, Read/Write speed-100/90 mb/s, high/low temperature resistant, water proof, anti-magnetic	थान	९००
१८०	SD Card 16 GB	16 GB, Read/Write speed-100/90 mb/s, high/low temperature resistant, water proof, anti-magnetic	थान	१,३५०
१८१	SD Card 32 GB	32 GB, Read/Write speed-100/90 mb/s, high/low temperature resistant, water proof, anti-magnetic	थान	१,८००
१८२	SD Card 64GB	64 GB, Read Speed: Up to 100 MB/s, Write Speed: Up to 90 MB/s, Speed Class: C10/U3/V30, File System-exFAT, Suitable for CCTV, Warranty-Min. 1 Year	थान	३,०००
१८३	SD Card 128GB	128 GB, Read Speed: Up to 100 MB/s, Write Speed: Up to 90 MB/s, Speed Class: C10/U3/V30, File System-exFAT, Suitable for CCTV, Warranty-Min. 1 Year	थान	४,०००
१८४	64 GB Pendrive	Interface: USB 3.0, transfer speed of up to 100 MB/s, USB Connector Type: Standard, Warranty: 1 year	थान	१,२५०
१८५	32 GB Pendrive	Interface: USB 3.0, transfer speed of up to 100 MB/s, USB Connector Type: Standard, Warranty: 1 year	थान	१,०००
१८६	16 GB Pendrive	Interface: USB 3.0, transfer speed of up to 100 MB/s, USB Connector Type: Standard, Warranty: 1 year	थान	७००
१८७	8 GB Pendrive	Interface: USB 3.0, transfer speed of up to 100 MB/s, USB Connector Type: Standard, Warranty: 1 year	थान	६००
१८८	Telephone Wire	2 pair, 1 Roll (100m)	थान	३,१००
१८९	Telephone Wire	2 Pair, 10 meter	थान	५३५
१९०	Electric Room Heater	Halogen Heater, 3 rod, 1200W	थान	४,५००
१९१	Rj45 LAN Cable Tester	Network Cable Tester RJ45 RJ11 RJ12 Cat5 Utp Lan Cable Tester Networking Tool Led indication	थान	१,३५०
१९२	DSLR Camera Charger	For Canon/Nikon/Sony or similar	थान	३,५००
१९३	Headphone	Type: Closed Back Dynamic Overhead Headphones, noise- cancelling with microphone, long cables, volume controller, Warranty: 1 year or more	थान	५,०००
१९४	Micro Oven	23liter / 24 liter, Type-solo, Touch Key Pad, 1 Year Product Warranty	थान	१८,०००
१९५	2MP Bullet Camera	2 MP Indoor/Outdoor Network Bullet Camera, Full HD (1920 × 1080) at 25/30fps or higher resolution, fixed lens 3.6mm, day/night (ICR), IR illumination, Upto 30m IR, 1/2.8" CMOS, 0.01lux/F2.0 (color), WDR/BLC/HLC image enhancement, H.265/H.264 video compression, PoE support, IP67 weatherproof, ONVIF compliant, or better. Minimum 1- Year Warranty.	थान	५,७००
१९६	2MP Dome Camera	2 MP Indoor/Outdoor Network Dome Camera, Full HD (1920 × 1080) or higher resolution, fixed lens 2.8mm, day/night (ICR), IR illumination, 1/2.8" CMOS, 3D DNR, Upto 30m IR, WDR/BLC/HLC image enhancement, H.265/H.264 video compression, PoE support, IP67-rated, ONVIF compliant, or better Minimum 1-Year Warranty.	थान	५,७००
१९७	4MP Bullet Camera	1/3" CMOS sensor or better, 4MP (2560×1440) resolution or higher, 2.8mm/4mm fixed lens or better, 0.006 Lux @ F1.6 low- light capability, ≥30m illumination with supplemental light, 120dB WDR or better, H.265/H.264 compression or better, 3D DNR, BLC, HLC, up to 25 fps at max resolution, minimum 2 video streams, intrusion and motion detection, microSD support up to 256GB or better, RJ45 (10/100 Mbps), 12V DC/PoE, ≤20W, built-in mic, -10°C to 60°C, IP67 rated, CE/FCC/ROHS certified. Warranty: Minimum 1 year	थान	१०,५००
१९८	4MP Dome Camera	1/3" CMOS sensor or better, 4MP (2560×1440) resolution or higher, 2.8mm/4mm fixed lens or better, 0.006 Lux @ F1.6 low- light capability, ≥30m illumination with supplemental light, 120dB WDR or better, H.265/H.264 compression or better, 3D DNR, BLC, HLC, up to 25 fps at max resolution, minimum 2 video streams, intrusion and motion detection, microSD support up to 256GB or better, RJ45 (10/100 Mbps), 12V DC/PoE, ≤20W, built-in mic, -10°C to 60°C, IP67 rated, CE/FCC/ROHS certified, Warranty: Minimum 1 year	थान	१०,५००

२०८५/०५/२०
श्री ८५/०५/२०
प्रमुख प्रशासकीय अधिकृत

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१९९	4 MP Indoor/Outdoor Full Colour Camera	Type: Outdoor/Indoor; Sensor: $\geq 1/1.8"$ CMOS sensor and F1.0 aperture lens; Resolution: $\geq 2560 \times 1440$; Lens: Indoor 2.8mm, Outdoor < 4.0 mm; Illumination: ≤ 0.0001 lux @F1.0; IR/White/Warm light; ≥ 50 m range; auto light on/off control; WDR: ≥ 120 dB; Video: H.265/H.265 or higher compression, main stream up to 25fps; Audio: G.711a; Enhancement: HLC, white balance; Interface: RJ45 (10/100) PoE supportable, ONVIF Profile S/G/T; Storage: MicroSD (max 256GB supported or more); built in mic; Protection: IP67; AI: Intrusion, tripwire (vehicle & human); CE or FCC or RoHS; Warranty: Minimum 1 year	थान	१४,५००
२००	6 MP Indoor/Outdoor Full Colour Camera	Type: Outdoor/Indoor; Sensor: $\geq 1/1.8"$ CMOS sensor and F1.0 aperture lens; Resolution: $\geq 2688 \times 1520$; Lens: Indoor 2.8mm, Outdoor < 4.0 mm; Illumination: ≤ 0.0003 lux @F1.0; IR/White/Warm light; ≥ 50 m range; auto light on/off control; WDR: ≥ 120 dB; Video: H.265/H.265 or higher compression, main stream up to 25fps; Audio: G.711a; Enhancement: HLC, white balance; Interface: RJ45 (10/100) PoE supportable, ONVIF Profile S/G/T; Storage: MicroSD (max 256GB supported or more); built in mic; Protection: IP67; AI: Intrusion, tripwire (vehicle & human); CE or FCC or RoHS; Warranty: Minimum 1 year	थान	१८,०००
२०१	8 MP Outdoor Full Color Camera	Type: Outdoor; Sensor: $\geq 1/1.8"$ CMOS sensor and F1.0 aperture lens; Resolution: $\geq 3840 \times 2160$; Lens: 4.0mm or 6mm; Illumination: ≤ 0.0003 lux @F1.0; IR/White/Warm light; ≥ 30 m range; auto light on/off control; WDR: ≥ 120 dB; Video: H.265/H.265 or higher compression, stream up to 25fps; Audio support: G.711a; Enhancement: HLC, BLC, Defog, white balance; Interface: RJ45 (10/100) PoE supportable, ONVIF Profile S/G/T; Storage: MicroSD (max 256GB supported or more); built in mic; Protection: IP67; AI: Intrusion, tripwire (vehicle & human); Face Detection; CE or FCC or RoHS; Warranty: Minimum 1 year	थान	२२,०००
२०२	4MP Motorized Vari Focal Bullet Camera	Type- Outdoor, Image Sensor-1/3" Progressive Scan CMOS or better, Resolution- 4MP (2560 $\times$ 1440) or better, Lens: Motorized Vari-focal 2.8mm to 12mm or better range, Minimum Illumination- 0.003 Lux @ F1.7 or better, Illumination Distance- Up to 30 m IR distance, WDR -120 dB, Video Compression- H.265/H.264 or better, Image Enhancement-3D DNR, BLC, HLC; main Frame Rate- 25 fps or better, Smart Features- Motion detection, Illegal access, video tampering, Storage- MicroSD slot up to 256 GB or better, Network Interface- RJ45 (10/100 Mbps), PoE support, Protection: IP67, Certifications- CE or FCC or RoHS, Warranty: Minimum 1 year	थान	१५,५००
२०३	4MP Motorized Varifocal Color Bullet Camera	Type- Outdoor, Image Sensor-1/1.8" Progressive Scan CMOS or better, Resolution- 4MP ((2688 $\times$ 1520) or better, Lens- Motorized Vari-focal 2.7mm to 12mm or better range, Minimum Illumination- 0.0005 lux @ F1.2 or better, Illumination Distance- Up to 50 m IR distance, WDR -120 dB, Video Compression- H.265/H.264 or better, Image Enhancement-3D DNR, BLC, HLC, Defog; main Frame Rate- 25 fps or better, Smart Features- Motion, human, face detection, vehicle detection. Storage- MicroSD slot up to 256 GB or better, Network Interface- RJ45 (10/100 Mbps), PoE support, two way audio, Built-in Microphone, Protection: IP67. Certifications- CE or FCC or RoHS, Warranty: Minimum 1 year	थान	३५,०००
२०४	PTZ Camera 4MP	Type: Outdoor, Image Sensor: $\geq 1/2.8"$ CMOS; Resolution: $\geq 2560 \times 1440$ or better; Optical Zoom: $\geq 25\times$, Digital zoom $\geq 16\times$; Focal Length: 5 mm to 120 mm, Minimum Illumination- 0.005 Lux @ F1.6 or better; IR: upto 100m, Day/Night: Auto (ICR), WDR: ≥ 120 dB, standard PTZ function; Video compression: H.265/H.264 or better, Enhancement: BLC, HLC, Defog; AI: intrusion, smart tracking; Interoperability: ONVIF Profile S/G/T; Interface: RJ45 10/100M; Audio in/out ≥ 1 each; Storage: ≥ 256 GB; Protection: IP67; certifications: CE or FCC or RoHS; should supply with pole mount bracket and required adaptor if required to operate the camera, Warranty: Minimum 1 year	थान	६५,०००
२०५	4 MP Dual Lens PTZ Camera	Type: Outdoor with fix lens and ptz lens integration for multiple view by supporting dual channel in single IP; For Fix Channel: Image Sensor: $\geq 1/2.8"$ CMOS; Resolution: $\geq 2560 \times 1440$ or better; Focal Length: 4.0 mm, Minimum Illumination- 0.005 Lux @ F1.0 or better; warm light : upto 30m; For PTZ Channel: Image Sensor: $\geq 1/2.8"$ CMOS; Resolution: $\geq 2560 \times 1440$ or better; Optical Zoom: $\geq 25\times$; Focal Length: 5 mm to 120 mm, Minimum Illumination- 0.005 Lux @ F1.6 or better; IR: upto 100m, support standard PTZ function; Day/Night: Auto (ICR), WDR: ≥ 120 dB, Video compression: H.265/H.264 or better, Enhancement: BLC, HLC, Defog; AI: Tampering, intrusion, smart tracking; Interoperability: ONVIF Profile S/G/T; Interface: RJ45 10/100M; Audio in/out ≥ 1 each; Storage: ≥ 256 GB; Protection: IP66, certifications: CE or FCC or RoHS; should supply with pole mount bracket and required adaptor if required to operate the camera, Warranty: Minimum 1 year	थान	८२,०००

०२६/०५/२०
विभागीय प्रमुख
प्रशासन विभाग

मुक्तिराम अर्याल
प्रमुख प्रशासकीय अधिकृत

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
२०६	Automatic Number Plate Recognition(ANPR) CCTV Camera	Sensor: $\geq 1/1.8''$ CMOS, 8MP Resolution: $\geq 3840 \times 2160$, Illumination: $\leq 0.0003 \text{ lux}$ @F1.6 WDR $\geq 140 \text{ dB}$; Lens: 8-32mm, covers ≥ 2 lanes, White light $\geq 30 \text{ m}$, Video compression: H.265/H.264 or better, Enhancement: BLC, HLC, Defog; stream up to 25/30 fps, BLC, HLC, 3D DNR, Defog; Interface: RJ45 (10/100) PoE supportable, Detection: Motor vehicles, motorcycles, plate no recognition, capture vehicle number plate for speed from 0 to 120 km/h; Storage support: Up to 512GB; Network: RJ45, ONVIF S/G/T, Built: IP67, IK10, Pole mount & 3D angle adjustable brackets should be included, certifications: CE or FCC or RoHS; Warranty: Minimum 1 year	थान	९८,०००
२०७	Suppliment Light for ANPR	Warm light LED, Color Temperature: 3000K-7000K; luminous flux: (1400-5000)lm, Optimal illumination distance: 16m-25m, should support auto day & night function, Illuminance coverage: Min 2 lanes, Number of LED: 42(min), Dimming mode should control from RS485 control or manual key control, Power supply VAC: 100 V ~240V, 50/60Hz, Power consumption 3W-60W Adjustable (active power), Life span > 50000 hours or more, protection IP66 or more, Pole mount & 3D angle adjustable brackets should be included. Warranty: Minimum 1 year	थान	७५,०००
२०८	ANPR Arms in existing Pole	Arms suitable for ANPR Camera and light mounting in existing pole of at least 1 mtr to 3 mtr as per requirement of site, having support and proper mounting to bear the required load made by iron metal structure and recommended by camera to get proper field of view and get proper output of camera.	थान	६,०००
२०९	4 Port GPON PoE ONU for Road Project	General Features: Auto-discovery & register, IGMP Snooping, VLAN, loop detection, port speed limit, remote management; Port Interface: Min. 4 $\times$ 10/100/1000 Mbps PoE ports (auto-adapted); 1 $\times$ GPON port (pluggable or fixed); Wavelength (nm): Upstream: $1310 \pm 20 \text{ nm}$, Downstream: $1490 \pm 15 \text{ nm}$; Optical Parameters: Receiving Sensitivity: $\leq -28 \text{ dBm}$, Optical Power: 0.5 to $+5 \text{ dBm}$; Transmission Distance: $\geq 20 \text{ km}$; PoE Support: Min. 4 $\times$ IEEE 802.3af/at-compliant ports; Link budget: $\geq 30 \text{ W}$ per port; Accessories: Power adapter and required accessories included; Compatibility: Fully compatible with Nepal Telecom's OLT; certifications CE or FCC or RoHS; Warranty: Minimum 1 year.	थान	८,७५०
२१०	4 Port Industrial Switch	Industrial grade switch chasis aluminum corrugated rapid heat dissipation Casing design for outdoor environment with temperature range adaptability -40°C -75°C ; Port: 4x Gigabit PoE ports and 2x Gigabit fiber optic ports; packet forwarding rate 8 Mbps or more; bandwidth capacity up to 12 Gbps; 6KV lightning protection or better; CE/FCC/ROHS certified; power budget 30W per port; DIN-rail, IP40, should supplied with industrial grade 120W power adaptor; Warranty: Minimum 1 year.	थान	१४,०००
२११	Out Door Pole Mount Ups	Installation: Pole Mounted; Capacity: 600W; Input: 220VAC, 50/60Hz (auto-sensing); Output: 230VAC $\pm 10\%$, 50/60Hz; Simulated sine wave; Battery: 2 $\times$ 12V Lead-Acid, 9Ah; Temp. Range: 0°C to 50°C ; Interface: Yes (real-time UPS monitoring); Protection: Lightning protection, IP55 waterproof or higher; Size: Minimum 450x500x150 or customizable to fit power adapters of camera and POE switches; Warranty: Minimum 1 year.	थान	६८,०००
२१२	32" Surveillance monitor	32-inch LED Surveillance Monitor, Full HD (1920 $\times$ 1080) or higher resolution, LED backlight display with 16:9 aspect ratio, wide viewing angle, minimum 60 Hz refresh rate, Build-in speaker, Audio 5W $\times$ 2, HDMI and VGA inputs (or equivalent), high brightness and contrast ratio suitable for CCTV monitoring, 24/7 continuous operation, VESA wall-mount compatible, supplied with power cable and necessary accessories, or better. Warranty: Minimum 1 year.	थान	४३,५००
२१३	43" Surveillance monitor HD	43-inch Full HD LED Monitor, 1920 $\times$ 1080 resolution or higher, LED backlight display, 16:9 aspect ratio, minimum 60 Hz refresh rate, wide viewing angle ($\geq 178^{\circ}$), brightness of at least 250 cd/m ² , contrast ratio of at least 1000:1, HDMI and VGA inputs or equivalent, wall-mount compatible, low power consumption, suitable for 24/7 continuous operation, supplied with necessary cables and accessories, or better. Warranty: Minimum 1 year.	थान	४८,५००
२१४	43" Surveillance monitor 4K	Screen size 42.5 inches; resolution 4K UHD (3840 $\times$ 2160) or better; LED backlight; brightness 300 cd/m ² or higher; 8-bit color depth; response time 8 ms or less; refresh rate 60 Hz; input ports include minimum 1 $\times$ HDMI, 1 $\times$ VGA/HDMI, and 1 $\times$ audio-in/out; built-in speakers 2 $\times$ 5W or higher; supplied with necessary cables and accessories, or better. Warranty: Minimum 1 year.	थान	६५,५००
२१५	55" Surveillance monitor	55" 4K LED Monitor, resolution 4K UHD (3840 $\times$ 2160) or better; LED backlight; brightness 300 cd/m ² or higher; 8-bit color depth; response time 8 ms or less; refresh rate 60 Hz; input ports include minimum 1 $\times$ HDMI, 1 $\times$ VGA/HDMI, and 1 $\times$ audio-in/out; built-in speakers 2 $\times$ 5W or higher; supplied with necessary cables and accessories, or better. Warranty: Minimum 1 year.	थान	१०५,०००

विभागीय प्रमुख
प्रमुख प्रशासकीय अधिकृत

सुन्दराम अर्याल
प्रमुख प्रशासकीय अधिकृत

क्र.स.	मालसामानको विवरण	स्पेसिफिकेशन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
२१६	Surveillance Harddrive 2 TB	Capacity: 4 TB, Form Factor: 3.5-inch, Interface: SATA 6 Gb/s, Recording Technology: CMR, Cache: 256 MB, Max Transfer Rate: Up to 180 MB/s or higher, Min. 5400 rpm, Optimized for 24x7 Surveillance, Supports up to 32 Cameras, MTBF: Min. 1 Million Hours, Workload Rating: 180 TB/Year, Compliant-CE or RoHS or ISO, Min-2-Year Warranty viewable in OEM site, Made Year -AD 2025 Onwards(acceptable)	थान	१५,५००
२१७	Surveillance Harddrive 4 TB	Capacity: 4 TB, Form Factor: 3.5-inch, Interface: SATA 6 Gb/s, Recording Technology: CMR, Cache: 256 MB, Max Transfer Rate: Up to 180 MB/s or higher, Min. 5400 rpm, Optimized for 24x7 Surveillance, Supports up to 32 Cameras, MTBF: Min. 1 Million Hours, Workload Rating: 180 TB/Year, Compliant-CE or RoHS or ISO, Min-2-Year Warranty viewable in OEM site, Made Year -AD 2025 Onwards(acceptable)	थान	२७,०००
२१८	Surveillance Harddrive 6 TB	Capacity: 6 TB, Form Factor: 3.5-inch, Interface: SATA 6 Gb/s, Recording Technology: CMR, Cache: 256 MB, Max Transfer Rate: Up to 255 MB/s or higher, Min. 5400 rpm, Optimized for 24x7 Surveillance, Supports up to 64 HD Cameras and 32 AI Streams, MTBF: Min. 1.5 Million Hours, Workload Rating: 180 TB/Year, Compliant-CE or RoHS or ISO, Min-2-Year Warranty viewable in OEM site, Made Year -AD 2025 Onwards(acceptable)	थान	४४,५००
२१९	Surveillance Harddrive 8 TB	Capacity: 8 TB, Form Factor: 3.5-inch, Interface: SATA 6 Gb/s, Recording Technology: CMR, Cache: 256 MB, Max Transfer Rate: Up to 200 MB/s or higher, Min. 7200 rpm, Optimized for 24x7 AI Surveillance, Supports up to 64 HD Cameras and 32 AI Streams, MTBF: Min. 1.5 Million Hours, Workload Rating: 250 TB/Year, Compliant-CE or RoHS or ISO, Min-2-Year Warranty viewable in OEM site, Made Year -AD 2025 Onwards(acceptable)	थान	६२,५००
२२०	Surveillance Harddrive 10 TB	Capacity: 10 TB, Form Factor: 3.5-inch, Interface: SATA 6 Gb/s, Recording Technology: CMR, Cache: 512 MB, Max Transfer Rate: Up to 255 MB/s or higher, Min. 7200 rpm, Optimized for 24x7 AI Surveillance, Supports up to 64 HD Cameras and 32 AI Streams, MTBF: Min. 1.5 Million Hours, Workload Rating: 550 TB/Year, Compliant-CE or RoHS or ISO, Min-2-Year Warranty viewable in OEM site, Made Year -AD 2025 Onwards(acceptable)	थान	८७,०००
२२१	Surveillance Harddrive 16 TB	Capacity: 16 TB, Form Factor: 3.5-inch, Interface: SATA 6 Gb/s, Recording Technology: CMR, Cache: 512 MB, Max Transfer Rate: Up to 255 MB/s or higher, Min. 7200 rpm, Optimized for 24x7 AI Surveillance, Supports up to 64 HD Cameras and 32 AI Streams, MTBF: Min. 1.5 Million Hours, Workload Rating: 550 TB/Year, Compliant-CE or RoHS or ISO, Min-2-Year Warranty viewable in OEM site, Made Year -AD 2025 Onwards(acceptable)	थान	१५८,०००
२२२	8 Channel NVR	8-channel Network Video Recorder (NVR) supporting H.265/H.264 video compression, up to 8 MP IP camera recording, minimum 80 Mbps incoming bandwidth, 1 SATA interface supporting up to 8 TB surveillance HDD or higher, HDMI and VGA simultaneous video output, 10/100 Mbps Ethernet port, minimum 2 USB ports, ONVIF-compatible, local and remote live view/playback, minimum 1-year warranty.	थान	१०,९००
२२३	8 Channel NVR	Support for Minimum 8 IP Cameras, H.265/H.264 Video Compression, Minimum 80 Mbps incoming bandwidth, Dual SATA Interfaces with Support for 2 HDDs up to 8TB, HDMI and VGA Video Output, Gigabit Ethernet Port, USB 2.0/3.0 Ports, Recording Resolution up to 8 MP or Higher, Remote Monitoring via Web/Mobile Application, ONVIF Compatible, 24x7 Continuous Recording, Rack/Desktop Mountable, Power Adapter Included, Minimum 1-Year Warranty.	थान	२३,५००
२२४	16 Channel NVR	Supports up to 16 video inputs; decoding format H.265/H.264 or better, max decoding up to 1-ch @ 8MP / 2-ch @ 4MP / 6-ch @ 1080p or better, supports minimum 140 Mbps incoming bandwidth, playback resolution up to 8MP or better, HDMI (4K) and VGA simultaneous video output, 2 SATA HDD slots supporting 16 TB per slot or better; 1 x RJ-45 (10/100/1000 Mbps); minimum 2 x USB Port; ONVIF compliant for third-party cameras; audio compression G.711u / G.711a; local and remote live view/playback, intelligent video analytics (motion detection, perimeter protection or equivalent), CE/FCC/ROHS certified; Warranty: Minimum 1 year.	थान	२०,५००
२२५	32 Channel NVR	Supports up to 32 video inputs; decoding format H.265/H.264 or better, max decoding up to 2-ch @ 8MP / 4-ch @ 4MP / 8-ch @ 1080p or better; supports 160 Mbps or higher bandwidth; playback resolution up to 8MP or better; HDMI (4K) and VGA simultaneous video output; 4 SATA HDD slots supporting 10TB per slot or better; 2 x RJ-45 (10/100/1000 Mbps); minimum 2 x USB; power supply AC 100-240V, 50/60Hz; ONVIF compliant for third-party cameras; audio compression G.711u / G.711a; smart features include face detection, perimeter protection, and motion detection; operating temperature -10°C to 55°C; CE/FCC/ROHS certified; Warranty: Minimum 1 year.	थान	४५,०००

२४/६७

महेश कुमार
विभागीय प्रमुख
विभाग

मुक्तिराम अर्याल
प्रमुख प्रशासकीय अधिकृत

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
२२६	64 Channel NVR	Supports 64 video inputs; HDD up to 128TB (8 × 16TB); RAID 0,1,5,6,10; 320 Mbps bandwidth (in,out); 2 HDMI (4K), 2 VGA (1080p/60Hz) outputs; 1-channel RCA audio; H.265 compression; max decoding 2-ch @ 32MP (25 fps); recording up to 32MP; 2 USB 2.0, 2 USB 3.0; 2 RJ45 10/100/1000 Mbps; supports IPv4, IPv6, HTTP, TCP/IP, DHCP, DNS; 16 alarm inputs, 8 outputs; Support Face Recognition and ANPR Camera, 100-240 VAC power; CE, FCC certified; operates - 10°C to +55°C; Warranty: Minimum 1 year.	थान	१४०,०००
२२७	64 Channel NVR	Supports 64 video inputs; HDD up to 64TB (4 × 16TB); RAID 0,1,5,6,10; 320 Mbps bandwidth (in,out); 2 HDMI (4K), 2 VGA (1080p/60Hz) outputs; 1-channel RCA audio; H.265 compression; max decoding 2-ch @ 32MP (25 fps); recording up to 32MP; 2 USB 2.0, 2 USB 3.0; 2 RJ45 10/100/1000 Mbps; supports IPv4, IPv6, HTTP, TCP/IP, DHCP, DNS; 16 alarm inputs, 8 outputs; Support Face Recognition and ANPR Camera, 100-240 VAC power; CE, FCC certified; operates - 10°C to +55°C; Warranty: Minimum 1 year.	थान	११०,०००
२२८	MC Chassis	Media Converter Rack Specification: Supports up to 14 media converter slots; metal enclosure; standard 2U rack height.	थान	१४,०००
२२९	CCTV PVC Junction Box (3" × 3")	Size: 3" × 3" (75 × 75 mm), High-Quality PVC Construction, Weather-Resistant, Suitable for Indoor and Outdoor CCTV Camera Installations, Cable Entry Provision, Surface Mount Type, White or Equivalent Color.	थान	१२५
२३०	CCTV PVC Junction Box (4" × 4")	Size: 4" × 4" (100 × 100 mm), High-Quality PVC Construction, Weather-Resistant, Suitable for Indoor and Outdoor CCTV Camera Installations, Cable Entry Provision, Surface Mount Type, White or Equivalent Color.	थान	२५०
२३१	Metal Pole Box	Type: Outdoor; dimensions approximately 320 × 280 × 255 mm; water and dust proof, equipped with locking mechanism, cable knockouts, and mounting provisions.	थान	२,७५०
२३२	Waterproof PVC Junction box	Type: Outdoor; suitable for switch and power cables mounting; water and dust proof, equipped with locking mechanism, cable knockouts, and mounting provisions made by PVC.	थान	१,५००
२३३	Pole Box Tagging Waterproof Sticker	Outdoor laminated waterproof KMC name and logo printed sticker to be affix in outdoor pole box/junction box, having size at least: 21X11 cm	थान	९०
२३४	Fiber Cable Tagging Waterproof Sticker	Outdoor laminated waterproof KMC name and logo printed sticker to be affix in all outdoor fiber cable, cat6 cable and power cable, having size at least: 30.5X6.5 cm	थान	३०
२३५	3 Kva online UPS	Type: online UPS; Capacity: 3kVA/ 48 V minimum; Input Voltage: 220-240V AC, single-phase; Output Voltage: Pure sine wave, 220-240V AC; Battery: Compatible with external battery bank; Protections: Overvoltage, undervoltage, short circuit, overload; Communication: Basic monitoring interface (RS232/USB); Display: Basic status indicators for power and battery; Operating Conditions: Suitable for typical office environment; Warranty: Minimum 1 year.	थान	५८,०००
२३६	5 Kva online UPS	Type: online UPS; Capacity: 5kVA / 96V minimum; Input Voltage: 220-240V AC, single-phase; Output Voltage: Pure sine wave, 220-240V AC; Battery: Compatible with external battery bank; Protections: Overvoltage, undervoltage, short circuit, overload; Communication: Basic monitoring interface (RS232/USB); Display: Basic status indicators for power and battery; Operating Conditions: Suitable for typical office environment; Warranty: Minimum 1 year.	थान	११५,०००
२३७	10 Kva online UPS	Type: online UPS; Capacity: 10kVA / 192 or 240 VDC minimum; 8KW; Input Voltage: 220-240V AC, 1-1-phase; Output Voltage: Pure sine wave, 220-240V AC; Battery: Compatible with external battery bank; Protections: Overvoltage, undervoltage, short circuit, overload; Communication: Basic monitoring interface (RS232/USB); Display: Basic status indicators for power and battery; Operating Conditions: Suitable for typical office environment; Warranty: Minimum 1 year.	थान	२३०,०००
२३८	Battery 100 ah Tubular	Capacity: 100Ah; Type: Tubular Flooded Lead Acid, 12V nominal; Design Life: Minimum 5 years; Operating Temp: -5°C to +40°C; Maintenance: Low maintenance; Terminals: Bolt or Faston type; Standards: Compliant with IEC/IS or equivalent; Minimum 2 year replacement Warranty.	थान	२२,०००
२३९	Battery 150 ah Tubular	Capacity: 150Ah; Type: Tubular Flooded Lead Acid, 12V nominal; Design Life: Minimum 5 years; Operating Temp: -5°C to +40°C; Maintenance: Low maintenance; Terminals: Bolt or Faston type; Standards: Compliant with IEC/IS or equivalent; Minimum 2 year replacement Warranty.	थान	२८,०००
२४०	Battery 35 ah	Type: Sealed Maintenance-Free (SMF), Lead-Acid Battery; Capacity: 35Ah; Nominal Voltage: 12V; Technology: VRLA/AGM or better; Operating Temp: -5°C to +40°C; Terminals: Corrosion-resistant, top or front type; Usage: Compatible with UPS, Solar, and Telecom systems; Minimum 1 year replacement Warranty.	थान	११,०००
२४१	Battery 65 ah	Type: Sealed Maintenance-Free (SMF), Lead-Acid Battery; Capacity: 65Ah; Nominal Voltage: 12V; Technology: VRLA/AGM or better; Operating Temp: -5°C to +40°C; Terminals: Corrosion-resistant, top or front type; Usage: Compatible with UPS, Solar, and Telecom systems; Minimum 1 year replacement Warranty.	थान	२७,०००

०२/११/२०२४
विभागीय प्रमुख
प्रशासन विभाग

मुक्तिराम अर्याल
प्रमुख प्रशासकीय अधिकृत

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
२४२	Battery 75 ah	Type: Sealed Maintenance-Free (SMF), Lead-Acid Battery; Capacity: 75Ah; Nominal Voltage: 12V; Technology: VRLA/AGM or better; Operating Temp: -5°C to +40°C; Terminals: Corrosion-resistant, top or front type; Usage: Compatible with UPS, Solar, and Telecom systems; Minimum 1 year replacement Warranty.	थान	३०,५००
२४३	Battery 100 Ah	Type: Sealed Maintenance-Free (SMF), Lead-Acid Battery; Capacity: 100Ah; Nominal Voltage: 12V; Technology: VRLA/AGM or better; Operating Temp: -5°C to +40°C; Terminals: Corrosion-resistant, top or front type; Usage: Compatible with UPS, Solar, and Telecom systems; Minimum 1 year replacement Warranty.	थान	३३,५००
२४४	Battery 150 Ah	Type: Sealed Maintenance-Free (SMF), Lead-Acid Battery; Capacity: 150Ah; Nominal Voltage: 12V; Technology: VRLA/AGM or better; Operating Temp: -5°C to +40°C; Terminals: Corrosion-resistant, top or front type; Usage: Compatible with UPS, Solar, and Telecom systems; Warranty: Minimum 1 year replacement.	थान	५०,५००
२४५	Battery 200 Ah	Type: Sealed Maintenance-Free (SMF), Lead-Acid Battery; Capacity: 200Ah; Nominal Voltage: 12V; Technology: VRLA/AGM or better; Operating Temp: -5°C to +40°C; Terminals: Corrosion-resistant, top or front type; Usage: Compatible with UPS, Solar, and Telecom systems; Warranty: Minimum 2 years.	थान	६७,५००
२४६	Battery 100 AH	Capacity: 100Ah; Type: Lead Acid, 12V nominal; Design Life: Minimum 5 years; Operating Temp: -5°C to +40°C; Maintenance: Low maintenance; Terminals: Bolt or Faston type; Standards: Compliant with IEC/IS or equivalent; Warranty: Minimum 2 years.	थान	३३,०००
२४७	Battery 150 AH	Capacity: 100Ah; Type: Lead Acid, 12V nominal; Design Life: Minimum 5 years; Operating Temp: -5°C to +40°C; Maintenance: Low maintenance; Terminals: Bolt or Faston type; Standards: Compliant with IEC/IS or equivalent; Warranty: Minimum 2 years.	थान	४५,५००
२४८	IP Telephone	Device type: IP phone; supports minimum 2 SIP accounts; LCD display with at least 132x48 pixels or equivalent; audio codec support for G.711, G.722 or similar; PoE supported; HD voice enabled; dual 10/100 Mbps Ethernet ports; security features include SRTP and TLS; basic features: call transfer, mute, call waiting, call log, and minimum 3-way conference; desktop and wall mountable; Docs: Datasheet	थान	७,५००
२४९	SIP Server	Supports minimum 200 SIP users; handles at least 40 concurrent calls; includes minimum 2 FXS analog ports; dual 10/100 Mbps Ethernet or better; audio codecs: G.711, G.722, G.729 or similar; video codec: H.264 or similar; SIP trunk supported; call features include IVR/auto attendant, call recording, forwarding, transfer, voicemail, call queues, and minimum 3-way conference; built-in call recording with internal or external storage; security with TLS, SRTP, IP filtering or equivalent; supports auto-provisioning, multisite/remote access, and web GUI; Warranty: Minimum 1 year.	थान	५०,५००
२५०	SIP Server	Minimum 200 SIP users should work in default and expandable upto 800 in future; handles at least 60 concurrent calls; includes minimum 4 FXS analog out ports and 4 FXO analog input port for telephone line in; dual 10/100/1000 Mbps Ethernet or better; audio codecs: G.711, G.722, G.729 or similar; video codec: H.264 or similar; SIP trunk supported; Dual Core CPU; call features include IVR/auto attendant, call recording, forwarding, transfer, voicemail, call queues, and minimum 3-way conference; built-in call recording with internal or external storage; security with TLS, SRTP, IP filtering or equivalent; supports auto-provisioning, multisite/remote access, and web GUI; Warranty: Minimum 1 year.	थान	५२,५००
२५१	IRIS Scanner Device	Scanner Type-Dual IRIS Scanner, Image Resolution-640 x 480 pixels per iris image or better, Image Format - JPEG/TIFF/PNG, Compression - 1:10, Image Representation - Base 64 string, Standard-ISO/IEC 19794-6:2011 or above, Capture Time-less than 1 second, Interface- USB 2.0 High Speed or better, Protection Rating-IP64/IP65, certifications - CE/FCC/ROHS, Applications-National ID enrollment, Civil Registration, SDK Support-SDK for integration with biometric applications, Warranty: Minimum 1 year.	थान	६०,५००
२५२	Biometric Fingerprint Scanner Device	USB Optical Fingerprint Scanner, FBI PIV/FAP 20 or or Equivalent International Certification, Optical or Capacitive Sensor, Minimum 500 dpi Resolution, 8-bit grayscale, USB 2.0/3.0 Interface, Capture Area Suitable for Single Flat/Rolled Fingerprint Acquisition, Live Finger Detection, Fast Capture and Matching Performance, SDK/API Support for Windows, Durable Scratch-Resistant Platen, CE/FCC/RoHS Certified, Minimum 1-Year Warranty.	थान	१४,६००

००६६
प्रमुख प्रशासकीय विभाग

मुक्तिराम अर्याल
प्रमुख प्रशासकीय अधिकृत

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
२५३	Biometric Access Control Device	CPU: Dual-core processor or better; Memory: Minimum 1 GB RAM and 8 GB ROM; Authentication: Face recognition and fingerprint with RFID/smart card (125 kHz/13.56 MHz) support; Capacity: Minimum 10,000 users, 5,000 cards, and 100,000 event logs; Features: Mask detection, ≤0.5-second recognition speed, minimum 1 m recognition distance, 5-inch or larger touchscreen display, Face/Card/PIN/Fingerprint authentication, built-in door relay, audio and LED prompts, role-based user management, time zones, schedules, and anti-passback; Connectivity: TCP/IP Ethernet, Wiegand I/O, RS-485, relay output, USB or better; Installation: Wall-mounted or equivalent; Operating Temperature: -5°C to +45°C or better; Power: DC 12V/2A or manufacturer recommended; Software: Third-party/cloud integration support with SDK/API, firmware upgrade via network or USB, and data export in CSV/Excel/PDF formats; Accessories: POE Mini UPS with minimum 8800 mAh lithium battery, 12V DC output and built-in 100-240 VAC adapter, Compliance: CE/FCC/RoHS/ISO or equivalent; Warranty: Minimum 1-year full product warranty.	थान	६५,०००
२५४	Attendance Device with battery backup	CPU-Min. Dual-core processor, RAM/ROM -Min. 256 MB / 4GB , Auto Push Data Technology- Real time cloud-based auto push technology, Face/Fingerprint/Card Capacity-Min 3000, Logs-Min 100000, Display- At least 4.3-inch Touch Display, Language - English (Default), Communication - At least TCP/IP, WIFI, USB, Battery- At least in-built or External (2000 mAh battery) , Recognition Speed- Less than or equal to 0.5 Sec ,SDK- Should Support/ Provide Realtime Data to Attendance Software of KMC, Certifications -CE or FCC or Rohs , Installation included with at least 100meter Cat6 Warranty - Minimum 1 Years Product Warranty.	थान	३५,५००
२५५	Attendance Device Metal Cover Box	Heavy-duty powder-coated metal protection box with lockable tempered glass front door, designed to securely accommodate the biometric attendance device and backup battery/mini UPS, with adequate ventilation, cable entry/exit provisions, wall-mounting support, corrosion-resistant finish, and all necessary mounting accessories or better.	थान	७,०००
२५६	Multi-Biometric Access Control	CPU-Min. Dual-core processor, RAM/ROM -Min. 256 MB / 4GB , Auto Push Data Technology- Real time cloud-based auto push technology, Face/Fingerprint/Card Capacity-Min 1200, Logs-Min 100000, Display- At least 2.4-inch Display, Physical Keypad with alphanumeric, Language - English (Default), Communication - At least TCP/IP, USB, Electric Lock*1, Door Sensor*1, Exit Button*1, Recognition Speed- Less than or equal to 0.5 Sec. , Certifications -CE or FCC or Rohs , Required Accessories (Electromagnetic Lock holding capacity min 280 kg, ZL Bracket, No touch Sensor Switch, Min. 100 mtr cat6 cable, Compatible hydraulic door closer) and installation included. Warranty - Minimum 1 Years Product Warranty.	थान	४२,५००
२५७	Card Holder Horizontal	Horizontal Card Holder for Staff ID Card.	थान	३५
२५८	Color Ribbon	Color Ribbon Should be Compatible with Existing Matica MC660 Card Printer at IT Department.	थान	२२,०००
२५९	Retransfer Film	Retransfer Film Should be Compatible with Existing Matica MC660 Card Printer at IT Department.	थान	९,५००
२६०	Card Holder Vertical	Vertical Card Holder for Metro Police IT Card.	थान	३५
२६१	Card Holder Clip	Card Holder Clip for Vertical Card Holder.	थान	४०
२६२	Lanyard (Blue, Red, Green)	Lanyard (Blue, Red, Green) Card Holder for Staff ID Card (as per sample provided)	थान	८०
२६३	RF card	Standard ID card size (CR80), operating frequencies like 125 kHz, 13.56 MHz etc	थान	३५
२६४	Plain PVC card	Standard ID card size (CR80)	थान	२५
२६५	Cleaning Kit	Cleaning Kit Should be Compatible with Existing Matica MC660 Card Printer at IT Department.	थान	१८,०००

मेट्रो एफएमबाट प्रसारण हुने कार्यक्रम सम्बन्धी

क्र.स.	विवरण	उप- विवरण	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१	कार्यक्रम उत्पादन खर्च (बाह्य व्यक्ति वा संस्था)	म्यागेजिंग	१५ मिनेट	५०००
२	कार्यक्रम उत्पादन + प्रसारण खर्च (कर्मचारी - कार्यालय समय बाहेक)	म्यागेजिंग	३० मिनेट	३०००
३	प्रसारण खर्च (विहान ५-६ बजे, विहान ११-१ बजे, बेलुका ९-११ बजे)	मनोरन्जनात्मक कार्यक्रम	१ घण्टा	४००
	प्रसारण खर्च (अन्य समय)	सूचना तथा जानकारीमुलक कार्यक्रम	१ घण्टा	८००

विभागीय प्रशासन विभाग

मुक्तिराम अग्रवाल
प्रशासकीय अधिकृत

Mapping सम्बन्धी कार्य

S.N.	Items	Minimum Specification	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति दिन भाडा)
1	Total Station	Angle Accuracy : 5" (arc-seconds) Telescope Magnification : 30× Reflectorless Range : Up to 500 m Prism Range : Up to 4,000 m (ideal up to 5,000–6,000 m) Distance Accuracy (Prism) : ±(2 mm + 2 ppm × D) Distance Accuracy (No Prism) : ±(3 mm + 2 ppm × D) Measurement Time : Fine: 0.9 s, Rapid: 0.7 s, Tracking: 0.3 s Data Storage : 10,000 points internal + USB (up to 8 GB) Battery Life : Up to 36 hours (with standard battery) Environmental Rating : IP66 (dust and water resistant)	Per Unit	२५००
2	Mapping Drone below 2 Kg	Weight (with propellers) : 1 kg Maximum Flight Time : Up to 40 minutes Maximum Horizontal Speed : Up to 12 m/s Wind Resistance : Up to 10 m/s Maximum Operating Altitude : Up to 5,000 m above sea level Wide-Angle Camera : 20 MP, 4/3" CMOS sensor, mechanical shutter Transmission Range : Up to 10 km Positioning Accuracy (with RTK) : ±0.1 m horizontal and vertical Obstacle Avoidance : Omnidirectional sensors	Per Unit	४५००
3	Mapping Drone above 2 Kg	Weight (with batteries) : 5 kg Max Takeoff Weight : 8 kg Max Flight Time : Up to 50 minutes Max Horizontal Speed : 15 m/s (Sport mode) Max Wind Resistance : 12 m/s Operating Temperature : -20 °C to 50 °C Operating Altitude : Up to 7,000 m RTK Positioning Accuracy : Horizontal: ±0.1 m; Vertical: ±0.1 m Obstacle Avoidance : Omnidirectional sensors Ingress Protection Rating : IP45	Per Unit	१२५००
4	Handheld SLAM LiDAR Scanner (Standard)	Weight : 1 kg Scanning Rate : Up to 200,000 points per second LiDAR Accuracy (Absolute) : 3 cm Relative Accuracy : 2 cm Maximum Range : Up to 70 m (at 80% reflectivity) Field of View (LiDAR) : 360° × -7~+52° Field of View (Camera) : 360° × 360° Camera System : Dual 48 MP panoramic Battery Life : Up to 1.5 hours Environmental Protection : IP54	Per Unit	१००००
5	Handheld SLAM LiDAR Scanner (Advanced)	Weight : 2 kg Scanning Rate : Up to 600,000 points per second LiDAR Accuracy (Absolute) : 3 cm Relative Accuracy : 2 cm Maximum Range : Up to 120 m (at 80% reflectivity) Field of View (LiDAR) : 360° × 270° Field of View (Camera) : 190° × 190° Camera System : Dual 48 MP panoramic Battery Life : Up to 1.5 hours Environmental Protection : IP54	Per Unit	१००००
6	Handheld Reality Capture Camera (3DGS Optimized)	Weight : ≤ 1 kg Imaging : ≥ 4 camera modules / high-resolution panoramic Camera System : 2 × fisheye, 2 × front LiDAR : Integrated, for geometry and scale Field of View (LiDAR) : 180° × 180° Scanning Range : Up to 30 m Operation : Indoor and outdoor Battery Life : Up to 1.5 hours Output : High-resolution 3D Gaussian Splat	Per Unit	८०००
7	Drone Mounted LiDAR	Weight : 900 g LiDAR Channels : 32 channels Scanning Rate : Up to 240,000 points per second Maximum Range : Up to 100 m Accuracy (Absolute) : ±5 cm Relative Accuracy : ±3 cm Field of View (Vertical) : 50° Operating Temperature : -20 °C to 50 °C Positioning : Integrated GNSS and IMU Compatible Platforms : Drone above 2 kg weight	Per Unit	१२५००

विभागीय प्रमुख
प्रशासन विभाग

S.N.	Items	Minimum Specification	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति दिन भाडा)
8	Data Processing (Photogrammetry)	GCP Integration : Included	Per Sq KM	१००००
		Orthophoto : Included		
		Classification Method : Automated		
		Classified Point Cloud Generation : Automated classification output		
		DTM, DEM and Contour Generation : Included		
		3D Mesh : Included		
9	Data Processing (Photogrammetry)	GCP Integration : Included	Per Sq KM	१५०००
		Orthophoto : Included		
		Classification Method : Manual + Automated		
		Classified Point Cloud Generation : Manually verified classification		
		DTM, DEM and Contour Generation : Included		
		3D Mesh : Included		
10	Data Processing (LiDAR + Photogrammetry)	GCP Integration : Included	Per Sq KM	१५०००
		Orthophoto : Included		
		Classification Method : Automated		
		Classified Point Cloud Generation : Automated classification output		
		DTM, DEM and Contour Generation : Included		
		3D Mesh : Included		
11	Data Processing (LiDAR + Photogrammetry)	GCP Integration : Included	Per Sq KM	२००००
		Orthophoto : Included		
		Classification Method : Manual + Automated		
		Classified Point Cloud Generation : Manually verified classification		
		DTM, DEM and Contour Generation : Included		
		3D Mesh : Included		
12	Videography (Site Recce & Structure Position Guidance) – Raw / Non-Edited	Purpose : Site reconnaissance and structure position guidance (non-cinematographic)	Per Sq KM	३०००
		Footage Type : Raw / non-edited		
		Editing : Not included		
		Location Tagging : Not included		
		Delivery Format : Unprocessed raw video files		
13	Videography (Site Recce & Structure Position Guidance) – Edited, Location-Pinned	Purpose : Site reconnaissance and structure position guidance (non-cinematographic)	Per Sq KM	५०००
		Footage Type : Edited		
		Editing : Included (cuts, annotations)		
		Location Tagging : Specific locations pinned / geotagged		
		Delivery Format : Edited video with pinned location markers		
14	3D Gaussian Splat (3DGS) & Point Cloud Delivery	Level of Detail : Coarse (outdoor – large area) / Standard / Fine / High	Per Sq m	३० / ७० / १२० / २००
		Method : 3D Gaussian Splatting (radiance-field reconstruction)		
		Colorization : Photorealistic true-colour		
		Georeferencing : Aligned to point-cloud coordinate system (optional)		
		Web Delivery : 3D Tiles, web-viewer compatible (optional)		
		Delivery Formats : .ply, .splat, .lcc, .usd, .las, .laz, .e57		
		Point Cloud Processing Level : Raw / Cleaned / Classified	Additional Per Sq m	१५ / २५ / ४०
15	DGPS	Operating Temperature : -20 °C to +65 °C	Per Unit	२५००
		Ingress Protection : IP65 (dust-tight and waterproof)		
		Battery Type : Li-ion 6400 mAh		
		Battery Life : 8 hours as RTK rover; 12 hours logging		
		External Power Input : 6-40 V via external power input		
		Supported GNSS Systems : GPS, GLONASS		
		RTK Accuracy : Horizontal: 8 mm + 1 ppm; Vertical: 14 mm + 1 ppm		
		PPK Accuracy : Horizontal: 6 mm + 0.5 ppm; Vertical: 10 mm + 1 ppm		
		Static Accuracy : Horizontal: 5 mm + 0.5 ppm; Vertical: 8 mm + 1 ppm		
		Update Rate : Up to 10 Hz for GPS; 5 Hz for GNSS		
		Connectivity : 3.5G modem, Wi-Fi 802.11 b/g/n, Bluetooth 4.0 / 2.1 EDR		
		NTRIP Support : Supported		
		External Radio : Built-in UHF radio (868 / 915 MHz), range up to 8 km line-of-sight		
		SIM Card Slot : Nano SIM slot for mobile data connectivity		

प्रमुख प्रशासकीय अधिकृत
विमानिक प्रमुख
प्रशासन विभाग

S.N.	Items	Minimum Specification	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति दिन भाडा)
16	Drone Pilot (Mapping and Inspection)	Certification / License : Valid drone pilot license / minimum Diploma in Surveying or Geomatics Engineering Flight Hours : Minimum 10-50 logged flight hours certified by licence provider, or three-plus years with a drone service provider institution Knowledge of Aviation Rules : Understanding of local aviation laws and regulations Operational Skills : Proficiency in operating different drone types and models Safety Training : Training on emergency procedures and safe flight practices Visual Line of Sight (VLOS) Operation : Able to maintain VLOS, or operate BVLOS if certified Weather Awareness : Able to assess weather conditions safe for drone operation Equipment Maintenance : Basic drone maintenance and troubleshooting Mapping / Surveying Knowledge : Understanding of photogrammetry, LiDAR or aerial mapping principles Communication Skills : Able to coordinate with team and air traffic control if necessary	Per Day	४०००
17	DGPS Operator	Educational Background : Diploma in Surveying / Geomatics DGPS Equipment Knowledge : Proficient in operating DGPS receivers and base stations Surveying Skills : Understanding of surveying principles and techniques Coordinate Systems & Projections : Knowledge of local and global coordinate systems (e.g. WGS84, UTM, MUTM) Data Collection & Processing : Able to collect accurate GPS data and process corrections Field Experience : Experience working on surveying sites with DGPS equipment Maintenance Skills : Basic troubleshooting and maintenance of DGPS equipment Software Proficiency : Familiar with GIS, CAD and GNSS data processing software Communication Skills : Effective communication for coordination with survey teams Safety Awareness : Knowledge of field safety procedures and regulations	Per Day	२५००
18	DGPS Static Post Processing	Responsible : DGPS Operator	Per Point	८५०

बोटबिरुवा र उद्यान सामग्री

क्र.स.	मालसामानको विवरण	स्पेसिफिकेशन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१	घाँस काट्ने मेसिनको Blade	घाँस काट्ने	थान	३,०००
२	औषधी छर्ने पम्प	प्लाष्टिकको ५ लिटरको	थान	१,८००
३	औषधी छर्ने पम्प	प्लाष्टिकको ८ लिटरको	थान	२,८००
४	औषधी छर्ने पम्प	प्लाष्टिकको १० लिटरको	थान	३,५००
५	औषधी छर्ने पम्प	प्लाष्टिकको १६ लिटरको	थान	६,५००
६	हजारी	प्लाष्टिकको १० लिटरको	थान	५६०
७	हजारी	प्लाष्टिकको ५ लिटरको	थान	४२०
८	मौरी गोला घर सहित	काठको	घार	१८,०००
९	COPPER OXYCHLORIDE		के जी	१,५४०
१०	सिक्रेचर	FOLCON or equivalent, 8 inch	थान	३,८००
११	निमको पिना		के जी	१५०
१२	निमको तेल	100ML	थान	१९०
१३	कोकोपिट		के जी	१२०
१४	किंग पाम	२ फिट भन्दा माथि	बोट	१,८००
१५	न्याविज पाम	२ फिट भन्दा माथि	बोट	१,९४२
१६	स्नेक पाम	२ फिट भन्दा माथि	बोट	१,४४०
१७	असोक्रा	५ फिटको	बोट	१,९००
१८	वेगमवेली बन्साई	२-३ फिटको	बोट	१,०००
१९	डाइफन भेसिया	२-३ फिटको	बोट	१,०४०
२०	फिलोडेन्डण	२-३ फिटको	बोट	१,६००
२१	चाइनिज मचेरा	२-३ फिटको	बोट	३,०००

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
२२	ड्रेसिना	२ - ३ फिटको	बोट	१,४२०
२३	लक्की ब्रेम्बो	२ - ३ फिटको	बोट	१,४५०
२४	भेरिकेटोर ड्रेसिना	२ - ३ फिटको	बोट	१,५००
२५	फिडल लिफ	२ - ३ फिटको	बोट	१,६००
२६	एग्लोनिमा	२ - ३ फिटको	बोट	१,५५०
२७	जिजि प्लार	२ - ३ फिटको	बोट	१,६००
२८	सेप्लोरिया	२ - ३ फिटको	बोट	१,४६०
२९	पिस लिली	२ - ३ फिटको	बोट	१,५४०
३०	स्पाथि फेलम	१ फिटको	बोट	१,८००
३१	नास्पातीको बोट	३ फिटको	बोट	९६०
३२	अंगुरको बोट	३ फिटको	बोट	६००
३३	जैतुनको बोट	३ फिटको	बोट	५००
३४	पिकानटको बोट	३ फिटको	बोट	९५०
३५	निमको बोट	३ फिटको	बोट	८००
३६	सिमेन्टको गमला	३० इन्चको ठुलो	थान	४,०००
३७	सिमेन्टको गमला	२४ इन्चको ठुलो	थान	२,५००
३८	सिमेन्टको गमला	२० इन्चको ठुलो	थान	२,४००
३९	माटोको गमला	१० इन्चको	थान	१६०
४०	माटोको गमला	१२ इन्चको	थान	२८०
४१	माटोको गमला	१४ इन्चको	थान	४००
४२	माटोको गमला	१६ इन्चको	थान	६४०
४३	सेरामिकको गमला प्लेट सहित	१० इन्चको	थान	८००
४४	सेरामिकको गमला प्लेट सहित	१२ इन्चको	थान	१,५००
४५	सेरामिकको गमला प्लेट सहित	१४ इन्चको	थान	१,८००
४६	सेरामिकको गमला प्लेट सहित	१६ इन्चको	थान	१,८५०
४७	फाइबरको गमला प्लेट सहित	३० इन्चको ठुलो	थान	३,८००
४८	फाइबरको गमला प्लेट सहित	२४ इन्चको ठुलो	थान	३,५००
४९	फाइबरको गमला प्लेट सहित	१० इन्चको	थान	९००
५०	फाइबरको गमला प्लेट सहित	१२ इन्चको	थान	१,०००
५१	फाइबरको गमला प्लेट सहित	१४ इन्चको	थान	१,२००
५२	फाइबरको गमला प्लेट सहित	१६ इन्चको	थान	१,८००
५३	फाइबरको गमला प्लेट सहित	२४ इन्चको	थान	२,५००
५४	फाइबरको गमला प्लेट सहित	३० इन्चको	थान	३,५००
५५	सयपत्री	६ इन्चको पोलिब्याग	बोट	५०
५६	गोदावरी	६ इन्चको पोलिब्याग	बोट	२००
५७	भ्यागुते फुल	६ इन्चको पोलिब्याग	बोट	५०
५८	जिनिया	६ इन्चको पोलिब्याग	बोट	५०
५९	भिन्का	६ इन्चको पोलिब्याग	बोट	८०
६०	डालिया	६ इन्चको पोलिब्याग	बोट	१२०
६१	कोलियस	६ इन्चको पोलिब्याग	बोट	१२०
६२	कार्नेशन	६ इन्चको पोलिब्याग	बोट	१२०
६३	सयपत्री बोनान्जा	६ इन्चको पोलिब्याग	बोट	५०
६४	जरबेरा	६ इन्चको पोलिब्याग	बोट	२५०
६५	पितुनिया डबल सिंगल	६ इन्चको पोलिब्याग	बोट	१००
६६	असर्फी	६ इन्चको पोलिब्याग	बोट	८०
६७	दियानथस	६ इन्चको पोलिब्याग	बोट	८०
६८	पेन्जी	६ इन्चको पोलिब्याग	बोट	८०
६९	बागमुखी	६ इन्चको पोलिब्याग	बोट	६०
७०	सिनेरिया	६ इन्चको पोलिब्याग	बोट	५०
७१	प्राईमरोज	६ इन्चको पोलिब्याग	बोट	५०
७२	दालिया	६ इन्चको पोलिब्याग	बोट	५०
७३	सिजनल फुल	६ इन्चको पोलिब्याग	बोट	५०
७४	डी ए पि मल		के जी	१२०

विभागीय प्रमुख
वन विभाग

मुक्तिराम अर्याल
सहायक प्रमुख

क्र.स.	मालसामानको विवरण	स्पेसिफिकेशन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
७५	युरिया मल		के जी	६०
७६	पोटास मल		के जी	८०
७७	चिनी मल		के जी	९०
७८	हड्डी मल		के जी	९०
७९	खरानीको धुलो		के जी	१०
८०	पिटमस		के जी	१०
८१	बलौटे माटो		घन मि	२५०
८२	हर्न मिल		के जी	२००
८३	फिसमिल		के जी	२६०
८४	पाइप	प्लास्टिकको १ इन्चको, बगैचामा पानी हाल्ने	रोल	३,०००
८५	तार बुश		गोटा	१.६१
८६	बासको भाटा	६ फिट अग्लो १.५ इन्च मोटाई को	गोटा	६०
८७	कृषि चुन		के जी	६०
८८	कम्पोस्ट मल	प्याकेट	केजी	३५
८९	भर्मी कम्पोस्ट मल		के जी	७०
९०	माछाको दाना		के जी	२९०
९१	एल डी पोली		के जी	४००
९२	नीलकाडा हेज	६ इन्चको पोलिब्याग	बोट	६०
९३	३ फिट सम्मको धूपीको बोट trimming गरि साईट सफा गर्ने		गोटा	५०
९४	३-५ फिट सम्मको धूपीको बोट trimming गरि साईट सफा गर्ने		गोटा	१२५
९५	५ फिट भन्दा ठुलो धूपीको बोट trimming गरि साईट सफा गर्ने		गोटा	३५०
९६	हेज trimming गरि साईट सफा गर्ने		रनिङ मिटर	८०
९७	५ फिट सम्मको रुख साईज मिलायर trimming गरि साईट सफा गर्ने कार्य		गोटा	१००
९८	५-१०फिट सम्मको रुख साईज मिलायर trimming गरि साईट सफा गर्ने कार्य		गोटा	२२५
९९	१० फिट भन्दा ठुलो रुख साईज मिलायर trimming गरि साईट सफा गर्ने कार्य		गोटा	५००
१००	टिगाई निकाल्ने र टेकु सम्म पुर्याउनेकार्य		गोटा	४८०

बाघ वादनका सामग्री

क्र.स.	मालसामानको विवरण	स्पेसिफिकेशन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१	धिमे	काठको ठुलो (१४"-१५" मुख भएको २०" लम्बाई भएको)	थान	१८,०००
२	धिमे	काठको मझौला (१२"-१३" मुख भएको १८" लम्बाई भएको)	थान	१४,०००
३	धिमे	काठको सानो (११"-१२" मुख भएको १७" लम्बाई भएको)	थान	१०,०००
४	धिमे	पित्तलको ठुलो (१५"-१६" मुख भएको २०" लम्बाई भएको)	थान	३०,०००
५	धिमे	पित्तलको मझौला (१३"-१४" मुख भएको १८" लम्बाई भएको)	थान	२५,०००
६	धा:	काठको ठुलो (११"-१२" मुख भएको १७" लम्बाई भएको)	थान	१०,०००
	धा:	काठको मझौला (१०"-११" मुख भएको १६" लम्बाई भएको)	थान	९,०००

प्रमुख प्रशासकीय अधिकृत
सब विभाग

क्र.स.	मालसामानको विवरण	स्पेसिफिकेशन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
८	नायोखि	काठको स्ट्याण्डर्ड साइज (७.५"-८.५" मुख भएको १५" लम्बाई भएको)	थान	७,०००
९	भुस्या:	काशको ठुलो (१२" गोलाई भएको काँस युटिन्सीयल, २ के.जी. तौल भएको)	थान	१९,०००
१०	भुस्या:	काशको मझौला (११" गोलाई भएको काँस युटिन्सीयल, १.५ के.जी. तौल भएको)	थान	९,०००
११	छुस्या:	स्ट्याण्डर्ड साइज (८" गोलाई भएको १.२ के.जी. काँस युटिन्सीयल)	थान	८,०००
१२	खि	काठको ठुलो (८"-१०" मुख भएको २४" लम्बाई भएको)	थान	२२,०००
१३	खि	काठको मझौला (७"-९" मुख भएको २३" लम्बाई भएको)	थान	१८,०००
१४	खि	काठको सानो (६.५"-८.५" मुख भएको २२" लम्बाई भएको)	थान	१६,०००
१५	कोचाखि	स्ट्याण्डर्ड साइज (८" मुख भएको २५" लम्बाई भएको काठको)	थान	१२,०००
१६	पछिमा	काठको ठुलो (८.५"-१०.५" मुख भएको २६" लम्बाई भएको)	थान	२१,०००
१७	पछिमा	काठको मझौला (८"-१०" मुख भएको २४" लम्बाई भएको)	थान	१९,०००
१८	मादल	काठको ठुलो (६"-८" मुख भएको २०" लम्बाई भएको)	थान	५,०००
१९	मादल	काठको मझौला (५.५"-६" मुख भएको १८" लम्बाई भएको)	थान	४,०००
२०	मादल	काठको सानो (५"-६" मुख भएको १५" लम्बाई भएको)	थान	३,०००
२१	ता:	ठुलो (३.५" मुखको गोलाई भएको हातले पिटेको काँसा युटिन्सीयल ४५० ग्राम तौल भएको)	जोर	१०,०००
२२	ता:	सानो (२.५" मुखको गोलाई भएको हातले पिटेको काँसा युटिन्सीयल ३०० ग्राम तौल भएको)	जोर	७,०००
२३	बबूचा जोडी	स्ट्याण्डर्ड साइज (४" मुखको गोलाई भएको, हातले पिटेको काँसा युटिन्सीयल, २०० ग्राम तौल भएको)	जोर	५,०००
२४	घौ	स्ट्याण्डर्ड साइज (७" मुखको गोलाई भएको, ढलोटबाट बनेको)	थान	५,०००
२५	जोर नगरा	माटोको ठुलो (९"-७" मुखको गोलाई भएको तामाको ६ के.जी. तौल भएको)	सेट	१८,०००
२६	जोर नगरा	तामाको ठुलो (९"-७" मुखको गोलाई भएको तामाको ६ के.जी. तौल भएको)	सेट	३०,०००
२७	जोर नगरा	तामाको मझौला (६"-८" मुखको गोलाई भएको तामाको ५ के.जी. तौल भएको)	सेट	२५,०००
२८	कान्ता डबडव	तामाको ३/३ को सेट	सेट	१२,०००
२९	कान्ता डबडव	काठको ३/३ को सेट	सेट	८,०००
३०	बाँसुरी	काठको घोर स्ट्याण्डर्ड साइज	थान	८,०००
३१	बाँसुरी	काठको माझवाल स्ट्याण्डर्ड साइज १६.५ लम्बाइ	थान	६,०००
३२	बाँसुरी	काठको तीप स्ट्याण्डर्ड साइज	थान	४,०००
३३	बाँसुरी	प्लाष्टिकको D Scale १७.५"	थान	१,०००
३४	बाँसुरी	बाँसको ठुलो G Scale २५"	थान	५,०००
३५	बाँसुरी	बाँसको मध्यम D Scale १७.५"	थान	३,०००
३६	बाँसुरी	बाँसको सानो G Scale १३"	थान	१,५००



३३/६७

प्रमुख प्रशासकीय अधिकृत

प्रमुख प्रशासकीय अधिकृत



क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
३७	बयु	काठको स्टाण्डर्ड साइज ११"	थान	४,०००
३८	चिम्टा झ्याली	नेवारी, काठमा छालाले मोडेको ९" मुख भएको	जोर	१५,०००
३९	चक्का झ्याली	नेवारी, २८ चक्का भएको १८" लम्बाई भएको	जोर	५,०००
४०	पोंगा सेट	तामाको स्टाण्डर्ड साइज ४२" लम्बाई भएको	थान	१३,०००
४१	पञ्चैबाजा सेट	दमाहा (२ थान) ४ के.जी. तौल भएको, तामालाई छालाले मोडेर बनाएको, १४" मुख भएको स्टाण्डर्ड साइज, नरसिङ्गा (२ थान) १.५ के.जी. तौल भएको, तामा र पित्तलले बनेको, ३७" लम्बाई भएको स्टाण्डर्ड साइज, सहनाई (२ थान) सतिसाल काठ, तामा र पित्तलबाट बनेको, १४" लम्बाई भएको स्टाण्डर्ड साइज, ट्याम्को (१ थान) ९" मुख भएको, तामाबाट बनेको, १.१ के.जी. तौल भएको, भ्याली/भ्याम्टा (१ जोर) ८" मुख भएको काँसा युटिन्सीयल, १.२ के.जी. तौल भएको, ढलकी (१ थान) ७"-८" मुख भएको १५" लम्बाई भएको काठको	सेट	११५,०००
४२	सारङ्गी परम्परागत	परम्परागत टुनि काठको २१" लम्बाई भएको	थान	९,०००
४३	सारङ्गी शास्त्रिय	शास्त्रिय सिसौ काठको २४" लम्बाई भएको	थान	२५,०००
४४	सारङ्गी कलात्मक	कलात्मक टुनि काठको बुझा भएको २२" लम्बाई भएको	थान	१२,०००
४५	ढ्यांग्रो ठुलो	ठुलो, काठको १५" गोलाई भएको, बाखाको छालाले मोडेको	थान	९,०००
४६	ढ्यांग्रो सानो	सानो, काठको ११" गोलाई भएको, बाखाको छालाले मोडेको	थान	७,०००
४७	खैजडी	खैजडी १०" मुख भएको, बाखाको छालाले मोडेको, काठको	थान	४,०००
४८	दः (६ कुने)	६ कुने, काठबाट बनेको, १९" लम्बाई भएको	थान	८,०००
४९	धोलक स्टाण्डर्ड	स्टाण्डर्ड १७" लम्बाई, १६ वटा चावि भएको, आँपको काठबाट बनेको	थान	१२,०००
५०	धोलक नेवारी	नेवारी स्टाण्डर्ड साइज १६" लम्बाई भएको, काठको तान छाला प्रयोग भएको	थान	१०,०००
५१	मुर्चुङ्गा ठुलो	ठुलो पित्तल वा तामाबाट बनेको, ४" लम्बाई भएको	थान	८००
५२	मुर्चुङ्गा मझौला	मझौला पित्तल वा तामाबाट बनेको, ३" लम्बाई भएको	थान	६००
५३	हार्मोनियम स्केल चेन्चर	स्केल चेन्चर विणा, ३ अप्टेक रिड भएको, फोल्डीङ्ग सिस्टम भएको, सुटकेस टाइपको ४२ पर्दा भएको	थान	१२०,०००
५४	हार्मोनियम विणा १७	विणा १७ फोल्डीङ्ग सिस्टम भएको, सुटकेस टाइपको	थान	४२,०००
५५	हार्मोनियम विणा ५	विणा ५ ३९ पर्दा भएको नर्मल	थान	२५,०००
५६	तबला	स्टाण्डर्ड साइज, ५"-९" व्यासको, काठको तबला माटोको बाँया भएको	सेट	१०,०००
५७	तबला	तामाको स्टाण्डर्ड साइज, ५.५"-९" व्यासको, काठको तबला तामाको बाँया भएको ५ के.जी. तौल भएको	सेट	३०,०००
५८	तबला	स्टिलको स्टाण्डर्ड साइज, ५.५"-९" व्यासको, काठको तबला स्टिलको बाँया भएको ३ के.जी. तौल भएको	सेट	१८,०००
५९	मंजिरा	ढलोटीको	थान	२,०००
६०	मुहालि	काठ र पित्तलले बनेको २२" लम्बाई भएको	थान	१३,०००
६१	कर्ताल	४ घोर कर्ताल, सिसौ काठबाट बनेको	थान	२,५००

व्यायाम सम्बन्धी सामग्री

सि.नं.	Items (Image for Reference purpose only)	Specification	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१		Single rower	No.	६२,०००
		1. Materials: Galvanized Mild steel pipes		
		2. Dimension: 1320mmx990mmx1140mm		
		3. Main frame pipe 114mm with thickness 3.5mm		
		4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm.		
		5. Bearing holder 60mm pipe with thickness 4.5mm.		
		6. Step shaft EN8.8 shaft of diameter 32mm used with step of 25mm.		
		7. Mild steel seat, back seat and foot cover with 2mm thickness.		
		8. Permanent lubricated sealed		
		9. All open ends of pipe either sealed or closed by MS/LLDPE cap for user safety.		
		10. Rubber handle cover with best grip.		
		11. Paint: Electrostatic oven cooked Powder Coated Paint.		
		12. Thickness of Base plate for fixing 8 mm with 4 ribs.		
		13. Foundation reinforcement: Four M16 X 480mm J bolt interconnected with each other with 6mm rod		
२		Air Walker	No.	६९,०००
		1. Materials: Galvanized Mild steel pipes		
		2. Dimension: 1320mmx440mmx1200mm		
		3. Main frame pipe 114mm with thickness 3.5mm.		
		4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. Bearing holder 60mm pipe with thickness 4.5mm.		
		5. Step EN8.8 shaft of 32mm used with step of 25mm.		
		6. Mild steel foot cover with thickness 2mm on frame.		
		7. Permanent lubricated sealed bearing		
		8. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety.		
		9. Paint: Electrostatic oven cooked Powder Coated Paint.		
		10. Thickness of Base plate for fixing 8 mm with 4 ribs.		
		11. Foundation reinforcement: Four M16 X 480mm J bolt interconnected with each other with 6mm rod		
३		Push and pull chair/Double Shoulder press	No.	९३,०००
		1. Materials: Galvanized Mild steel pipes		
		2. Dimension: 2100mmx710mmx1870mm		
		3. Main frame pipe 114mm with thickness 3.5mm.		
		4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. Bearing holder 60mm pipe with thickness 4.5mm.		
		5. Step EN8.8 shaft of 32mm used with step of 25mm.		
		6. Mild steel seat and back seat with thickness 2mm on frame.		
		7. Permanent lubricated sealed bearing		
		8. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety.		
		9. Rubber handle cover with best grip.		
		10. Paint: Electrostatic oven cooked Powder Coated Paint.		
		11. Thickness of Base plate for fixing 8 mm with 4 ribs.		
		12. Foundation reinforcement: Four M16 X 480mm J bolt interconnected with each other with 6mm rod		

प्रमुख प्रशासकीय विभाग





मुक्तिराम अर्याल
प्रमुख प्रशासकीय अधिकृत


सि.नं.	Items	Specification	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
४	Double Elliptical trainer 	1. Materials: Galvanized Mild steel pipes 2. Dimension: 1265mmx550mmx1780mm 3. Main frame pipe 114mm with thickness 3.5mm. 4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. Bearing holder 60mm pipe with thickness 4.5mm. 5. Step EN8.8 shaft of 32mm used with step of 25mm. 6. Mild steel foot cover with thickness 2mm on frame. 7. Permanent lubricated sealed 8. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety. 9. Rubber handle cover with best grip. 10. Paint: Electrostatic oven cooked Powder Coated Paint.. 11. Thickness of Base plate for fixing 8 mm with 4 ribs. 12. Foundation reinforcement: Four M16 X 480mm J bolt interconnected with each other with 6mm rod.	No.	७५,५००
५	Air Swing/Double surf board 	1. Materials: Galvanized Mild steel pipes 2. Dimension: 1465mmx932mmx1348mm 3. Main frame pipe 114mm with thickness 3.5mm. 4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. Bearing holder 60mm pipe with thickness 4.5mm. 5. Step EN8.8 shaft of 32mm used with step of 25mm. 6. Mild steel foot cover with thickness 2mm on frame. 7. Permanent lubricated sealed 8. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety. 9. Rubber handle cover with best grip. 10. Paint: Electrostatic oven cooked Powder Coated Paint.. 11. Thickness of Base plate for fixing 8 mm with 4 ribs. 12. Foundation reinforcement: Four M16 X 480mm J bolt interconnected with each other with 6mm rod.	No.	७२,०००
६	Double Splits machine 	1. Materials: Galvanized Mild steel pipes 2. Dimension: 1000mmx850mmx1248mm 3. Main frame pipe 114mm with thickness 3.5mm. 4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. Bearing holder 60mm pipe with thickness 4.5mm. 5. Step EN8.8 shaft of 32mm used with step of 25mm. 6. Mild steel foot cover with thickness 2mm on frame. 7. Permanent lubricated sealed 8. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety. 9. Rubber handle cover with best grip. 10. Paint: Electrostatic oven cooked Powder Coated 11. Thickness of Base plate for fixing 8 mm with 4 ribs. 12. Foundation reinforcement: Four M16 X 480mm J bolt interconnected with each other with 6mm rod.	No.	७२,०००
७	Sit-Up-board single/abdominal fitness combo 	1. Materials: Galvanized Mild steel pipes 2. Dimension: 1700mmx1350mmx800mm 3. Main frame pipe 114mm with thickness 3.5mm. 4. Handle frame 32mm and other frame 48mm pipe with thickness 3mm. 5. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety. 6. Paint: Paint: Electrostatic oven cooked Powder Coated Paint.. 7. Thickness of Base plate for fixing 8 mm with 4 ribs. 8. Foundation reinforcement: Four M16 X 480mm J bolt interconnected with each other with 6mm rod.	No.	४२,५००



प्रमाणित
विभागीय प्रमुख
विभाग

३६/६७




सुनितराम अग्रवाल
प्रमुख प्रशासकीय अधिकृत

सि.नं.	Items	Specification	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
८	Push Up bar, Leg lifter and Dip station 	1. Materials: Galvanized Mild steel pipes 2. Dimension: 1480mmx1680mmx2100mm 3. Main frame pipe 114mm with thickness 3.5mm. 4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. Bearing holder 60mm pipe with thickness 4.5mm. 5. Step EN8.8 shaft of 32mm used with step of 25mm. 6. Mild steel seat and back seat with thickness 2mm on frame. 7. Permanent lubricated sealed 8. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety. 9. Rubber handle cover with best grip. 10. Paint: Paint: Electrostatic oven cooked Powder Coated Paint.. 11. Thickness of Base plate for fixing 8 mm with 4 ribs. 12. Foundation reinforcement: Four M16 X 480mm J bolt interconnected with each other with 6mm rod.	No.	७५,०००
९	Treadmill 	1. Materials: Galvanized Mild steel pipes 2. Dimension: 1200mmx750mmx1400mm 3. Main frame rectangle pipe 80x40mm with thickness 3.5mm. 4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. Bearing holder 60mm pipe with thickness 4.5mm. 5. EN8.8 shaft of 16mm used with step of 15mm. 6. Permanent lubricated sealed 7. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety. 8. Paint: Electrostatic oven cooked Powder Coated 9. Thickness of Base plate for fixing 8 mm with 4 ribs. 10. 73Foundation reinforcement: Four M16 X 480mm J bolt interconnected with each other with 6mm rod	No.	६४,५००
१०	Thai Chi Spinner/Arm and shoulder wheel 	1. Materials: Galvanized Mild steel pipes 2. Dimension: 1370mmx890mmx1480mm 3. Main frame pipe 114mm with thickness 3.5mm. 4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. Bearing holder 60mm pipe with thickness 4.5mm. 5. Step EN8.8 shaft of 32mm used with step of 25mm. 6. Permanent lubricated sealed 7. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety. 8. Rubber handle cover with best grip. 9. Paint: Electrostatic oven cooked Powder 10. Thickness of Base plate for 8 mm. 11. Foundation reinforcement: Four M16 X 480mm J bolt interconnected with each other with 6mm rod.	No.	६४,०००
११	Leg extension (Stepper) and fitness rider cycle 	1. Materials: Galvanized Mild steel pipes 2. Dimension: 1700mmx550mmx1548mm 3. Main frame pipe 114mm with thickness 3.5mm. 4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. Bearing holder 60mm pipe with thickness 4.5mm. 5. Step EN8.8 shaft of 32mm used with step of 25mm. 6. Mild steel seat, foot cover and foot peddle with thickness 2mm on frame. 7. Permanent lubricated sealed 8. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety. 9. Paint: Electrostatic oven cooked Powder Coated Paint.. 10. Thickness of Base plate for fixing 8 mm with 4 ribs. 11. Foundation reinforcement: Four M16 X 480mm J bolt interconnected with each other with 6mm rod.	No.	६५,०००



 विभागीय प्रमुख
 प्रशासन विभाग

सि.नं.	Items	Specification	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१२	Horse Rider 	1. Materials: Galvanized Mild steel 2. Dimension: 1000mmx700mmx1000mm 3. Main frame pipe 114mm with thickness 3.5mm. 4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. Mild steel Flat of 50x10mm used. Bearing holder 60mm pipe with thickness 4.5mm. 5. Step EN8.8 shaft of 32mm used with step of 25mm. 6. Mild steel seat with thickness 2mm on frame. 7. Permanent lubricated sealed 8. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety. 9. Nylon stopper 1inch diameter 10. Rubber handle cover with best grip. 11. Paint: Paint: Electrostatic oven cooked Powder Coated Paint.. 12. Thickness of Base plate for fixing 8 mm with 4 ribs. 13. Foundation reinforcement: Four M16 X 480mm J bolt interconnected with each other with 6mm rod.	No.	६५,०००
१३	Double cross walker, Skier 	1. Materials: Galvanized Mild steel 2. Dimension: 1380mm x 570mm x 1620mm 3. Main frame rectangle pipe 80X40mm with thickness 3.5mm. 4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. Bearing holder 60mm pipe with thickness 4.5mm. 5. Step EN8.8 shaft of 32mm used with step of 25mm. 6. Mild steel foot cover with thickness 2mm on frame. 7. Permanent lubricated sealed 8. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety. 9. Rubber handle cover with best grip. 10. Paint: Electrostatic oven cooked Powder Coated Paint. 11. Thickness of Base plate for fixing 8 mm with 4 ribs. Foundation reinforcement: Four M16 X 480mm J bolt interconnected with each other with 6mm rod.	No.	८५,५००
१४	Triple Twister sitting and standing 	1. Materials: Galvanized Mild steel pipes 2. Dimension: 1680mmx1680mmx1348mm 3. Main frame pipe 114mm with thickness 3.5mm. 4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. Bearing holder 60mm pipe with thickness 4.5mm. 5. Twister plate of mild steel thickness 10mm. 6. Step EN8.8 shaft of 32mm used with step of 25mm. 7. Mild steel seat with thickness 2mm on frame. 8. Permanent lubricated sealed 9. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety. 10. Paint: Paint: Electrostatic oven cooked Powder Coated Paint. 11. Thickness of Base plate for fixing 8 mm with 4 ribs. Foundation reinforcement: Four M16 X 480mm J bolt interconnected with each other with 6mm rod.	No.	७५,०००
१५	Back Extension 	1. Materials: Galvanized Mild steel pipes 2. Dimension: 1000mmx550mmx500mm 3. Main frame rectangle pipe 80x40mm with thickness 3.5mm. 4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. 5. Mild steel seat and foot cover with thickness 2mm on frame. 6. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety. 7. Rubber handle cover with best grip. 8. Paint: Electrostatic oven cooked Powder Coated Paint. 9. Thickness of Base plate for fixing 8 mm with 4 ribs. Foundation reinforcement: Four M16 X 480mm J bolt interconnected with each other with 6mm rod.	No.	५७,०००


 विभागीय प्रमुख
 प्रशासन विभाग

सि.नं.	Items	Specification	Unit	आ.ब.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१६	Outdoor cycle 	1. Materials: Galvanized Mild steel pipes 2. Dimension: 1050mmx548mmx1470mm 3. Safe Play Area: 1.5 Meter x 1 Meter 4. Main frame pipe 114mm with thickness 3.5mm. 5. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. Bearing holder 60mm pipe with thickness 4.5mm. 6. Step EN8.8 shaft of 32mm used with step of 25mm. 7. Mild steel seat and foot peddle with thickness 2mm on frame. 8. Permanent lubricated sealed 9. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety. 10. Rubber handle cover with best grip. 11. Paint: Electrostatic oven cooked Powder Coated Paint. 12. Thickness of Base plate for fixing 8 mm with 4 ribs. Foundation reinforcement: Four M16 X 480mm J bolt interconnected with each other with 6mm rod.	No.	५३,०००
१७	Double Leg press 	1. Materials: Galvanized Mild steel pipe 2. Dimension: 1700mmx380mmx1550mm 3. Main frame pipe 114mm with thickness 3.5mm. 4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. Bearing holder 60mm pipe with thickness 4.5mm. 5. Step EN8.8 shaft of 32mm used with step of 25mm. 6. Mild steel seat and back seat with thickness 2mm on frame. 7. Permanent lubricated sealed 8. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety. 9. Paint: Electrostatic oven cooked Powder Coated Paint. 10. Thickness of Base plate for fixing 8 mm with 4 ribs. Foundation reinforcement: Four M16 X 480mm J bolt interconnected with each other with 6mm rod.	No.	६६,०००
१८	Weight lifter 	1. Materials: Galvanized Mild steel pipes 2. Dimension: 1625mmx448mmx2515mm 3. Main frame pipe 114mm with thickness 3.5mm 4. Handle frame 32mm and other frame 48mm pipe with thickness 3.5mm. 5. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety. 6. Paint: Electrostatic oven cooked Powder Coated Paint. 7. Thickness of Base plate for fixing 8 mm with 4 ribs. Foundation reinforcement: Four M16 X 480mm J bolt interconnected with each other with 6mm rod	No.	६५,०००
१९	Pull up, Dip station and leg lifter 	1. Materials: Galvanized Mild steel pipe 2. Dimension: 1.2mmx1mmx2100mm 3. Main frame pipe 114mm with thickness 3.5mm. 4. Handle frame 32mm pipe with thickness 3mm. 5. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety. 6. Rubber handle cover with best grip. 7. Paint: Electrostatic oven cooked Powder Coated Paint. 8. Thickness of Base plate for fixing 8 mm with 4 ribs. Foundation reinforcement: Four M16 X 480mm J bolt interconnected with each other with 6mm rod.	No.	६६,०००

प्रमुख
विभाग प्रमुख
विभाग

सि.नं.	Items	Specification	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
२०		1. Materials: Galvanized Mild steel pipe	No.	४६,०००
		2. Dimension: 2580mmx800mmx1600mm		
		Main frame pipe 114mm with thickness 3.5mm.		
		3. Handle frame 32mm pipe with thickness 3mm.		
		4. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety.		
		5. Paint: Electrostatic oven cooked Powder Coated Paint.		
		6. Thickness of Base plate for fixing 8 mm with 4 ribs.		
		Foundation reinforcement: Four M16 X 480mm J bolt interconnected with each other with 6mm rod.		
२१		1. Materials: Galvanized Mild steel pipe	No.	११०,०००
		2. Dimension: 8500mmx1800mmx1800mm		
		3. Main frame pipe 114mm with thickness 3.5mm.		
		4. Handle frame 32mm pipe with thickness 3mm.		
		5. All open ends of pipe either sealed in or closed by MS/LLDPE cap for user safety.		
		6. Paint: Electrostatic oven cooked Powder Coated Paint.		
		7. Thickness of Base plate for fixing 8 mm with 4 ribs.		
		Foundation reinforcement: Four M16 X 480mm J bolt interconnected with each other with 6mm rod.		

विपद व्यवस्थापन सम्बन्धी सामग्री

S.N.	Equipment Details	Specification	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१		Fire Fighting Jacket Size: (48 to 52 C) Medium, Short (as per requirement) Body height: 120 to 150 cm (as per requirement) PIONEER/TITAN 1220/NOMEX Tough /Nomex NXT/PBI XT Kanox fire retardant fabric not less than 195 g/m³ Moisture barriers liner water and windproof, breathable. Safety thermal lining with insulating layer in a 100% aramid nonwoven and aramid/ viscose quilting, approx. 270 g/m³ Arm and jacket with moisture blocker made of flame-retardant PU coated fabric. Sleeve construction with mobility wedge High resistance Zipper with double cover flap Additional reinforcement at elbow and shoulders made of flame-retardant fabric; Flame protection Collar Sleeve width with adjustable to hook and pile fastener. Sleeve with NOMEX/PBI/KANOX knitted wristlet with thumb hole; Radio pocket both side; Two side Pocket with flap Lamp holder on front cover (15 x 2.5) cm fleece strip for attaching name strip above left radio pocket; Reflective stripes around waist and both sleeve; Backside length: (85 to 90) cm) Fire Fighting Trousers Size: Waist (30" to 36"), (as per requirements) Body height: (164 to 172) cm (as per requirements) Certification: EN 469, EN 1149 or equivalent Outer fabric: NOMEX/PBI/PIONEER/KANOX Trousers with adjustable, non-detachable approx. 3.8 cm wide suspenders Adjustable elastic straps for fixing with waist band individually; Belt loops for using belt Fly with zipper and hook and pile fastener, covered by flap Two side pockets with flap Trousers with moisture blocker of flame-retardant PU coated aramid Reinforcement at the knees, on the cuffs and interior-seams of pants made of flame-retardant silicon-carbon coated fabric Fix mounted padding under the knee protection. Reflective stripes around legs Color: Dark Blue Minimum five-year guaranty certificate Certification: EN443, PR EN 16471/3, ISO 16073 or equivalent	pcs	१००,०००

प्रमुख प्रशासकीय अधिकृत

मुक्तिराम अर्याल
प्रमुख प्रशासकीय अधिकृत

S.N.	Equipment Details	Specification	Unit	आ.ब.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
२	Fire Boot 	Certification: EN 15090 or equivalent ; Ankle protector Hydrophobic waterproof leather Lined with waterproof breathable membrane High grade laminate lining with foamed material, highly abrasion resistance 3M reflective material, made of heat-retardant material Ankle-Zone stiffening ; Joint supportive leather heel insert Steel toe cap /composite toe cap High tenacity insole ;Nitrile outsole Rubber toe cap ,BOA lacing system Reflex-element as sight able areas Size: (41 to 43) cm EU ; Height: 28 cm approx. Weight: 2.7 kg max. (1 pair) Replacement coiler and lace: 2/2 per pairs Minimum five year guaranty certificate	pcs	८८,०००
३	Fire helmet 	Helmet type: Full shell Size adjustment form outside ; Size:(51 to 65) cm Face Shield: As per EN 14458or equivalent Eye Protection visor ; Neck protector All around neck protector Edge protector with leather chin guard Integrated torch holder, Helmet Torch System: LED explosion proof with AAA batteries and holder. ; Integrated mask adaptor. Comfort Padding chin strap ; Leather lining Heat radiation: Min. 8 minutes, 14 KW/m2 ≥ 3000C helmet temp. Cleaning spray: 5 per set Shock absorption: Hemispherical striker, 5 kg foam a height of 2.5 m, in heated condition > 3000C helmet temp., Force transmitted to heat < 15 KN Penetration resistance: Flat blade striker, 1kg foam height of 2 m, in heated condition > 3000C helmet temp. Flame engulfment: 1000 OC/10 sec, no after burning >5 sec, no dripping ; Helmet carrying bag Color: Orange/Red/Yellow Minimum five year guaranty certificate	pcs	१५०,०००
४	Fire Gloves 	Palme side: silicon carbon mineral coated Flexible wristlet adjustment Certification : EN 659, Gore-Tex X-TRAFIT technologies or equivalent Pleats on the finger Adjustable hook and pile fastening Polyurthane protector on hands' back with heat insulation Cuff with reflective stripes. Abrasion, Cut, Tear, Puncture resistant EN 388or equivalent. Heat resistant EN 367 ISO 6942 or equivalent Contact heat resistant EN 702 or equivalent Dexterity EN 420 or equivalent Waterproofing, wind proofing, and breathability. Color: Dark blue Minimum five year guaranty certificate	pcs	३१,०००
५	Smoke Detector 	Detection Method: Ionization (fast-flaming fires) or Photoelectric (slow-smoldering fires); many modern units combine both Power Source:Battery (9V, AA, or sealed lithium) or hardwired with battery backup Alarm Sound: 85-120 dB siren, often with voice alerts Test/Reset Button:Manual button for functionality checks Interconnectivity:Some models link multiple detectors so all alarms trigger together Smart Features: Wi-Fi or Bluetooth connectivity, app alerts, integration with smart home systems Durability:Typically lasts 8-10 years before replacement is required Certifications:UL-listed or equivalent safety standards	pcs	३,५००
६	Fire Blanket 	Made with fire resistant materials Meet EN 1869:1997 standard Packed into hard case plastic. Quick release strips Size minimum 1.7m x 1.7m Certifications: ISO/CE/Equivalent	pcs	३,२००
७	Fire Extinguisher ABC Type(Small) 	Capacity: Min. 2 KG Cylinder: Alloy steel, deep drawing, with clip, epoxy polyester powder painting, RED Extinguishing Agent: ABC Powder Min. MAP 40 % Propellant: Dehumidified air/Nitrogen Fire Rating: Min. 21 A, 144 B Working Pressure: Min. 14 Bar Test Pressure: Min. 35 Bar Discharge Range: Min. 5 Mtr Use ABC Fire rating (Solid Materials, flammable liquids, flammable gas etc.) Discharge mechanism: Squeeze grip/thumb triggered Bracket: Wall mounted for valve in standard equipment Certification/s: ISO, EN-3/PED or Equivalent Warranty: Min. 1 year	pcs	२,०००

प्रमुख प्रशासकीय अधिकृत
विमानन विभाग

मुक्तिराम अर्याल
प्रमुख प्रशासकीय अधिकृत


S.N.	Equipment Details	Specification	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
८	Fire Extinguisher ABC Type(Small) 	Capacity: Min. 4 KG Cylinder: Alloy steel, deep drawing, with clip, epoxy polyester powder painting, RED Extinguishing Agent: ABC Powder Min. MAP 40 % Propellant: Dehumidified air/Nitrogen Fire Rating: Min. 21 A, 144 B Working Pressure: Min. 14 Bar Test Pressure: Min. 35 Bar Discharge Range: Min. 5 Mtr Use ABC Fire rating (Solid Materials, flammable liquids, flammable gas etc.) Discharge mechanism: Squeeze grip/thumb triggered Bracket: Wall mounted for valve in standard equipment Certification/s: ISO, EN-3/PED or Equivalent Warranty: Min. 1 year	pcs	२,५००
९	Fire Extinguisher ABC Type(Small) 	Capacity: Min. 6 KG Cylinder: Alloy steel, deep drawing, with clip, epoxy polyester powder painting, RED Extinguishing Agent: ABC Powder Min. MAP 40 % Propellant: Dehumidified air/Nitrogen Fire Rating: Min. 21 A, 144 B Working Pressure: Min. 14 Bar Test Pressure: Min. 35 Bar Discharge Range: Min. 5 Mtr Use ABC Fire rating (Solid Materials, flammable liquids, flammable gas etc.) Discharge mechanism: Squeeze grip/thumb triggered Bracket: Wall mounted for valve in standard equipment Certification/s: ISO, EN-3/PED or Equivalent Warranty: Min. 1 year	pcs	३,०००
१०	Fire Extinguisher ABC Type(Small) 	Capacity: Min. 9 KG Cylinder: Alloy steel, deep drawing, with clip, epoxy polyester powder painting, RED Extinguishing Agent: ABC Powder Min. MAP 40 % Propellant: Dehumidified air/Nitrogen Fire Rating: Min. 21 A, 144 B Working Pressure: Min. 14 Bar Test Pressure: Min. 35 Bar Discharge Range: Min. 5 Mtr Use ABC Fire rating (Solid Materials, flammable liquids, flammable gas etc.) Discharge mechanism: Squeeze grip/thumb triggered Bracket: Wall mounted for valve in standard equipment Certification/s: ISO, EN-3/PED or Equivalent Warranty: Min. 1 year	pcs	४,५००
११	Fire Extinguisher ABC Type(50 kg) 	Capacity: 50 kg dry chemical powder capacity. Suitable for large-scale fire hazards. Extinguishing Agent: Mono Ammonium Phosphate (MAP) powder. Effective against wood, paper, textiles, petrol, oil, and electrical fires. Cylinder & Trolley: Heavy-duty steel cylinder with corrosion-resistant coating Mounted on two-wheel trolley for mobility. Equipped with hose and nozzle for directional discharge. Discharge System: High-pressure discharge valve with squeeze grip. Hose length: Min 5 meters for flexible operation. Discharge time: Min. 60 seconds. Range: Min 6 meters. Safety Features: Pressure gauge for readiness check. Safety pin & tamper seal. Easy refilling and servicing Working Temperature: At Least -30 to + 60 Degree Celcius Filled with dry powder (Applicable for ABC Types) Certification: CE/ EN/ NFPA or Equivalent Warranty : Min 2 years	pcs	५०,०००
१२	Fire Ball 	Weight: 1.3 ± 0.2 Kgs. The materials and chemicals of the ball shall not be harmful to human and environment. Life ≥ 5 years The Concentration of Chemical inside shall be ≥ 90 % The ball shall be activated automatically ≤ 5-10 seconds when touched to the flame. Effective extinguish area of the ball shall be ≥ 5.4 Square Mtr. Sound : Max 140 dB Fire Rating: 1 A, 5 B & C Certification/s: ISO/CE/ UL (Powder) or Equivalent	pcs	३,५००

२४/१२/२०२०
विमानवाय प्रमुख
प्रशासन विभाग

मुक्तिराम अर्याल
प्रमुख प्रशासकीय अधिकृत

S.N.	Equipment Details	Specification	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१३	Portable fire Pumps(Small) 	Type: 1st Stage Centrifugal Pump must be especially designed for firefighting Engine: Made : Engine Must be from reputed brands Type: 4 Stroke ; Fuel Type: Gasoline ; Primer: Manual Compatibility : Water and Foam ; Fuel Consumption: Max. 1 Lit/hr Fuel Tank Capacity: Min. 80 % of fuel consumption capacity Starting: Manual / Electric / Both ; Dry Weight: Max. 9 KG (+10% Tolerable) ; Flow Rate (-10 % Tolerable) ; At 1 Bar Min. 250 L/M ; At 2 Bar Min. 200 L/M ; At 3 Bar Min. 150 L/M ; Certification/s: CE EN/NFPA and ISO or Equivalent Warranty: Min 1 year ; Document/s required during the bid submission/ Authorization letter from OEM/National Distributor, certificate/s and catalog Accessories Selectable Gallonage Nozzle (1 Piece) The diffuser branch pipe should be Fog and stream jet type. The body material of the branch pipe should be hard anodized aluminum alloy. The diffuser branch pipe should have at least 4 flow rate selection features to be controlled by swiveling ring piston. The Max. flow rate of the branch pipe @ 6-7 bar pressure should be min. 495 LPM ; The Max. work pressure and test pressure of the branch pipe should be min. 15 & 22 bar respectively. The weight of the branch pipe should be 1.7 ± 0.2 KG. The screws and axles of the branch pipe should be made from SS. Swivel inlet coupling of the branch pipe must be exactly 1.5". The coupling of the pump should BSP Thread type. The branch pipe should have effective reach capacity to min. 32 Mtr (at 6-7 bar, min. 495 LPM) ; Delivery Hose (1 Piece) The fire hose must be very sturdy, durable, resistant to oil, petrol and chemicals, heat and waterproof. The working temperature of the fire hose should be ≤ -25°C to ≥ +100°C. ; The fire hose should be in 3 layers design The reinforcement of the hose must be made from polyester filament ; The cover and Tube of the fire hose must be made from nitrile rubber/TPR. The length of the fire hose must be min. 30 Mtr. The inlet dia mtr of the fire hose should be 1.5". The fire hose must be coupled by 1.5" BSP Thread male and female couplers made from high strength aluminum alloy The hose and coupling should be joined by high strength steel rope with ≥ 1.6mm thickness. The burst and test pressure of the hose must be min. 16 bar and 48 bar respectively. 1.5 inch BSP Thread male Front Valve / 1 Piece)	pcs	१५५,०००
१४	Backpack Fire Pump 	The pump nozzle with hose connection, filling cap, harness belt shall be the integral part of the back pack pump set. Capacity 20-25 ltrs The back pack pump shall be 3 layers (1 layer cver and 2 layers for inside water tank) The cover material of the pump shall be made from ballistic Nylon /1000 Cordura /better material. Collapsible inside water tank shall be made from a special fabric lined with PVC	pcs	१६,०००
१५	Life Jacket 	Type & Profile: V, high profile with head rest (Coast Guard Type) Design Flotation: 100 N Min. Outer Fabric: 500-diner high tenacity nylon outer shell fabric Closer system: Front zip and Buckle Pockets: 2 min. Adjustment System: 8 adjustment points (4 - Side, 2 - Shoulder, 2 - Waist) Includes: Reflective tape, Quick release rescue harness, Strobe holder, Tether attachment point, Safety light stick holder, Webbing loops for leg straps Features: Universal Plus fit 32" - 58" chest Nylon webbing with PP plastic buckle Color: Red/Orange Minimum Five years guaranty with tested certificate document Coast Guard Certification Certified and Tested document Guaranty Certificate document of company	pcs	१५,०००
१६	Life Bouy 	Material: HDPE Operating Temperature: -30 Degree Celsius to + 65 Degree Celsius or Wider Drop Height: Not less Than 78 m. Weight: (2.5± 0.1) kg Buoyancy: (14.5 ± 0.5) kg Outside Dia.Mtr: (27 ± 3) Inch Other Features: DiaMtr of Handle rope should be at least 9.5 mm, There shall be at least 4 reflective tapes on the Shell of the ring buoy Certification/s: CE/ SOLAS 1974 or Equivalent Color: Orange Warranty: Min. 1 year/s	pcs	११,०००
१७	Lifeline 	Material: Strong braided nylon or polypropylene rope. Length: typically 30-50 meters, depending on dive depth. Resistant to abrasion, saltwater, and UV exposure. Attachment Points: Secured to diver's harness or belt. Surface end tied to a fixed point or held by a tender Safety Features: High-visibility rope (bright orange/yellow). Non-slip gloves for handling Quick-release attachment for diver safety.	pcs	१९,०००
१८	Safety Helmet 	Material: High-density ABS or polycarbonate Weight: 350-450 g Suspension system: 6-point adjustable harness Chin strap 3-point or 4-point with quick release Visor Transparent polycarbonate, anti-scratch Lighting mount Front clip or side rail Communication port Optional integrated headset Color Fluorescent yellow, orange, or red Standards EN397, IS2925, ANSI Z89.1	pcs	८,५००

प्रमुख प्रशासकीय अधिकृत

S.N.	Equipment Details	Specification	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१९	Knee Pad 	Material: EVA foam, gel, rubber, or hard plastic Outer shell: Polycarbonate or PVC Straps: Elastic, Velcro, or buckle Padding thickness 10-25 mm ; Weight: 200-600 g per pair Standards: EN 14404 (work safety), ASTM standards	pcs	३,६९६
२०	Gum/Water Boot 	Material: Natural rubber, PVC, neoprene Height: Ankle, mid-calf, knee-high Sole type: Anti-slip, steel-toe, puncture-resistant Insulation: Thermal lining or neoprene Weight: 1.5-3 kg per pair Standards: EN ISO 20345/ ASTM standards	pcs	३,५००
२१	Dust Mask 	Material: Non-woven fabric, polypropylene Filter type: N95, N99, FFP1-FFP3 Straps: Elastic or adjustable Valve option: With or without exhalation valve Fit design: Cup-shaped or fold-flat Standards: NIOSH, EN 149	pcs	५२०
२२	Safety Goggles 	Lens material: Polycarbonate, acrylic Coating: Anti-fog, anti-scratch Ventilation: Direct, indirect, or sealed ; Straps: Elastic or adjustable ; Compatibility: Fits with helmets or respirators Standards: ANSI Z87.1, EN 166	pcs	३,०००
२३	Reflective Vest 	Material: Polyester mesh or solid fabric Color: Fluorescent yellow, orange, or green Reflective strips: 2-4 inch silver reflective tape Closure type: Zipper, Velcro, or snap Pockets: Multiple utility pockets Standards: CE, ISO or Equivalent	pcs	३,९६४
२४	Petrol Chain saw 	Engine Displacement: Min. 45 cc ; Engine Power: Min. 1.8 KW ; Engine Power Speed: Min. 3000 rpm Guide Bar Length: Min. 450 mm ; Fuel Tank: Min. 0.45 ltrs Sound Pressure Level 2: Max. 114 dB(A) Engine type: 2 strokes ; Weight: Max. 8 ± 0.5 kg Certification/s: ISO/CE or Equivalent ; Warranty: Min. 1 year Accessories: Chain cover, fuel measuring cane, spark plug oil filter, 5 pieces of extra chain and tool kit set must be included	pcs	६०,०००
२५	Electric Chain Saw 	Chain Speed: Min. 2,900 RPM ; Guide Bar Length: Min. 16" Pitch: Min. 3/8" ; Gauge: Min. 0.050" Voltage: 220-240v ; Power: Min. 1800Watt Oil Tank Capacity: Min. 6.8 oz. ; Overall Length: Min. 19-7/8" Net Weight (w/o bar & chain): Max. 12.3 lbs. Power Type: Corded ; Cord length: Min. 5 m Guide Bar: Min. 16" ; Chain cover Saw Chain 5 set in each set of equipment Tools kit set ; Rubberized grip ; Large trigger switch with soft start ; Large oil reservoir with view window Automatic chain oiler for heavy continuous cutting Electric chain brake for maximum productivity Soft start for smooth start-ups ; Certification: ISO/CE Minimum Five years guaranty ; Certified and Tested document Guaranty Certificate document of company	pcs	४०,६५०
२५	Rotary rescue saw 	Engine Displacement : Min. 73 cc Engine (power): Min. 4 HP/3 kW ; Engine: Min. 75 ml No Load Speed/Max. Spindle Speed: Min. 9,100 / 4,300 RPM Circumferential speed: Min. 80 m/s ; Fuel Type: Unleaded gas Fuel Tank Capacity: Min. 37 oz./1000 ml Arbor w/ Adaptor: Min. 20mm/1" adaptor Cutting Depth: Min. 97 mm (4-13/16") ; Dry Weight: Max. 28.3 lbs. ; Product Length (in.): Min. 30-3/4" Product Height (in.): Min. 17.875" ; Product Width (in.): Min. 12.25" ; Wheel Diameter (in.): Min. 14"/355 mm User Type: Professional ; Power Type: 4-stroke gas Overall Length: Min. 30-3/4" ; Power Tool Product Type: Other Overall dimensions: 780 ± 15mm ; Net weight: Max. 12.2kg ; Tool kit set 14" Diamond blade general purpose, Laser welded, Superior quality steel core, Optimum bond matrix, five pcs per set of power cutter 14" Diamond blade for Metal cutting blade, Diamond coated segments, premium steel core, Diamonds vacuum brazed, high quality diamonds for cutting rebar, angle iron, metal studs and more, five pcs per set of power cutter Abrasive Cut-Off Wheel blade, Brown Fused Aluminum, A36P, five pcs per set of power cutter Water attachment ; Automatic engine decompression valve Pressure compensated carburetor with vented choke plate Integrated all aluminum wheels Five-stage, foam-paper-nylon filtration system with advance direction air flow ; fuel consumption Max. 0.50 gallons per hour Three ring pistons ; Clear primer bulb facilitates fuel delivery Advanced oil separation and lubrication system Specially treated rods, followers and valves Single lever On-Off-Choke operation switch Shielded exhaust outlet and larger spark arrestor screen External fuel tank vent Sealed cartridge recoil starter ; Cushioned operator grips with 4 vibration-absorption rubber buffers, Convenient oil level, Easy access carburetor, Replaceable tank fuel filter, Included water kit with quick release attachment Minimum Five years Life	pcs	२६५,५५०

प्रमुख प्रशासकीय अधिकृत

मुक्तिराम अर्वाल
प्रमुख प्रशासकीय अधिकृत

S.N.	Equipment Details	Specification	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
२६	Portable Generator 	Engine Rating or Max. power at rated RPM in KW: Min 6 Engine Type: Air Cooled No of cylinder: one Engine Type: 4 Stroke Displacement(L): Min 0.51mm Bore and stroke (mm) : Min 85*90 Compression Ratio: 18:1 Electric System Frequency: 50 Hz Rated Voltage: 220-240 volt Ac, single phase Battery Voltage: Min 12 volt Battery capacity: Min 35 Ah Fuel Tank Capacity: Min 8 ltrs Start: Electric/Recoil Fuel Consumption: Full load Max 2 liters	pcs	१८५,०००
२७	Scene Tape 	Material :- Polyethylene (LDPE or HDPE), non-adhesive Thickness :- Standard: 2 mil (professional grade) Width :- 3 inches Roll Length :- 500 ft or 1000 ft Color :- Bright yellow (high opacity, no see-through) Text :- Bold black lettering, e.g. "DO NOT CROSS" Core Size :- 3-inch cardboard core (dispenser compatible) Durability :- Weather-proof, UV-treated, resistant to tearing and stretching	pcs	५००
२८	Safety Cone 	Material PVC or rubber (flexible, impact-resistant) Height Standard: 28" to 36" Base Wide, weighted base for stability Color Bright orange (sometimes yellow or red) Reflective Bands White or silver for nighttime visibility Weight: 3-10 lbs depending on size Durability UV-resistant, weather-proof, crush-resistant Use Cases Traffic control, accident scenes, construction, crowd management	pcs	१,५००
२९	Bolt Cutter 	Length: 30"-36" Blade material: Cr-Mo steel Handle: rubberized gripped/ Heavy Duty Vinyl Grips Document/s required during the bid submission: Catalogue Warranty: Min. 1 year/s ISO /CE Certified or Equivalent	pcs	१,३००
३०	Marking Spray 	Colors Fluorescent orange, yellow, pink, green, blue, white Finish Matte, quick-drying Durability Lasts 2-4 weeks outdoors (weather-dependent) Can Size 12-20 oz aerosol cans Application Inverted spray tip for downward marking Surface Compatibility Grass, soil, gravel, asphalt, concrete, wood Safety Non-clogging, low-VOC, often water-based options	pcs	१,२४३
३१	Megaphone 	Material Plastic body with metal or rubber components Power Source Battery-operated (AA, rechargeable packs) Range 200-800 meters depending on model Output Power 5-50 watts Functions Voice amplification, siren/alarm mode Handle Ergonomic grip with trigger button Weight 1-3 kg for portable models	pcs	५,०००
३२	Dead Body Bag 	Material: PEVA/PVC Color: white, black Size: 210x80cm, 210x90cm or customized. Thickness: 0.2mm, 0.25mm or customized. Handle: with 6 braided strap handles/without handle Zipper: U shape zipper or straight zipper.	pcs	५,०००
३३	Satellite Phone 	Network Type Satellite networks such as Iridium Communications, Inmarsat, and Globalstar Coverage Regional to global, depending on the satellite provider Voice Services Standard voice calling over satellite links Messaging SMS and sometimes email support Data Speed Typically 2.4 kbps-704 kbps; much slower than modern cellular networks Battery Life Usually 4-8 hours talk time, 30-100+ hours standby GPS/GNSS Often includes GPS location tracking and emergency coordinates Emergency Features SOS button, emergency messaging, location sharing Operating Temperature Typically -20°C to +55°C (varies by model) Ingress Protection Many models offer dust and water resistance (e.g., IP65 or IP67) Weight Approximately 200-350 grams Antenna External or deployable high-gain antenna required for satellite connection Display Monochrome or color LCD, usually optimized for outdoor use	pcs	१९५,०००
३४	Tarpaulin 	HDPE Waterproof Tarapaulin Sheet, minimum 200GSM, UV Stabilized, double-side PE laminated, waterproof, high tear strength, reinforced edges with rust-resistant, Size: 12ft*18ft	pcs	३,२४०

०८/१२/२०२४
 विमानन विभाग
 आवासन विभाग

प्रतिकारम अर्थात्
 प्रमुख प्रशासकीय अधिकृत

S.N.	Equipment Details	Specification	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
३५	Tarpaulin	HDPE Waterproof Tarapaulin Sheet, minimum 200GSM, UV Stabilized, double-side PE laminated, waterproof, high tear strength, reinforced edges with rust-resistant, Size: 15ft*18ft	pcs	४,०५०
३६	Tarpaulin	HDPE Waterproof Tarapaulin Sheet, minimum 200GSM, UV Stabilized, double-side PE laminated, waterproof, high tear strength, reinforced edges with rust-resistant, Size: 18ft*24ft	pcs	६,४८०
३७	Tarpaulin	HDPE Waterproof Tarapaulin Sheet, minimum 200GSM, UV Stabilized, double-side PE laminated, waterproof, high tear strength, reinforced edges with rust-resistant, Size: 24ft*36ft	pcs	१२,९६०
३८	Fire Extinguisher Refilling (DCP /ABC Type)	2 kg capacity, monoammonium Phosphate chemical	थान	१,३००
३९	Fire Extinguisher Refilling (DCP /ABC Type)	4 kg capacity, monoammonium Phosphate chemical	थान	१,८००
४०	Fire Extinguisher Refilling (DCP /ABC Type)	6 kg capacity, monoammonium Phosphate chemical	थान	२,२००
४१	Fire Extinguisher Refilling (DCP /ABC Type)	9 kg capacity, monoammonium Phosphate chemical	थान	२,८००
४२	Fire Extinguisher Refilling (DCP /ABC Type)	50 kg capacity, monoammonium Phosphate chemical	थान	१४,०००
४३	Fire Extinguisher Refilling (Foam Type)	9 ltr Capacity, Aluminium Sulphate and Sodium bicarbonate chemical	थान	२,४००
४४	Fire Extinguisher Refilling (CO2 Type)	2 kg capacity, carbondioxide chemical	थान	३,५००
४५	Fire Extinguisher Refilling (CO2 Type)	5 kg capacity, carbondioxide chemical	थान	५,०५०
४६	Fire Extinguisher Refilling (CO2 Type)	9 kg capacity, carbondioxide chemical	थान	९,५००
४७	Fire Extinguisher New Tank (Foam Type)	9 ltr Capacity, Aluminium Sulphate and Sodium bicarbonate chemical	थान	५,५००
४८	Fire Extinguisher New Tank (CO2 Type)	2 kg: Carbon dioxide (CO ₂); suitable for Class B & energized electrical equipment; seamless steel/aluminium cylinder suitable for CO ₂ service; approved CO ₂ valve; insulated discharge horn/nozzle; non-conductive, residue-free agent; high-pressure compatible hose where applicable; safety pin & tamper seal; ANSI/UL 154 or EN/ISO equivalent; UL 711 or equivalent fire rating; heavy-duty wall bracket; permanent operating instructions.	थान	६,५००
४९	Fire Extinguisher New Tank (CO2 Type)	5 kg: Carbon dioxide (CO ₂); suitable for Class B & energized electrical equipment; seamless steel/aluminium cylinder suitable for CO ₂ service; approved CO ₂ valve; insulated discharge horn/nozzle; non-conductive, residue-free agent; high-pressure compatible hose where applicable; safety pin & tamper seal; ANSI/UL 154 or EN/ISO equivalent; UL 711 or equivalent fire rating; heavy-duty wall bracket; permanent operating instructions.	थान	९,५००
५०	Head torch	LED High End Power Led, lumens:5000LM, rechargeable with charger	थान	१,८००

Medical and Lab Equipment

SN	Items	Specification	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१	Pulse Oximeter	SpO ₂ detection includes the range: 70 - 100%Data display update rate: every 1s Operated by rechargeable battery power supply.	Pcs	२०००
२	Sphygmamometer (BP apparatus)	Composed of a cuff containing an inflatable bag Length tube between: 50 to 70 cm Gauge graduated 0 - 300mmHg (min) in 2 (max) mmHg increments, with pressure release valve. Accuracy as per ISO 81060-1: +/- 3mm Hg Latex and mercury free design.	Pcs	२२००
३	Stethoscope	Tube diameter: outer diameter 10mm, inner diameter 4.8mm. Tube length 560mm Sensitivity from 3.2dB to 26dB in a range from 50 to 1000Hz for cardiology.Sensitivity 8.1dB in a range from 600 Hz to 1,500Hz for pneumology Arms: brass-steel with a flexible spring. Removable plastic earpieces. Latex-free.	Pcs	१०००

महोदय
विभागीय प्रमुख
प्रशासन विभाग

मुक्तिराम अर्वाल
प्रमुख प्रशासकीय अधिकृत

SN	Items	Specification	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
४	Examination Table(Fixed Height)	Examination tabel, two sections extended, including upholstery: (185-190) x 55 x 80cm (l*wx h). Frame: 3 cm (outside, across), 1.35-1.5 mm thickness. Upholstery: 4.5-5 cm (h). Carrying capacity: minimum 160 kg. Knockdown construction: yes.	Pcs	७५००
५	Otoscope Set	Handle with a built-in LED light source in a mounted head. Including rotatable viewing lens with a magnification between 3 times. Colour temperature: Cool white in the range 3,200-4,000K. Including reusable, autoclavable specula. Specula are cleanable with alcohol wipes Handle contains on/off switch. Includes a port to connect an insufflation bulb. Uses 2 x type AA Alkaline batteries as a power source.	Pcs	४,५००
६	Dressing Trolley	Overall: (81-90) x (50-55) x (90-100) cm (l*w*h) Frame: 2.7-3.3 cm (outside, across), 1.5 mm thickness Thickness shelves: 1.35-1.5mm Swivel castor wheel: 3 x 10 cm (w*diameter) Carrying capacity: 100 kg	Pcs	१३,५००
७	Scale with Height Measuring (Digital)	high 300 kg capacity. built in height rod 61 cm-250 cm with 1cm increments. large easy to read LCD display. AC/DC adaptor and battery operation. battery life up to 100hrs continuous use. BMI function. step-on activation. large and ultra-low profile platform.	Pcs	४५,०००
८	Nebulizer	For compressor model: air flow at least 5 L/min. Minimum drug nebulisation flow greater than: 0.2 ml/min. Integrated drug reservoir with a minimum capacity: 6 ml.	Pcs	२,५००
९	Artery Forcep	• Straight Artery forceps • Made up of stainless steel • Approx. 160 cm	Pcs	२००
१०	Cheattle forcep with Jar	• Cheattle forceps 10 Inch With Cheattle Jar • Made up of stainless steel.	Pcs	१,२५०
११	Digital Thermometer	• Power Source: Battery • With LCD Display • Temperature in °C and °F • Should come with Safety Case, • Automatic shut-off, • Auto Shut OFF	Pcs	३५०
१२	Disposable wooden tongue depressor,	• Made up of wood with smooth texture • Tasteless and order less • Should come in pack of 100 pcs	Pkt	१५०
१३	Duck Speculum	• Made up of stainless steel • Size: 80*32mm, 90*37mm and 115*37mm	Pcs	६००
१४	Examination Lamp	• Height approx.: 100cm with approx. 75cm articulating arm. • Operating voltage: 220V-240V • Light Source: LED or incandescent bulb	Pcs	७,५००
१५	Fetoscope	• Made up of stainless steel or aluminium • Diameter 2 cm and length 30 cm	Pcs	२५०
१६	Flash light/Torch Light	• LED light • AA battery operated • Approx. 10 cm length	Pcs	३५०
१७	Footstep	• Double step • Made up of mild steel/ SS	Pcs	३,५००
१८	Gauze Drum	• Stainless steel drum • Approx size: 5"*12"	Pcs	१,८००
१९	Kidney Tray	• Set of 4 stainless steel kidney tray • Size 6", 8", 10" and 12"	Pcs	५००
२०	Knee Jerk hammer	• Should come with triangular rubber head and flat stainless-steel handle • Size: approx. 12"	Pcs	३५०
२१	Mackintosh Sheet	• Made of High Quality Natural Rubber • Soft & High quality Breaking & Tearing Strength • Size: Approx. 36"*84"	Pcs	३५०
	Pillow With Cover	• Waterproof pillow with cover • Approx. size: 16"*22"	Pcs	७५०

SN	Items	Specification	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
२३	Protoscope	• Made up of stainless steel • Size: Medium	Pcs	१,२५०
२४	Scissors	• Made up of Stainless steel • Size: ८" and १२"	Pcs	५५०
२५	Screen	• Movable 3 fold folding screen • Size: approx. ८'*५' • Frame made of Stainless steel or high strength mild steel	Pcs	६,०००
२६	Snellen's chart	• SNELLEN eye chart for visual acuity and vision test • Size: Approx. २३ x ३५.५ cm	Pcs	९५०
२७	Speculam	• Made up of stainless steel material • Size: Medium	Pcs	६००
२८	Tooth forcep	Stainless Still ८"	Pcs	२००
२९	Artery forcep	Stainless Still ८"	Pcs	२५०
३०	Sponge holding forceps	Stainless Still ८"	Pcs	४५०
३१	Artery forceps, curved	Stainless Still ८"	Pcs	१८०
३२	Needle holder-	Stainless Still ६"	Pcs	१८०
३३	Suture cutting scissor	Stainless Still ६"	Pcs	३५०
३४	Stop watch /Timer	• Timer with LCD display	Pcs	६५०
३५	Surgical drum	• Stainless steel drum • Approx size: १५"*१२"	Pcs	६,०००
३६	Tape to measure fundal height	• १०० cm long	Pcs	५०
३७	Tray with cover	• Stainless steel tray of approx. २०*२५*२ CM	Pcs	७५०
३८	Tuning fork	• २५६ Hz for for medical and hearing testing	Pcs	३५०
३९	Eye Towel	३६"x३६" with opening at center about ३" diameter	Pcs	२५०
४०	Wrapper	३६*३६	Pcs	२५०
४१	Yoga Mat Deluxe	२*६ fit(Non-slip on both sides to enhance user safety. Comfortable cushioning without excessive compression. Resistant to cracking, peeling, and deformation during normal use. Uniform thickness and smooth finish throughout the mat. Manufactured from durable, skin-friendly, and eco-friendly materials)	Pcs	१,०५०
४२	USG Jel	५ ltr	Jar	७५०
४३	Medical Masking Tape	२*५ meter	Roll	५०
४४	Colour Coded Dust Bin with Cover	५० Ltr(Tight-fitting lid Color-coded waste bag (matching bin color) Waste identification label Biohazard symbol (for infectious waste bins) User instruction label (optional)	Pcs	३,६२५
४५	Colour Coded Dust Bin with Cover	३० Ltr(Tight-fitting lid Color-coded waste bag (matching bin color) Waste identification label Biohazard symbol (for infectious waste bins) User instruction label (optional)	Pcs	२,५००
४६	Colour Coded Dust Bin with Cover	२० Ltr(Tight-fitting lid Color-coded waste bag (matching bin color) Waste identification label Biohazard symbol (for infectious waste bins) User instruction label (optional)	Pcs	२,१२५
४७	Transparency Sheet	A4 Size Plastic Paper	Pcs	२०
४८	Medical Bed Sheet	१ Mtr* २ Mtr	Pcs	७५०
४९	Baltin with Cover	२० Ltr	Pcs	१,५००
५०	Baltin with Cover	१०Ltr	Pcs	१,१५०
५१	Mattress	३ feetx ६ feet ३"	Pcs	५,०००
५२	Aprone	Pcs	Pcs	४५०
५३	Autoclave Rod	Compatible with Autoclave(२०Ltr)	Pcs	९००
५४	Autoclave Rod	Compatible with Autoclave(३०Ltr)	Pcs	१,१००
५५	Autoclave Rod	Compatible with Autoclave(५०Ltr)	Pcs	१,५००
५६	Autoclave Rod	Compatible with Autoclave(८०Ltr)	Pcs	४,५००

SN	Items	Specification	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
५७	Surgical Mask	Three layer latex free medical surgical mask BFE 98.0% PFE 99.3%	Pcs	३
५८	Improved Neubauer Counting Chamber	Thick glass plate with size of a glass slide(30*70*4mm), grid design: 9mm2, chamber depth: 0.1mm	Pcs	२,५००
५९	Cover slip for microscopy	Microscope cover glass, square, size 22mm*22mm 20/pack One box	Box	२,५००
६०	Glass slides	Plain, flat, corrosion-resistant, untreated surface glass slide (borosilicate or soda-lime), Ground edges, 75X25 mm, 1mm thickness with shatter-proof (cardboard with paper or foam ing), 1*50/Pcs pack	pkt	१००
६१	Pipette Tips (5-200 ul)	Plastic, 1000Pcs/Pkt	pkt	६००
६२	Pipette Tips (100-1000 ul)	Plastic, 500 Pcs/Pkt	pkt	६००
६३	Tourniquet	Rubber tube	Pcs	५०
६४	Urine and stool containers	Sturdy polypropylene container with spill-proof screw cap and label, individually ed, capacity 30-50 ml (preferably transparent and with graduations)	Pcs	८
६५	Bamboo stick	Length 6 cm 100/Pkt	Pkt	२५०
६६	Sodium hypochloride	4 or 10%, W/V, liquid	Ltr	२२५
६७	SGOT Reagent	400ML/KIT (ISO, CE/USFDA approved)	Kit	६,०००
६८	SGPT Reagent	400ML/KIT (ISO, CE/USFDA approved)	Kit	६,०००
६९	Alkaline Phosphate Reagent	100ML/KIT (ISO, CE/USFDA approved)	Kit	२,०००
७०	Glucose Test Reagent	1000ML/KIT (ISO, CE/USFDA approved)	Kit	३,०००
७१	Uristic	Three parameters (Glucose, protein, pH) on a strip with color chart for reference to visual reading, 100 Strips/Package	Bottle	३००
७२	RA Factor Test Kit	Qualitative, latex, 100 Tests (ISO, CE/USFDA approved)	Kit	१,८००
७३	cholesterol Reagent	100ML/KIT (ISO, CE/USFDA approved)	Kit	२,५००
७४	Triglyceride Reagent	100ML/KIT (ISO, CE/USFDA approved)	Kit	३,०००
७५	HDL Reagent	100ML/KIT (ISO, CE/USFDA approved)	Kit	२,५००
७६	ESR Tube	Wintrobe's Tube, graduated	Pcs	४५
७७	Dropper	3 ml capacity (ISO, CE/USFDA approved)	Pcs	३
७८	EDTA Vacutainer	1. Intended use of haematological test. 2. Anti coagulant: EDTA K2 3. Capacity 3ml, certified 4. size: 100 tubes/ et 5. Should be ISO, FDA or CE certified 6. Should be color coded on top and sterile 7. Tube should not release any kind of materials while sample is on process 8. Leak proof 9. Should be compatible with vacuum blood collection	Pcs	७५०
७९	Tube Brush	Plastic Brush with Metal Handle (squirrel brush)	Pcs	४०
८०	Uric Acid Reagent	100ML/KIT (ISO, CE/USFDA approved)	Kit	२,५००
८१	Urea Reagent	100ML/KIT (ISO, CE/USFDA approved)	Kit	२,२००
८२	Creatinine Reagent	100ML/KIT (ISO, CE/USFDA approved)	Kit	१,०००
८३	CRP Reagent	Qualitative, latex, 100 Tests/Box (ISO, CE/USFDA approved)	Kit	१,८००
८४	ESR Needle	(ISO, CE/USFDA approved)	Pic	१२५
८५	1 Ml Syringe	(ISO, CE/USFDA approved)	Pcs	७
८६	Mantoux Reagent	Tuberculin PPD/ 5 ml	Bottle	४००
८७	Platelet Reagent	platelet diluting fluid (1% ammonium oxalate), 100 ml, ready to use	Bottle	३५०
८८	Antimicrobial Soap Liquid	"Suitable for sensitive and all skin type, provide protection from a range of germs, free standing with pump dispenser, Volume: /Ltr	Ltr	७००
८९	Handiplast	Round Tape/100 Pcs Pkt	Box	१२०
९०	Scrub Gown	M/L Size	Set	६५०
९१	Lab Apron	M/L Size	pcs	४५०
९२	Sample Tray	sturdy, non leaky, stainless steel surace	Pcs	१,०००

महाराष्ट्र
स्वास्थ्य विभाग

मुक्तिराम अर्याल
प्रमुख प्रशासकीय अधिकृत

SN	Items	Specification	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
९३	Dengue Combi Rapid test	Cartridge, immunochromatographic based kit with qualitative detection of NS1 antigen, and IgG and IgM antibodies separately with inbuilt control. Individually packed, long expiry. Sufficient amount of buffer and sample dropper to be included for each kit. CE IVD/USFDA/ (10tests/kit)	Box	१,७००
९४	Glass test tube	Borosilicate glass, Round bottomed, flat top, 8-10mm diameter, 75 mm.100 tube box	Box	६००
९५	Lint Paper	Lintless & Non-Abrasive Material. 100 sheet pad	Pad	१२०
९६	Sharps safety container	1. Made of heavy puncture-proof rigid cardboard material with one piece aperture handle and marked level for maximum fill. 2. Volume: 5 litres 3. Intended use: safely and efficiently contain, transport and store used sharps injection devices until final destruction, safe disposal or recycling. 4. Clear label indicating it's a safety used for syringes, needles and sharps with yellow in color. 5. Bio-hazard sign clearly and cons uously displayed on all the faces. 6. Step by step numerical directions for assembling. 10/pic Box	Box	१,५००
९७	Test tubes	Glass, Autoclavable Test Tube, Rimless, Clear, transparent, Size: 100mm x 12mm diameter.		५००
९८	Measuring Cylinder	Polypropylene, 50ml	Pic	४५०
९९	Wright stain	Should contain wright stain powder and solvent separately in pack. (250 ml/bottle)	Bottle	४५०
१००	Immersion Oil	Liquid state, cedar wood immersion oil. 100ml/bottle	Bottle	१,०००
१०१	Occult Blood Kit	Gum-Guaiaac based kit with applicator, developer solution and test card. (50 test/pkt)	Pkt	१,८००
१०२	Helicobacter pylori Antigen	Cartridge, immunochromatographic based with qualitative detection of antigen to Helicobacter pylori and inbuilt control. Individually packed, long expiry. Sufficient amount of buffer and sample dropper to be included for each kit. CE IVD/ USFDA/ (25 tests/kit)	Test	३,१२५
१०३	Plastic Garbage Bag	50 KG Capacity	Pcs	८०
१०४	Detergent	1000 Gm	Pocket	४५०
१०५	Loose Gloves	Par Box 100 Pcs	Box	५००
१०६	Surgical Gloves	Sterile in different size	Pair	२८
१०७	Enzymetic Cleaner	Pack (1Ltr)	Pak	२०,०००
१०८	Enzymetic Cleaner Concentrate	Pack (50ML)	Pak	७,६००
१०९	Lyse Reagent	Pack (1Ltr)	Pak	१६,०००
११०	Diluent Solution	Pack (20 Ltr)	Pak	१२,०००
१११	USG Paper	Thermal Paper 110mm*20M	Roll	१,२००
११२	ECG Paper	80mm*20m	Roll	१५०
११३	Macintosh	Rubber	Meter	२५०
११४	Test Tube Rack	24/holes Steels	Pcs	७५०
११५	Test Tube Rack	24/Holes Plastic	Pcs	४००
११६	Vacutainer (Clot Activator)	3ml	Pcs	७
११७	EDTA Vial	3ml	Pcs	७
११८	Gel Clot Vial	3ml		१२
११९	Sodium Fluoride Vial	3ml	Pcs	८
१२०	Tips Stand Rack	(10-100UL)	Pcs	४५०
१२१	Tips Stand Rack	(100-1000UL)	Pcs	५५०
१२२	Micropipette	10-100UL Variable	Pcs	८,०००
१२३	Micropipette	100-1000UL Variable	Pcs	८,०००
१२४	Micropipette	1000 IU Fixed	Pcs	४,०००
१२५	Test tube Brush	Medium	Pcs	५०
१२६	Micropore Tape	5 Meter	Pcs	६०
१२७	Glucometer Strips	Strips	Pcs	२०
१२८	Hemoglobin Strips	Strips	Pcs	१२०

SN	Items	Specification	Unit	आ.ब.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१२९	Rotator	Laboratory rotator designed to provide gentle and continuous mixing of blood samples, reagents, and test solutions for diagnostic applications.	Pcs	१२,५००
१३०	VDRL shekor	Adjustable-speed laboratory shaker used for performing VDRL (Venereal Disease Research Laboratory) tests by ensuring uniform reagent and sample mixing.	Pcs	१४,५००
१३१	Blood grouping tile	White porcelain or plastic tile with multiple wells used for ABO and Rh blood grouping by observing agglutination reactions.	Pcs	१,०००
१३२	Ependorf tube 0.5 ml	(500pcs /pack)	Pcs	१,२५०
१३३	Ependorf tube 1.5 ml	(500pcs /pack)	Pcs	१,५००
१३४	Ependorf tube 2 ml	(500pcs /pack)	Pcs	१,५००
१३५	Graduated Nuclease Tube free with cap	1.5ML 1000 pcs/box	Pkt	१५,०००
१३६	lamp of semi-automatic biochemistry analyzer	Lamp Type-Tungsten Halogen Lamp / Quartz Halogen Lamp, Rated Voltage-6 V or 12 V (as required by analyzer model)	Pcs	१०,०००
१३७	Timer	Digital laboratory timer with accurate countdown and alarm functions for monitoring test and incubation times.	Pcs	७५०
१३८	Roller	Laboratory tube roller providing gentle, continuous rolling motion for uniform mixing of blood samples, reagents, and other liquid specimens.	Pcs	१२,५००
१३९	Quality control for hematology test	5 ML (Ready-to-use three-level hematology control (Low, Normal, High). Compatible with the existing hematology analyzer model. Covers all routine hematology parameters reported by the analyzer. Supplied with lot-specific target values, SD, and acceptable ranges).	Set	१३,०००
१४०	Quality Control Sera Pathogenic	5ml (Human serum-based pathological (abnormal) quality control serum. Assigned abnormal target values for routine chemistry analytes. Compatible with the laboratory's biochemistry analyzer and reagent system).	Set	१३,०००
१४१	Quality Control Sera Normal	Human serum-based quality control material, Normal (Level 1) control with assigned values for all listed analytes. Compatible with the laboratory's biochemistry analyzer and reagent system.	Set	१३,०००
१४२	Distil Water	Laboratory Grade, Clear, Colorless, Free from Suspended Matter, Shelf Life Typically 12-24, Ph-5.0-7.0	Ltr	७५
१४३	Daily Rines Kit	Ready-to-use reagent kit for routine daily laboratory testing and quality analysis, ensuring accurate and reliable test results.	Set	१३,०००
१४४	Fluid Pack	Pre-filled reagent and diluent pack used for automated laboratory analyzers to support routine testing and instrument operation.	Set	३८,०००
१४५	Mission Control	Quality control reagent set used to verify analyzer performance, monitor accuracy, and ensure reliable laboratory test results.	Kit	२५,०००
१४६	Troubleshooting Kit	Diagnostic reagent kit designed to identify, resolve, and verify analyzer or reagent-related issues during laboratory operations.	Pkt	२०,०००
१४७	Acupuncture needle	Sterile, single-use stainless steel needle for acupuncture treatment, available in various lengths and gauges.	Pkt	१,८७०
१४८	acupuncture tapping needles	Multi-needle tapping instrument (plum blossom/dermal hammer) used for superficial skin stimulation and therapeutic acupuncture techniques.	Than	१,४५०
१४९	Acupuncture stimulator machine	Electronic device that delivers adjustable electrical pulses through acupuncture needles for enhanced pain relief and muscle stimulation.	Than	२५,०००
१५०	BCM blood circulatory machine	Therapy device designed to improve blood circulation, reduce muscle stiffness, and promote recovery through electrical or mechanical stimulation.	Set	३३,०००
१५१	Cupping set	Glass or plastic suction cups with manual or vacuum pump for cupping therapy to relieve muscle tension and improve circulation.	Set	५,३५०

SN	Items	Specification	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१५२	Acupuncture wall charts & dolls	Educational anatomical charts and meridian dolls illustrating acupuncture points and channels for teaching and clinical reference.	Than	११,४००
१५३	Acp vibrator machine	Handheld therapeutic vibration device used to stimulate acupuncture points, relieve muscle pain, and enhance circulation.	Set	९,३००
१५४	Infra red lamp for heating purpose	Therapeutic infrared heat lamp providing deep tissue warmth to reduce pain, improve circulation, and relax muscles.	Than	१५,५००
१५५	Pure moxa, impure moxa, stick moxa	Moxibustion materials made from mugwort, available in loose, processed, and stick forms for heat therapy at acupuncture points.	piece	४,१००
१५६	Perilight	Portable LED examination light providing bright, focused illumination for medical examinations and minor procedures.	piece	७,५००
१५७	Fetal Doppler	Portable handheld ultrasound device used to detect and monitor fetal heart rate during pregnancy.	piece	४५,०००
१५८	Duck's speculum	Reusable or disposable vaginal speculum used for gynecological examinations and cervical procedures.	tab	६५०
१५९	surgical blade 11 no.	Sterile, single-use pointed surgical blade designed for precise incisions, punctures, and drainage procedures.	piece	५
१६०	Disposable syringe 20 ml	sterile, single-use 20 mL syringe for accurate administration or withdrawal of fluids and medications.	PCS	१५
१६१	Surgical Blade	Sterile, Disposable, Carbon Steel, Sizes No. 10, 11, 15, 20-24	Box	५००
१६२	Scalpel Handle	Stainless Steel, No. 3 & No. 4	pcs	१३०
१६३	Mayo Scissors	Straight/Curved, Stainless Steel, 14-17 cm	pcs	४००
१६४	Metzenbaum Scissors	Curved, Stainless Steel, 18 cm	pcs	४५०
१६५	Dressing Scissors	Stainless Steel, 14-16 cm	pcs	१८०
१६६	Artery Forceps	Straight & Curved, Stainless Steel, 12.5-16 cm	pcs	२२५
१६७	Mosquito Forceps	Straight/Curved, Stainless Steel, 12.5 cm	pcs	१५०
१६८	Tissue Forceps	Toothed (1x2 Teeth), Stainless Steel, 15 cm	pcs	१५०
१६९	Dressing Forceps	Plain, Stainless Steel, 15-18 cm	pcs	१५०
१७०	Needle Holder	Mayo-Hegar, Stainless Steel, 16-18 cm	pcs	२५०
१७१	Sponge Holding Forceps	Stainless Steel, 24 cm	pcs	४५०
१७२	Backhaus Towel Clip	Stainless Steel, 9-13 cm	pcs	३००
१७३	Allis Tissue Forceps	Stainless Steel, 15 cm	pcs	३००
१७४	Babcock Forceps	Stainless Steel, 16-20 cm	pcs	८२५
१७५	Kocher Forceps	Straight/Curved, Stainless Steel, 16 cm	pcs	२२५
१७६	Retractor	Langenbeck, Stainless Steel, Double-ended	pcs	१,०५०
१७७	Staple Remover	Sterile, Disposable	pcs	८५०
१७८	Gauze Swab	Sterile, 8-Ply, 10 x 10 cm	pcs	१०
१७९	Cotton Roll	Absorbent, Medical Grade	pcs	२००
१८०	Crepe Bandage	Cotton, 5 cm, 10 cm, 15 cm	pcs	७५
१८१	Adhesive Tape	Microporous, 1-3 Inch Width	pcs	२००
१८२	Kidney Tray	Stainless Steel, 8-10 Inch	pcs	१५०
१८३	Instrument Tray	Stainless Steel, Various Sizes	pcs	८५०
१८४	Gallipot	Stainless Steel, 150-250 mL	pcs	३५०
१८५	Dressing Drum	Stainless Steel, 9-12 Inch	pcs	२,२००
१८६	Sterilization Indicator Tape	Steam Autoclave Compatible	pcs	५००
१८७	Suction Catheter	Sterile, FG 8-16	pcs	५०
१८८	Disposable Suction Tubing	Medical Grade PVC	pcs	३००
१८९	Roller Bandage (Cotton)	5 cm x 4 m (100% Cotton, Non-sterile, Soft, Highly Absorbent)	pcs	२०
१९०	Roller Bandage (Cotton)	7.5 cm x 4 m (100% Cotton, Non-sterile, Soft, Highly Absorbent)	pcs	२०
१९१	Roller Bandage (Cotton)	10 cm x 4 m (100% Cotton, Non-sterile, Soft, Highly Absorbent)	pcs	२०

प्रशासन विभाग

SN	Items	Specification	Unit	आ.ब.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१९२	Roller Bandage (Cotton)	15 cm × 4 m (100% Cotton, Non-sterile, Soft, Highly Absorbent)	pcs	३०
१९३	Crepe Bandage	5 cm × 4 m (Stretched)(Cotton/Spandex Blend, Elastic, Washable, Reusable)	pcs	१५०
१९४	Crepe Bandage	7.5 cm × 4 m (High Elasticity, Skin Friendly)	pcs	३००
१९५	Crepe Bandage	10 cm × 4 m (Stretched)(Compression Support, Breathable)	pcs	३५०
१९६	Crepe Bandage	15 cm × 4 m (Stretched)(Heavy Compression, Reusable)	pcs	४००
१९७	Elastic Adhesive Bandage (EAB)	5 cm × 4.5 m (Cotton Fabric with Zinc Oxide Adhesive)	pcs	५००
१९८	Elastic Adhesive Bandage (EAB)	7.5 cm × 4.5 m (Strong Adhesion, Flexible)	pcs	५००
१९९	Triangular Bandage	90 × 90 × 127 cm (100% Cotton, Non-sterile, Reusable)	pcs	२००
२००	Cidex (Glutaraldehyde)	2% Activated Glutaraldehyde Solution, 5 L Container, High-Level Instrument Disinfectant, Effective for 14 Days After Activation.	pcs	१,२५०
२०१	IV Cannula	Sterile, Disposable, PTFE/FEP Catheter, Sizes 14G, 16G, 18G, 20G, 22G, 24G, Injection Port, Color Coded.	pcs	१५
२०२	IV Infusion Set	Sterile, Disposable, DEHP-Free PVC, 20 Drops/mL, 150 cm Tubing, Roller Clamp, Latex-Free Injection Port, Luer Lock, EO Sterilized.	pcs	१६
२०३	MUAC Tape	WHO/UNICEF-compatible MUAC tape for children 6-59 months, Non-stretch, waterproof, durable plastic construction, Measurement scale in millimetres with 1 mm graduations.	pcs	१०
२०४	Zip Lock	Transparent Low-Density Polyethylene (LDPE) or Polyethylene (PE), food/laboratory grade, Leak-resistant, airtight zip-lock seal, Minimum 50-micron thickness.	PKT	१,१००
२०५	X-Ray Film	High-quality radiographic film designed to produce clear, high-resolution diagnostic images with excellent contrast for use in medical X-ray imaging systems. Dry Films size , 10 *12 (100pcs/pkt)	PKT	१६,५००
२०६	X-Ray Film	High-quality radiographic film designed to produce clear, high-resolution diagnostic images with excellent contrast for use in medical X-ray imaging systems. Dry Films size , 8 *10 (100pcs/pkt)	PKT	१२,०००

Ayurveda Medicine

सि.नं.	Medicine Name	Specification	Unit	आ.ब.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१	Avipattikar churna	100gm	ph	२०८
२	Hingwastak churna	100gm	ph	२६५
३	Mahanarayan oil	60 ml	ph	१७४
४	Sitopaladi churna	100gm	ph	२३९
५	Pushyanug Churna	100gm	ph	२५२
६	Mrigamadasav	15 ml.	ph	८७
७	Nimbadi churna	100gm	ph	२४७
८	Gandhak rasayan	10gm	ph	१५२
९	Khadiradi vati	10gm	ph	१०४
१०	Yograj guggulu	25gm	ph	२१७
११	Jatyadi Tail	60 ml	ph	२३०
१२	Kaishoor guggulu	25gm	ph	२१३
१३	Chandraprabha vati	25gm	ph	२२६
१४	Triphala churna	100gm	ph	१२८
१५	Ashwagandha churna	100gm	ph	३३०
१६	Bilwadi Churna	100gm	ph	२३९
१७	Mahayograj Guggul	10 gm	ph	२६५
१८	Jwano Churna	100gm	ph	१९१
१९	Dashmool Tail	50ml	ph	३०४

सि.नं.	Medicine Name	Specification	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
२०	Amalki Churna	100gm	ph	२१३
२१	Shatavari Churna	100gm	ph	३३४
२२	Lawan Bhaskar Churna	60gm	ph	११३
२३	Balamrit	100ml	ph	१२१
२४	Shadvindu Tail	15ml	ph	७६
२५	Mahashankha Vati	10gm	ph	११७
२६	Laxmibilash Ras	10gm	ph	२१७
२७	Arshakuthar Ras	10gm	ph	१५२
२८	Ishabgol Powder	100gm	ph	१४७
२९	Ichchhavedi Ras	10gm	ph	८२
३०	Arshoghni Vati	10gm	ph	१५२
३१	Arogyabardhini Vati	10gm	ph	१३४
३२	Shilajit Gold	10cap	ph	३४८
३३	Shilajit Paste	25gm	ph	३५६
३४	Bolbaddha Ras	10gm	ph	१३४
३५	Bramhi Vati	10gm	ph	२१३
३६	Lohasava	450ml	ph	२४३
३७	Kumaryasav	450ml	ph	२३९
३८	Rohitakyadi Churna	50gm	ph	१३९
३९	Panchasakar Churna	50gm	ph	८७
४०	Ashokarista	450ml	ph	१९१
४१	Dashmularista	450ml	ph	२३४
४२	Khadirarista	450ml	ph	२३९
४३	Abhayarista	450ml	ph	२४३
४४	Kutajarista	450ml	ph	२३९
४५	Chyawanprash Abaleha	500gm	ph	३०४
४६	Sarpagandhaghan Vati	25gm	ph	२२१
४७	Mahasudarshan Churna	100gm	ph	२५२
४८	Tankan Bhasma	10gm	ph	११३

Essential Medicine

सि.नं.	Particulars	Specifications	Strength	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१	Acetylsalicylic acid (aspirin)	Tablet	75mg	०.६५
२	Adrenaline (epinephrine)	Injection	1mg in 1ml	१८.००
३	Albendazole	Chewable Tablet	400mg	६.००
४	Albendazole	Suspension	200mg/5ml	१६.००
५	Aluminium hydroxide + Magnesium Hydroxide (antacid)	Tablet	250mg + 250mg	१.५०
६	Amitriptyline	Tablet	10mg	१.२०
७	Amitriptyline	Tablet	25mg	२.००
८	Amlodipine	Tablet	5mg	२.००
९	Amoxicillin	Oral Capsule	500mg	६.००
१०	Amoxicillin	Powder for oral suspension	125mg/5ml, 100 ml	६०.००
११	Amoxicillin	Dispersible Tablets	125mg	३.००
१२	Amoxicillin	Dispersible Tablets	250mg	४.००
१३	Ampicillin	Powder for IV/IM injection	500mg vial	२४.००
१४	Atropine	Injection	0.6mg in 1ml ampoule	८.००
१५	Azithromycin	Tablets	250mg	१२.००

सि.नं.	Particulars	Specifications	Strength	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१६	Azithromycin	Tablets	500mg	२०.००
१७	Calamine	Lotion	15% w/v, 30ml	४०.००
१८	Calcium gluconate	Injection	1gm per 10ml (100mg/ml of 10 ml)	३५.००
१९	Carbamazepine	Tablets	100mg	१.५०
२०	Carbamazepine	Tablets	200mg	२.००
२१	Cefixime	Tablet	400 mg	२०.००
२२	Cefixime	Tablet	200mg	१२.००
२३	Cefixime.	Oral suspension	100mg/5ml (30ml)	१०३.४४
२४	Ceftriaxone	Powder for Injection	250mg/ vial	३०.००
२५	Ceftriaxone	Powder for Injection	500mg/vial	४०.००
२६	Ceftriaxone	Powder for Injection	1gm w/vial	६०.००
२७	Cetirizine HCL	Tablet	10mg	२.००
२८	Cetirizine HCL	syrup	5mg/5ml (30ml)	३०.००
२९	Charcoal, activated	Powder in sachet	10gm	५०.००
३०	Chlorhexidine (CHX)	Solution	Solution, 0.2% oral 50ml	७०.००
३१	Chlorhexidine (CHX)	Ointment	4%, 5gm	२२.०५
३२	Ciprofloxacin	Tablets	250mg	४.५०
३३	Ciprofloxacin	Tablets	500mg	५.५०
३४	Ciprofloxacin	Eye/Ear Drops	0.3%w/v, 5ml	१७.००
३५	Ciprofloxacin	Eye ointment	0.3%, 5g	१५.००
३६	Ciprofloxacin	Injection	200mg/100ml	२६.०५
३७	Clotrimazole	skin cream	1%, 25g	३५.००
३८	Clotrimazole	Vaginal Tablets	100mg	७.००
३९	Clotrimazole	Mouth Paint	1%w/v, 15 ml	१६०.००
४०	Clove Oil	Liquid	5ml	२२.००
४१	Cloxacillin	Capsules	250mg	७.००
४२	Cloxacillin	Capsules	500mg	९.००
४३	Cloxacillin	Powder for oral liquid	125mg/5ml in 100ml	९०.००
४४	Cotrimoxazole (Sulphamethoxazole and Trimethoprim 5:1)	Tablets	400 mg + 80mg	३.०७
४५	Cotrimoxazole (Sulphamethoxazole and Trimethoprim 5:1)	Tablets	800mg + 160mg	५.९५
४६	Cotrimoxazole (Sulphamethoxazole and Trimethoprim 5:1)	syrup	200mg + 40mg/5ml, 50ml	४५.००
४७	Dexamethasone	Injection	4mg in 1ml ampoule	१८.००
४८	Dextrose (glucose)	Injection/soln	5%, 500ml	४२.६५
४९	Dextrose (glucose)	Injection/soln	25% of 50ml Amp	४८.००
५०	Diazepam	Injection	2ml amp (5mg/ml)	३४.००
५१	Diazepam	Tablet	5mg	३.१५
५२	Diclofenac sodium	Tablet	50mg,	३.००
५३	Diclofenac sodium	Injection	3ml ampoule (25mg/ml)	९.००
५४	Doxycycline	capsule	100mg	४.००
५५	Ferrous sulphate and folic acid	Tablet	60mg elemental iron plus 400mcg folic acid	०.८०
५६	Fluconazole	Capsule	150mg	८.००
५७	Fluoxetine	Capsule	20mg	४.००
५८	Folic acid	Tablet	5mg	१.२०
५९	Furosemide	Tablet	40mg	१.१०
६०	Gentamicin	Injection	40mg/ml in 2ml	१८.००
६१	Gentian Violet	Aqueous solution	1%, 10 ml	२५.००

सि.नं.	Particulars	Specifications	Strength	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
६२	Glimepiride	Tablets	1mg	३.५०
६३	Glimepiride	Tablets	2mg	५.००
६४	Hydrocortisone	Powder for injection	100mg in vial	४०.००
६५	Hyoscine butylbromide	Injection	Inj 20mg/ml	१५.००
६६	Hyoscine butylbromide	Tablet	10mg	६.००
६७	Ibuprofen	Tablets	200mg	१.१०
६८	Ibuprofen		400mg	२.००
६९	Lignocaine hydrochloride	Injection	2 % in vial, 30 ml	४०.००
७०	Lignocaine with adrenaline 1:10,000	Injection	2% plus Adrenalin 1:10,000, 30 ml	४६.००
७१	Losartan	Tablets	25mg	४.००
७२	Losartan	Tablets	50mg	५.००
७३	Magnesium sulphate	Injection	500mg/ml in 2ml ampoule	१७.२०
७४	Metformin	Tablets	500mg,	१.५०
७५	Metformin	Tablets	850 mg	२.००
७६	Metformin	Tablets	1000mg	३.००
७७	metoclopramide	Tablet	10mg	१.५०
७८	metoclopramide	Solution	5mg/5ml (15ml)	३०.००
७९	metoclopramide	Injection	5mg/ml in 2ml ampoule	९.००
८०	Metronidazole	Tablets	200mg	१.५०
८१	Metronidazole	Tablets	400mg	२.१०
८२	Metronidazole	Oral liquid	200mg/5ml, 90 ml	४०.००
८३	Metronidazole	Injection	500mg/100ml	४०.००
८४	Mifepristone + Misoprostol	Tablet	combi pack includes 200mg + 4(200) mcg	३००.००
८५	Misoprostol	Tablet	200mcg	२२.००
८६	Neomycin skin	Ointment	2% w/w 10gm	५०.००
८७	Nifedipine	Tablet	10mg	२.५०
८८	Nitrofurantion	Tablet	100mg	६.००
८९	Normal Saline (NS)	Solution	0.9% Infusion solution, 500ml	४२.७०
९०	Oral Rehydration Salts (ORS)	Powder	WHO formula sachet	९.००
९१	Oxygen	Inhalation	Medicinal Gas	
९२	Oxymetazoline	Nasal drop	0.025%: 10ml,	६०.००
९३	Oxymetazoline	Nasal drop	0.05% 10ml	६०.००
९४	Paracetamol	Injection	150mg/ml in 2ml ampoule	२०.००
९५	Paracetamol	Tablet	500mg	१.००
९६	Paracetamol	Syrup	125mg/5ml, 50ml	२५.००
९७	Permethrin	Lotion	1% 100 ml	१००.००
९८	Permethrin	Cream	5% w/v 30g	९०.००
९९	Pheniramine	Injection	22.75mg/ml 2ml	९.००
१००	Phenobarbital	Tablet	30mg	२.००
१०१	Povidone iodine	Solution	5%w/v 500ml	३००.००
१०२	Potassium Chloride	Injection	150mg/ml	३५.००
१०३	Prednisolone	Tablets	5mg	१.५०
१०४	Prednisolone	Tablets	10mg	२.५०
१०५	Prednisolone	Tablets	20mg	५.००
१०६	Pyridoxine	Tablet	10mg	२.००
१०७	Ranitidine	Tablet	150mg	१.५०

सि.नं.	Particulars	Specifications	Strength	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१०८	Ranitidine	Injection	25mg/ml in 2ml ampoule	८.००
१०९	Ringer's Lactate (RL)	Solution	500ml	५२.०५
११०	Risperidone	Tablets	1mg	२.००
१११	Risperidone	Tablets	2mg	३.००
११२	Salbutamol	Oral Liquid	2mg/5ml (60ml)	५०.००
११३	Salbutamol	MDI	100mcg	२००.००
११४	Silver sulfadiazine	Cream	0.2% w/v 15g	७०.००
११५	Tetanus Toxoid (TT)	Injection	0.5ml /dose	२०.००
११६	Tetracycline	Eye ointment	1%, 5g	२६.१०
११७	Tinidazole	Tablet	500mg	४.००
११८	Vitamin B complex	Tablet	Thiamine 10mg, riboflavin 10mg, pyridoxine 3mg, cyanocobalamin 15 mcg. (Therapeutic dose)	१.८०
११९	Zinc sulphate	Dispersible Tablets	10mg	२.००
१२०	Zinc sulphate	Dispersible Tablets	20mg	२.००
१२१	Calcium	Tab	an oral supplement containing 500 mg of elemental calcium and 250 IU of Vitamin D3	२.५०
१२२	Levonorgestrel	Tab	1.5 mg (Pharmacological Class ; Emergency hormonal contraceptive)	५.७७

निर्माण सम्बन्धी सामग्री

क्र.स.	Description of Works	Specifications	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
1. Light and Fixtures				
१	60 watt LED AC Street light.	TUV certified with IEC60598, IP66, IK10, CRI>70, CCT: 2700K-6500K, P.F>=0.95, THD<10%, Luminous efficacy >130lm/watt with auto on/off switch and auto dimming operation	Set	१२,०००
२	90 watt LED AC Street light.	TUV certified with IEC60598, IP66, IK10, CRI>70, CCT: 2700K-6500K, P.F>=0.95, THD<10%, Luminous efficacy >130lm/watt with auto on/off switch and auto dimming operation	Set	१६,५००
३	120 watt LED AC Street light.	TUV certified with IEC60598, IP66, IK10, CRI>70, CCT: 2700K-6500K, P.F>=0.95, THD<10%, Luminous efficacy >130lm/watt with auto on/off switch and auto dimming operation	Set	१८,६००
४	5-10 watt narrow beam LED laser spot light applicable for efficient step marking with minimal glare	Input Voltage: 220-240V, IP65, CCT: 2700-4000K, CRI>=80, P.F>0.9, Luminous efficacy: 90lm/watt	Set	१२,०००
५	20-30 watt LED Wallwasher light applicable for Façade lighting with minimal glare	Input Voltage: 220-240V, Beam angle 10 to 60 degree, IP65, CCT: 2700-4000K/RGBW, CRI>=80, P.F>0.9, Luminous efficacy: 90lm/watt	Set	१६,०००
६	5 Watt LED Spot light applicable for Façade and landscaping lighting with minimal glare	Input Voltage: 220-240V, Beam angle: 10 to 60 degree, IP65, CCT: 2700-4000K/RGBW, CRI>=80, P.F>0.9	Set	५,५००
७	6-10 Watt LED Spot light applicable for Façade and landscaping lighting with minimal glare	Input Voltage: 220-240V, Beam angle: 10 to 60 degree, IP65, CCT: 2700-4000K/RGBW, CRI>=80, P.F>0.9	Set	८,२००
८	15-20 Watt LED Spot light applicable for Façade and landscaping lighting with minimal glare.	Input Voltage: 220-240V, Beam angle: 10 to 60 degree, IP65, CCT: 2700-4000K/RGBW, CRI>=80, P.F>0.9	Set	१२,४००
2. Accessories				
१	Bed Switch		Nos	४०
२	Bulb Cover Umbrella		Nos	५६०
३	16 A contractor 3/4 P		Nos	१,७००
४	Safety Gloves		Pair	६४०
५	Pendent holder screw type		Nos	४५
	Pendent Holder Pin Type		Nos	४०

मुक्तिराम अर्याल
प्रमुख प्रशासकीय अधिकृत

क्र.स.	Description of Works	Specifications	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
७	street light bulb cover	Metal Body	Nos	९८०
८	street light bulb cover	Plastic Body	Nos	८००
९	Light Number plate (8*5) inches		Nos	६०
१०	Day night sensor for auto on-off for street light		Nos	९२५
११	20-30 watt printed circuit board (PCB) Osram, Philips or equivalent		Nos	८००
१२	40-50 watt printed circuit board (PCB) Osram, Philips or equivalent		Nos	१,४००
१३	100-120 watt printed circuit board (PCB) Osram, Philips or equivalent		Nos	१,६४०
१४	LED Power Driver	20-30 watt high quality	Nos	१,१००
१५	LED Power Driver	40-50 watt high quality	Nos	१,४१०
१६	LED Power Driver	100-120 watt high quality	Nos	१,६००
१७	Street light Arms/stand,	0.5 to 0.7 mtr long	Nos	७००
१८	Installation of Street light		Set	६५०
१९	Installation of street light	(बिग्रेको लाईट फिल्ड बाट झिकी बर्कशोपमा लगी सामान्य मर्मत सुधार गरी पून फिल्डमा जडान)	Set	१,५२०
२०	Waterproof T shaped Termination connector		Set	१,५२०

Stone

S.N.	Particulars	Specifications	Unit	
१	1 Inch Stone Slab	१" मेसिन कटिङ्ग स्ल्याप दुङ्गा	Sq.Ft.	२६०
२	2 Inch Stone Slab	२" मेसिन कटिङ्ग स्ल्याप दुङ्गा	Sq.Ft.	३५०
३	3 Inch Stone Slab	३" मेसिन कटिङ्ग स्ल्याप दुङ्गा	Sq.Ft.	४०५
४	4 Inch Stone Slab	४" मेसिन कटिङ्ग स्ल्याप दुङ्गा	Sq.Ft.	६१५

PRECAST CONCRETE & PAVING PRODUCTS

S.N.	Particulars	Specifications	Unit	
१	60mm thick rectangular cement concrete interlocking block	Grade M35 or above, multi-blended colour (200x100x60mm) NS standard	Sqm	२,७५०
२	60mm thick rectangular cement concrete interlocking block	Grade M35 or above, grey/single colour (200x100x60mm) NS standard	Sqm	२,२५०
३	Concrete paving tile / tactile, matrix slab	single color/directional/dotted with compressive strength M35 or above, thickness 40mm (400x400x40mm)	Sqm	१,७५०
४	Concrete paving tile / tactile, matrix slab	single color/directional/dotted with compressive strength M35 or above, thickness 60mm (400x400x60mm)	Sqm	२,९३८
५	M20 precast concrete kerbstone	38cm x 20cm x 25cm / 300x200x350 R.Ft / 35cm x 20cm x 30cm NS standard	Pcs	४००
६	M20 precast concrete kerbstone	35cm x 18.5cm x 25cm / 250x200x380 R.Ft NS standard	Pcs	३६०
७	50mm thick Heavy Duty M20 Hexagonal Concrete Block	(200x226x50mm) NS Standard - Natural Grey	Sqm	१,३०५
८	50mm thick Heavy Duty M20 Hexagonal Concrete Block	(200x226x50mm) NS Standard - Single Colour	Sqm	१,४१०
९	50mm thick Heavy Duty M20 Hexagonal Concrete Block	(200x226x50mm) NS Standard - Blended Colour	Sqm	१,६२०
१०	60mm thick Heavy Duty M20 Hexagonal Concrete Block	(200x226x60mm) NS Standard - Natural Grey	Sqm	१,४००
११	60mm thick Heavy Duty M20 Hexagonal Concrete Block	(200x226x60mm) NS Standard - Single Colour	Sqm	१,५०३
१२	60mm thick Heavy Duty M20 Hexagonal Concrete Block	(200x226x60mm) NS Standard - Blended Colour	Sqm	१,७०१
१३	Permeable Interlock Pavers Grey Color	(Grade M35 or above) (228mm x 158mm x 60mm) NS Standard	Sqm	२,३५०
१४	Permeable Interlock Pavers Single Color	(Grade M35 or above) (228mm x 158mm x 60mm) NS Standard	Sqm	२,८१४
१५	Rectangular Interlock Pavers Multi Blended Color	(Grade M35 or above) (228mm x 158mm x 60mm) NS Standard	Sqm	२,८५०

१५/६/७
मुक्तिराम अर्याल
प्रमुख प्रशासकीय अधिकृत

सम्पदा तथा पर्यटनसँग सम्बन्धित

क्र.स.	Description	Specification	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१. Stone Murti (कर्मिग, ढुवानी तथा जडान सहित)				
SN	Name of Item			
१	Stone murti	5" x 8"	pcs	८०००
२	Stone murti	7" x 10"	pcs	१२०००
३	Stone murti	8" x 12"	pcs	१५०००
४	Stone murti	10" x 15"	pcs	२२०००
५	Stone murti	12" x 18"	pcs	३००००
२. Stone Singha (कर्मिग, ढुवानी तथा जडान सहित)				
SN	Name of Item			
१	Stone Singha	4' height (१ जोडी)	pair	४०००००
२	Stone Singha	3' height (१ जोडी)	pair	२५००००
३	Stone Singha	2' height (१ जोडी)	pair	१०००००
४	Stone Singha	18" height (१ जोडी)	pair	५००००
३. Stone Hiti (type-१,) (कर्मिग, ढुवानी तथा जडान सहित)				
SN	Name of Item			
१	Type-1 Stone hiti 1' length (medium)		pcs	७०००
२	Type-1 Stone hiti 1.5' length (medium)		pcs	१२०००
३	Type-1 Stone hiti 2' length (medium)		pcs	२००००
४	Type-1 Stone hiti 2.5' length (medium)		pcs	२५०००
५	Type-1 Stone hiti 3' length (medium)		pcs	३००००
६	Type-1 Stone hiti 3' length (heavy)		pcs	३५०००
७	Type-1 Stone hiti 4' length (medium)		pcs	४००००
८	Type-1 Stone hiti 4' length (heavy)		pcs	५००००
९	Type-1 Stone hiti 5' length (medium)		pcs	६००००
१०	Type-1 Stone hiti 5' length (heavy)		pcs	८०,०००
Medium: कम कर्मिग भएको र ढुंगा को चौडाई सानो भएको				
Heavy: बढी कर्मिग भएको र ढुंगा को चौडाई ठुलो भएको				
४. Stone Hiti (type-२, manga hiti) (कर्मिग, ढुवानी तथा जडान सहित)				
SN	Name of Item			
१	Type-2 Stone hiti 1' length (medium)		pcs	१०,०००
२	Type-2 Stone hiti 1.5' length (medium)		pcs	१५,०००
३	Type-2 Stone hiti 2' length (medium)		pcs	२५,०००
४	Type-2 Stone hiti 2.5' length (medium)		pcs	३०,०००
५	Type-2 Stone hiti 3' length (medium)		pcs	३५,०००
६	Type-2 Stone hiti 3' length (heavy)		pcs	४०,०००
७	Type-2 Stone hiti 4' length (medium)		pcs	५०,०००
८	Type-2 Stone hiti 4' length (heavy)		pcs	६०,०००
९	Type-2 Stone hiti 5' length (medium)		pcs	९०,०००
१०	Type-2 Stone hiti 5' length (heavy)		pcs	११०,०००
Medium: कम कर्मिग भएको र ढुंगा को चौडाई सानो भएको				
Heavy: बढी कर्मिग भएको र ढुंगा को चौडाई ठुलो भएको				

कुम्हार
राष्ट्रिय प्रमुख
सिन् विभाग

क्र.स.	Description	Specification	Unit	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१	ढुङ्गाको गजुर	१' बेस डायमिटर, १'८" उचाई	No.	१९,०००
२	५" बाक्लो ढुङ्गा बाट स्लोप छाना बनाउने कार्य	ढुङ्गा को नाप १२"×१०"×५"	R.ft.	४,९००
३	५" बाक्लो ढुङ्गा बाट (ट्वा ज्य) स्लोप छानाको किनारा बनाउने कार्य		R.ft.	४,९००
४	५" बाक्लो ढुङ्गा खल नागोल काँनेश बनाउने कार्य		R.ft.	४,९००
५	ढुङ्गा बाट ३" मोटाईको गोल नागोल बनाउने कार्य		R.ft.	३,९००
६	ढुङ्गा बाट विभिन्न बुट्टेदार काँनेश बनाउने कार्य	(२"×३"×४")	R.ft.	६,९००
७	Supply and Installation of Pre-cast brick बुट्टा Pillar(स्तम्भ)	(स्तम्भको साइज ४')	No.	२०,०००
८	Supply and Installation of Pre-cast brick बुट्टा Pillar(स्तम्भ)	(स्तम्भको साइज ३' ६")	No.	१५,०००

वातावरण व्यवस्थापनसँग सम्बन्धीत

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१	एक पाङ्ग्रे गाढा	Material: Steel, Enamel Coated, Single Wheel, Dimension : 1370mm * 470mm * 590mm, Pneumatic Wheel Diameter 360mm	थान	६९९५
२	चोयाको थुन्से	Height 18", top diameter 18" and base diagonal dimensions 10", and weight at least 900gm	थान	४३०
३	खुर्पा	Full metal body, Weight at least 750 gm, Handle length 5" and height 10"	थान	७७५
४	हसिया	Full metal body, Weight at least 300 gm, Handle length 6" and height 9"	थान	५६५
५	कुटो पाटे चुच्चे	GI pipe handle of 1" diameter and length of 12", चुच्चे side length 4.5" र पाटे length 4" and width 2"	थान	४९५
६	सावेल चारपाटे	Full metal body(Grip Handle, Shaft, Collar, Blade), Blade size 12"×9", Shaft Length 21", Shaft Diameter 1.5" and Handle Grip of Length 7" and Width 4.5"	थान	७९५
७	सावेल चुच्चे	Full metal body, Blade size from step to tip 12", width of blade 9", Shaft Length 21", Shaft Diameter 1.5" and Handle Grip of Length 7" and Width 4.5"	थान	७५०
८	गल	5' in length, full solid metal body, 6.8 kg in weight	थान	१६२५
९	पिक बिड सहित	Weight of pickaxe only 2.1kg, weight with handle 2.7 kg, wooden handle length of 29", Pickaxe should have chisel end, pick end and eye for inserting the wooden handle	थान	६५०
१०	त्रिपाल बुट्टेदार (सानो १२'×१५')	12"×15" in size, checked pattern, edges are rope reinforced, eyelets at every corner	थान	१८००
११	त्रिपाल बुट्टेदार (ठूलो १५'×२१')	15"×21" in size, checked pattern, edges are rope reinforced, eyelets at every corner	थान	३९५०
१२	बोरा	Made up of plastic and should handle 100 kg of filling weight	थान	७५
१३	कोदालो बिड सहित	Weight of spade only 0.9kg, weight with handle 1.4 kg, wooden handle length of 29", Spade should have chisel end and eye for inserting the wooden handle	थान	८६०
१४	हाते करौति	Pruning saw, 320 mm length, permanently filed teeth, triple edge with plastic/wooden handle (Ingco Brand or Equivalent)	थान	९०५
१५	नरिवलको झाडु	3' in length and minimum weight should be 300 gm	थान	१९५
१६	सेफ्टि बेल्ट	Single attachment, D- type	थान	१२६५
१७	फुल गमबूट(छाती सम्म)	Lightweight, waterproof, Color: Nepal Army, Material : Nylon reinforced PVC, Style : Hip Waders, Cleated Sole and Elastic Waist Band trousers, size 37-44 range	थान	९९००
१८	रिफ्लेक्टिभ ज्याकेट	2 side pockets with zippers, two lines of high reflective tape of 1.5" width along the waist and chest lines, one zipper vertically in the middle, black color collar, inner layer of net cloth(black) and protection around the sleeves opening, KMC logo and name print	थान	८००

क्र.स.	मालसामानको विवरण	स्पेसिफिकेसन	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१९	रबरको पन्जा	(finger and palm rubber coated)	जोडी	२२५
२०	रबरको पन्जा (लामो)	long upto fore arm	जोडी	३०५
२१	सेफ्टि हेलमेट	Hard helmet, With chin strap, adjustable head buckle, color should be as specified by office	थान	७१०
२२	मास्क	Disposal Mask (Per Piece specifications : 3 layers, size 17.5cm*9.5cm, with elastic ear loop and nose pin, melt blown filter), 50 PCs Box	प्याकेट	na
२३	डस्ट प्यान (जस्ता पाता)	handle 4", length of pan 9", top width 7.5", bottom width 9", material tin	थान	२५०
२४	लामो विड भएको मप	5' handle	थान	४७५
२५	तार ब्रस	wired brush	थान	१६०
२६	च्वाफी लौरो सहितको	5' firm and solid wooden stick	थान	४४५
२७	प्लाष्टिकको ब्रस (लट्टी सहितको)	at least 5' handle	थान	५५५
२८	फोहोर उठाउने २ चक्रे गाडा	made up of 40kg (minimum) (except wheels) of mild steel, hollow pipe handles, tapering at bottom sides, 2 leg stands, 2 wheels of appropriate dia and type	थान	१८५००
२९	गारवेज प्लाष्टिक	100 litre capacity	थान	२८
३०	छाता ठूलो	XXL Size radius 30"	थान	१२००
३१	गाडाको पाङ्ग्रा, ट्युब सहित	Wheel Diameter 360mm, tolerance : ±50mm	थान	१८७५
३२	डस्टबिन १४० लिटर(पाङ्ग्रावाला)	LLDPE Plastic Dustbin with wheels, capacity 140 litres, base 21"*18", Top lid 29"*28", Height 42", product weight of 16 kg, handle and wheel installed	थान	९३००
३३	गम बुट	waterproof, rubber sole, approx height 11", black in color	जोडी	७५०
३४	साबुन	bathing soap, weight 100 gm, Dettol or equivalent	थान	८५
३५	क्याप टोपी	with KMC name and logo, department name in nepali	थान	४५०
३६	तौलिया	at least 1.5m*0.6m in dimension	थान	६५०
३७	फिनेल	White liquid	लिटर	२३०
३८	मालाथिन	Malathion 50% EC	लिटर	१५५०
३९	सेन्ट्रानोल	equivalent to citronella oil produced by HPPCL	लिटर	६२५०
४०	Beneficial Microbes	Yeast & mold 2.4X10 ^{^3} cfu/ml, Total plate count 2.8X10 ^{^7} cfu/ml, Bacillus sps 9.9X10 ^{^4} cfu/ml, Pseudomonas sps 2.1X10 ^{^3} cfu/ml, Lactobacter sps 3.21X10 ^{^3} cfu/ml, Trichoderma sps 2.3X10 ^{^3} cfu/ml, E. Coli - Nil, Salmonella sps - Nil, Shigella sps - Nil, pH : 3.0-6.0, base: Liquid based	लिटर	१००
४१	झिँगा मार्ने औषधी	20g packet, acetamiprid 20% SP	प्याकेट	१२०
४२	टोइलेट क्लिनर	Harpic or equivalent	लिटर	१५०
४३	होज पाईप २"	Hose pipe of dia 2", minimum pressure 8 BAR	मिटर	३१५
४४	सेफ्टी चश्मा	anti fog, anti scratch, UV protection	थान	३२५
४५	अमिसो कूचो	अमिसो	थान	११५
४६	डस्टबिन ७० लिटर	Base 12.5"*12.5", Top lid 17.5"*17.5", Total Height 29.5", Height without lid 22.5", 4.5 kg product weight, with opening on both sides of top lid	थान	५२४०
४७	चुन	४० केजी बोरा	थान	१८००
४८	Hiring of Equipment Chain Excavator (Operating weight 14 Tonnes or equivalent) without fuel but including ownership charge, servicing, maintenance, operator expenses.	for debris clearance, for river cleaning, for landfill site management	Hour	१२००
४९	Compostable bag size of 18" * 22" with tolerance level of ± 3"	compostable	piece	८
५०	Compostable bag size of 24" * 32" with tolerance level of ± 5"	compostable	piece	१५.८
५१	Compostable bag size of 30" * 40" with tolerance level of ± 5"	compostable	piece	४५

म.प्र. नगरपालिका
नगर प्रमुख
सुदूर पश्चिम प्रदेश विकास विभाग

मुक्तिराम उर्राल
प्रमुख प्रशासकीय अधिकृत

संघ संस्थाबाट कार्य गर्दा लिइने सेवा र सामग्री

सि.नं.	खर्च विवरण	उप-विवरण / कैफियत	एकाइ	आ.व.०८३/८४ का लागि सिफारिस दररेट (प्रति एकाइ)
१	प्रशिक्षण भत्ता कार्यपत्र सहित	बाह्य प्रशिक्षक	सेसन	३,४००
२	प्रशिक्षण भत्ता	आन्तरिक प्रशिक्षक	सेसन	१,५००
३	सम्बन्धीत विषयका विज्ञ प्रशिक्षकलाई प्रमुख प्रशासकीय अधिकृतबाट स्वीकृत गराई		सेसन	६,०००
४	यातायात खर्च (सार्वजनिक पदमा रही सवारी साधन पाउने बाहेक अनिवार्य नगरिएको अवस्था हेरी दिन सकिने, कर कट्टा गर्नु पर्ने)		दिन	१,०००
५	कार्यक्रम संयोजक १ जनालाई मात्र भुक्तानी हुने	७ दिन सम्मको अवधिको कार्यक्रमको लागि	दिन	१,०००
६	कार्यक्रम संयोजक १ जनालाई मात्र भुक्तानी हुने	७ दिन भन्दा बढी अवधिको कार्यक्रमको हकमा थप दिनको लागि	दिन	५००
७	कार्यक्रम सहयोगी		दिन	५००
८	सहभागी यातायात खर्च		दिन	२००
९	अपाङ्गता/अशक्त व्यक्तिहरूका लागि यातायात खर्च		दिन	७००
१०	अपाङ्गता/अशक्त व्यक्तिहरूका सहयोगीहरूलाई यातायात खर्च		दिन	२००
११	चिया तथा खाजा/पानी		दिन/व्यक्ति	३००
१२	खाना		दिन/व्यक्ति	५००
१३	सरसफाई खर्च		कार्यक्रम (३ दिन सम्मको)	१,०००
१४	सरसफाई खर्च		कार्यक्रम (३ दिन भन्दा बढी जति दिन भए पनि दिन थप)	३००
१५	सहभागी स्टेशनरी		सहभागी	१५०
१६	कार्यक्रम उदघाटन/समापन		कार्यक्रम/तालिम	३,०००
१७	प्रस्ताव लेखन		कार्यक्रम/तालिम	२,५००
१८	प्रतिवेदन लेखन १ दिनको लागि		कार्यक्रम/तालिम	१,५००
१९	प्रतिवेदन लेखन १ हप्ता सम्मको लागि		कार्यक्रम/तालिम	२,५००
२०	प्रतिवेदन लेखन १ हप्ता भन्दा बढी अवधि सम्मको लागि		कार्यक्रम/तालिम	३,०००
२१	कार्यक्रमको ब्यानर		कार्यक्रम/तालिम	१,०००
२२	कार्यक्रम/तालिमको बैठक भत्ता (पूर्वतयारी छलफल/मध्य पृष्ठपोषण/सम्पन्न तालिम समीक्षा समेत), अनुगमन/निरीक्षण		बैठक/ व्यक्ति	१,२००
२३	विभिन्न शैक्षिक संस्थाहरूबाट इन्टरनेसिप तथा ओजेटी गर्न आउनेहरूलाई विभागको सिफारिसमा हाजिर भएको दिनको यातायात तथा खाजा खर्च वापत		दैनिक	५००

मुक्तिराम अर्याल
प्रमुख प्रशासकीय अधिकृत

परामर्श सेवा

A.	Salary of Personnel	Proposed Basic Salary of Govt. Officials (Rs) for fical year 2081/82	Maximum Grade	Rate of Increment per year (Rs)	Total average Salary (Rs)	Social Cost (40%) (Rs)	Total (Rs)	Remarks
1a	Team Leader (Greater than or equals to 7 years experience)	62,466.00	7	2,082.00	77,040.00	30,816.00	107,856.00	Monthly basic salary is taken equivalent to basic salary Rs. 62466 of gazetted 1st class government officer combined with 7 years increment at the rate of Rs. 2082 per year
1b	Team Leader (6 yrs of experience)	62,466.00	6	2,082.00	74,958.00	29,983.00	104,941.00	Monthly basic salary is taken equivalent to basic salary Rs. 62466 of gazetted 1st class government officer combined with 6 years increment at the rate of Rs. 2082 per year
1c	Team Leader (at least 5 years of experience)	62,466.00	5	2,082.00	72,876.00	29,150.00	102,026.00	Monthly basic salary is taken equivalent to basic salary Rs. 62466 of gazetted 1st class government officer combined with 5 years increment at the rate of Rs. 2082 per year
2a	Regional Planner/Urban Planner(Deputy Team Leader)(Greater than 10 years experience)	53,611.00	8	1,787.00	67,907.00	27,162.00	95,069.00	Monthly basic salary is taken equivalent to basic salary Rs.53611 of gazetted 2nd class government officer combined with 8 years increment at the rate of Rs. 1787 per year
2b	Regional Planner/Urban Planner(Deputy Team Leader)(Greater than 7 years experience)	53,611.00	7	1,787.00	66,120.00	26,448.00	92,568.00	Monthly basic salary is taken equivalent to basic salary Rs.53611 of gazetted 2nd class government officer combined with 7 years increment at the rate of Rs. 1787 per year
2c	Regional Planner/Urban Planner(Deputy Team Leader)(Greater than 5 years experience)	53,611.00	5	1,787.00	62,546.00	25,018.00	87,564.00	Monthly basic salary is taken equivalent to basic salary Rs.53611 of gazetted 2nd class government officer combined with 5 years increment at the rate of Rs. 1787 per year
3	Environmental Expert (Greater than 5 years experience)	53,611.00	5	1,787.00	62,546.00	25,018.00	87,564.00	Same as serial 2
4	Data Analyst/Statician (Greater than 5 years experience)	53,611.00	5	1,787.00	62,546.00	25,018.00	87,564.00	Same as serial 2
5	GIS Expert (Maste's in Geoinformatics or related field)	53,611.00	5	1,787.00	62,546.00	25,018.00	87,564.00	Same as serial 2
6	Economist/Financial Analyst(Greater than 5 years experience)	53,611.00	5	1,787.00	62,546.00	25,018.00	87,564.00	Same as serial 2
7	Sociologist/Community Development Expert(Greater than 5 years experience)	53,611.00	5	1,787.00	62,546.00	25,018.00	87,564.00	Same as serial 2
8	Structural Engineer (Greater than 5 years experience)	53,611.00	5	1,787.00	62,546.00	25,018.00	87,564.00	Same as serial 2
9	W/S and Sanitary Engineer (Greater than 5 years experience)	53,611.00	5	1,787.00	62,546.00	25,018.00	87,564.00	Same as serial 2
10	Geotechnical Engineer (Greater than 5 years experience)	53,611.00	5	1,787.00	62,546.00	25,018.00	87,564.00	Same as serial 2

A.	Salary of Personnel	Proposed Basic Salary of Govt. Officials (Rs) for fiscal year 2081/82	Maximum Grade	Rate of Increment per year (Rs)	Total average Salary (Rs)	Social Cost (40%) (Rs)	Total (Rs)	Remarks
11	HVAC Engineer (Greater than 5 years experience)	53,611.00	5	1,787.00	62,546.00	25,018.00	87,564.00	Same as serial 2
12	Transportation/Highway Engineer (Greater than 5 years experience)	53,611.00	5	1,787.00	62,546.00	25,018.00	87,564.00	Same as serial 2
13	Landscape Architect and other all Experts with Master's Degree except the listed above Engineer (Greater than 5 years experience)	53,611.00	5	1,787.00	62,546.00	25,018.00	87,564.00	Same as serial 2
14	Architect (Bachelor Degree)	48,058.00	5	1,602.00	56,068.00	22,427.20	78,495.20	Monthly basic salary is taken equivalent to basic salary Rs.48058 of gazetted 3rd class government officer combined with 5 years increment at the rate of Rs. 1602 per year
15	Architect (Bachelor Degree)	48,058.00	3	1,602.00	52,864.00	21,145.60	74,009.60	Monthly basic salary is taken equivalent to basic salary Rs.48058 of gazetted 3rd class government officer combined with 5 years increment at the rate of Rs. 1602 per year
16	Architect (Bachelor Degree)	48,058.00	1	1,602.00	49,660.00	19,864.00	69,524.00	Monthly basic salary is taken equivalent to basic salary Rs.48058 of gazetted 3rd class government officer combined with 5 years increment at the rate of Rs. 1602 per year
17	Civil Engineer (Bachelor Degree)	48,058.00	5	1,602.00	56,068.00	22,427.20	78,495.20	Monthly basic salary is taken equivalent to basic salary Rs.48058 of gazetted 3rd class government officer combined with 5 years increment at the rate of Rs. 1602 per year
18	Civil Engineer (Bachelor Degree)	48,058.00	3	1,602.00	52,864.00	21,145.60	74,009.60	Monthly basic salary is taken equivalent to basic salary Rs.48058 of gazetted 3rd class government officer combined with 5 years increment at the rate of Rs. 1602 per year
19	Civil Engineer (Bachelor Degree)	48,058.00	1	1,602.00	49,660.00	19,864.00	69,524.00	Monthly basic salary is taken equivalent to basic salary Rs.48058 of gazetted 3rd class government officer combined with 5 years increment at the rate of Rs. 1602 per year
20	GIS Engineer (Bachelor's Degree in Geomatics Engineering)	48,058.00	5	1,602.00	56,068.00	22,427.20	78,495.20	Monthly basic salary is taken equivalent to basic salary Rs.48058 of gazetted 3rd class government officer combined with 5 years increment at the rate of Rs. 1602 per year

प्रमुख प्रशासकीय अधिकृत
प्रमुख प्रशासकीय अधिकृत
प्रमुख प्रशासकीय अधिकृत

मुक्तिराम अर्याल
प्रमुख प्रशासकीय अधिकृत

A.	Salary of Personnel	Proposed Basic Salary of Govt. Officials (Rs) for fical year 2081/82	Maximum Grade	Rate of Increment per year (Rs)	Total average Salary (Rs)	Social Cost (40%) (Rs)	Total (Rs)	Remarks
21	Senior Surveyor (Bachelor's Degree in Geomatics Engineering)	48,058.00	5	1,602.00	56,068.00	22,427.20	78,495.20	Monthly basic salary is taken equivalent to basic salary Rs.48058 of gazetted 3rd class government officer combined with 5 years increment at the rate of Rs. 1602 per year
22	All officer level posts all with minimum 5 years work experiences (Managers, Administrators, Lawyers, Computer Engineer, It Officer etc.)	48,058.00	5	1,602.00	56,068.00	22,427.20	78,495.20	Monthly basic salary is taken equivalent to basic salary Rs.48058 of gazetted 3rd class government officer combined with 5 years increment at the rate of Rs. 1602 per year
23	All officer level posts all with minimum 3 years work experiences (Managers, Administrators, lawyers, Computer Engineer etc.)	48,058.00	3	1,602.00	52,864.00	21,145.60	74,009.60	Monthly basic salary is taken equivalent to basic salary Rs.48058 of gazetted 3rd class government officer combined with 5 years increment at the rate of Rs. 1602 per year
24	All officer level posts all with minimum 1 years work experiences (Managers, Administrators, lawyers, Computer Engineer etc.)	48,058.00	1	1,602.00	49,660.00	19,864.00	69,524.00	Monthly basic salary is taken equivalent to basic salary Rs.48058 of gazetted 3rd class government officer combined with 5 years increment at the rate of Rs. 1602 per year
Support Staff								
a.	Junior Surveyor (Diploma in Geomatics Engineering)	38,203.00	3	1,273.00	42,022.00	16,808.00	58,830.00	Monthly basic salary is taken equivalent to basic salary Rs.38203 of non-gazetted 1st class government officer combined with 3 years increment at the rate of Rs. 1273 per year
b.	Office Manager/Computer Operator	38,203.00	3	1,273.00	42,022.00	16,808.00	58,830.00	Monthly basic salary is taken equivalent to basic salary Rs.38203 of non-gazetted 1st class government officer combined with 3 years increment at the rate of Rs. 1273 per year
c.	Sub Engineer/CAD operator	38,203.00	3	1,273.00	42,022.00	16,808.00	58,830.00	Monthly basic salary is taken equivalent to basic salary Rs.38203 of non-gazetted 1st class government officer combined with 3 years increment at the rate of Rs. 1273 per year

* The salary rate is calculated in such a way that it includes 40% Social Cost of Salary (Includes cost of staffs pension, medical and life insurance, staff Being sick or on a vacation) (Ref. PWD Part III 2002, RFP Consultant Services:16; ADB/ Handbook For Users of Consulting Services, 1993:47)

मुक्तिराम अर्याल
प्रमुख प्रशासकीय अधिकृत

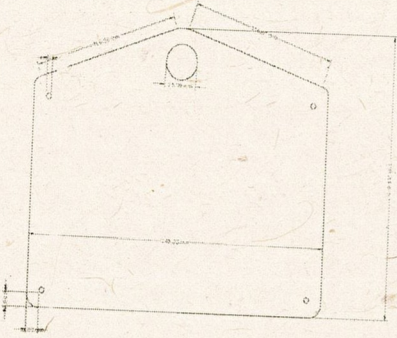
होटल तथा रिसोर्टमा गरिने कार्यक्रम सम्बन्धित


S.N	Item/Description	Unit	Proposed Rate for fiscal year 2083/84	Remarks
1	Single basis Standard Room or equivalent without Breakfast/Lunch/Dinner	per day per pax	3,097	this rate applies only to hotels below 5 stars.
2	Sharing basis Standard Room or equivalent without Breakfast/Lunch/Dinner	per day per pax	1,770	
3	Single basis Deluxe room or equivalent without Breakfast/Lunch/Dinner	per day per pax	3,540	
4	Sharing basis Deluxe room or equivalent without Breakfast/Lunch/Dinner	per day per pax	2,212	
5	Single basis ex-suite room or equivalent without Breakfast/Lunch/Dinner	per day per pax	3,982	
6	Sharing basis ex-suite or equivalent without Breakfast/Lunch/Dinner	per day per pax	2,655	
7	Single basis Standard Room or equivalent with Breakfast/Lunch/Dinner	per day per pax	4,425	
8	Sharing basis Standard Room or equivalent with Breakfast/Lunch/Dinner	per day per pax	3,097	
9	Single basis Deluxe room or equivalent with Breakfast/Lunch/Dinner	per day per pax	4,867	
10	Sharing basis Deluxe room or equivalent with Breakfast/Lunch/Dinner	per day per pax	3,540	
11	Single basis ex-suite room or equivalent with Breakfast/Lunch/Dinner	per day per pax	5,310	
12	Sharing basis ex-suite or equivalent with Breakfast/Lunch/Dinner	per day per pax	4,425	
13	Breakfast	per pax	442	
14	Tea-cookies	per pax	88	


S.N	Item/Description	Unit	Proposed Rate for fiscal year 2083/84	Remarks
15	Lunch	per pax	664	
16	Hi-Tea	per pax	221	
17	Dinner	per pax	664	
18	Mineral Water	per ltr/bottle	53	
19	Packet of Juice (Min. 1 ltr)	per ltr	398	
20	Fresh Juice	per glass	133	
21	Snacks	per pax.	487	
22	Projector	per day	442	
23	Seminar Hall (of capacity min 25 pax)	per day	10,000	
24	Seminar Hall (of capacity 25-50 pax)	per day	15,000	
25	Seminar Hall (of capacity 50-100 pax)	per day	25,000	
26	Seminar Hall (of capacity >100 pax)	per day	35,000	

[Signature]
 १. काप
 प्रमुख
 विभाग

[Signature]
 मुक्तिराम अर्याल
 प्रमुख प्रशासकीय अधिकृत

क्र.स.	Equipment Details	Specifications	Unit	आ.ब०८३१८४ को लागि सिफारिस दररेट (प्रति एकाइ)
१.		• Type: Smart, illuminated, NFC-enabled aluminium address plate for permanent outdoor installation. • Panel: Aluminium Sandwich Panel (ASP), minimum 3 mm thickness, with 0.25 mm front and 0.21 mm rear aluminium skins and PE core. • Dimensions: 19.884 cm x 24 cm, with oval-finished corners and four pre-drilled 4 mm mounting holes. • Surface Finish: UV-resistant PVDF coating, approximately 25–30 µm, Navy Blue/Pantone PMS 282C, matte/satin finish. • Durability: Minimum 10-year outdoor service life, resistant to UV, moisture, corrosion, abrasion and normal weather conditions. • NFC Tag: Embedded 13.56 MHz ISO 14443-A NFC tag with minimum 1 KB memory, unique UID, read/write and locking/security features. • NFC Protection: Epoxy-resin coated, waterproof and moisture-resistant, with anti-metal backing and outdoor-grade adhesive. • Luminous Feature: Photoluminescent material providing afterglow visibility during low-light/night conditions. • Laser Marking: Permanent industrial fibre-laser engraving/marking directly on the PVDF-coated aluminium surface. • Marking Content: House number, digital address/GUIDE ID, QR code, NFC identifier and other approved address information. • Marking Quality: High-resolution, machine-readable, durable and resistant to fading, peeling and abrasion; no ink or consumable required. • Mounting: Suitable for secure fixing to exterior walls/buildings using the provided mounting holes.	Pcs	८००.००


 महेश कुमार कापले
 विभागीय प्रमुख
 प्रशासन विभाग


 मुक्तिराम अर्याल
 प्रमुख प्रशासकीय अधिकृत